


FUJITSU THERMAL PRINTER

FTP-639USL

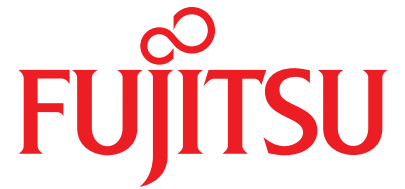

Fujitsu's kiosk thermal printer, the FTP-639USL, achieves high reliability and cost-efficiency for receipt or die-cut label printing with Self-Service systems.

- High-speed 125 or 200 mm/s
- Drop-in or spool media loading
- Small footprint
- Horizontal use
- External power supply
- Running cost saving mode
- Fujitsu Green Product
- RoHS compliant



shaping tomorrow with you

FUJITSU FTP-639 USL Specifications

Printing technology			Direct line thermal method				
Print resolution			8dot/mm (0.125mm/dot) 203dpi				
Printing speed			Maximum 125mm/s or 200mm/s(monochrome only)				
Paper feed-out direction			Front feed				
Cutter method			Full or partial cut				
Installation direction			One way (horizontal)*1				
Paper	Width		80 or 82.5mm				
	Outer diameter of paper roll		83 or 150mm				
	Thickness		65μm -100μm				
Maximum print width	82.5 mm width paper		80mm (576dots) or 82.5mm (640dots)				
Font size and column			203dpi (normal mode)				
			Half size (column)	Full size (column)	OCRI	OCRIII	OCRIV
	Paper width 82.5mm	Body face	12x24 (53)	24x24 (26)	24x40 (26)	24x48 (26)	36x60 (17)
		Letter face	8x16 (80)	16x16 (40)			
Character sets			ANK (159 char.), international character (195 char.),OCR (103), download graphics (94 char.)				
Barcode	Barcode		UPC-A, UPC-E, JAN13 (EAN), JAN8 (EAN), CODE39, ITF, CODABAR (NW-7), CODE93, CODE128				
	Two dimensional code		QR, MAXI, PDF 417				
Receive buffer			Maxium 2M bits				
Logo store memory			Maximum 16M bits				
Paper Near End and Paper End			Available				
LEDs			Available				
Interface	USB		USB V2.0				
	RS232C		Serial up to 460kpbs				
Software interface			ESC/POS emulation				
Software	Printer driver	Windows®	Windows® driver	Windows® 7, Windows Vista®, Windows® XP, Windows® 2000, Windows® CE5.0			
			OPOS driver (ver.1.13)				
		Linux	Red Hat, Fedora, Turbo, Laser, SUSE, Ubuntu				

Reliability	MCBF (mean-cycle-between-failure)		45 million lines*2				
	Print head		100km*2				
	Cutter		500,000 cuts or 1,000,000 cuts				
	Platen		5,000 cycles				

Power requirements		Input: 24V only
Power consumption		Average during operating 730mW or less, maximum 2.0W
Ambient temperature		Operation guarantee: 0°C to 50°C, print quality guarantee: 5°C to 40°C
Relative humidity		Operation guarantee: 10% RH to 95% RH, print quality guarantee: 10% RH to 85% RH
Dimensions	FTP-639USL000	141 (W) x 185 (D) x 104 (H)mm
	FTP-639USL100	120 (W) x 100 (D) x 80 (H)mm
Weight (without the packing box)		Standard model: 990g, 1.3kg
Cover color		Stainless steel
Option		External presenter

Notes: *1: When using printer vertically.

*2: Operation condition is under 500 transactions/day (1 transaction=25LF + 1 cut), 340 days/year, print duty less than 12.5%, and the life of head by using paper specified by Fujitsu. If unspecified paper is used, the life of printer might be shorter or problems with printer might occur.

*3: JavaPOS driver supports RS232C interface and USB interface.

Contact

North and South America

Fujitsu Components America, Inc.
250 E. Caribbean Drive
Sunnyvale, CA 94089 U.S.A.
Tel: (1-408) 745-4900
Fax: (1-408) 745-4970
Email: components@us.fujitsu.com
Web: <http://us.fujitsu.com/components/>

Europe

Fujitsu Components Europe B.V.
Diamantlaan 25
2132 WV Hoofddorp
Netherlands
Tel: (31-23) 5560910
Fax: (31-23) 5560950
Email: info@fceu.fujitsu.com
Web: emea.fujitsu.com/components/

Asia Pacific

Fujitsu Components Asia Ltd.
102E Pasir Panjang Road
#01-01 Citilink Warehouse Complex
Singapore 118529
Tel: (65) 6375-8560
Fax: (65) 6273-3021
Email: fcal@fcal.fujitsu.com
Web: <http://www.fujitsu.com/sg/services/micro/components/>

©2011 Fujitsu Components America, Inc. All rights reserved. All trademarks or registered trademarks are the property of their respective owners. Fujitsu Components America or its affiliates do not warrant that the content of datasheet is error free. In a continuing effort to improve our products Fujitsu Components America, Inc. or its affiliates reserve the right to change specifications/datasheets without prior notice.
Rev. June 14, 2011.