Q

HOME ABOUT US -

PRODUCTS •

LATEST PRODUCTS

CATALOG -

NEWS

CONTACT US -


Home » Category » Bushings » Strain Relief Bushing



Spacer Support (SUP-23A)

Provide space and support between circuit boards, joint PCB with chassis and other board.

More

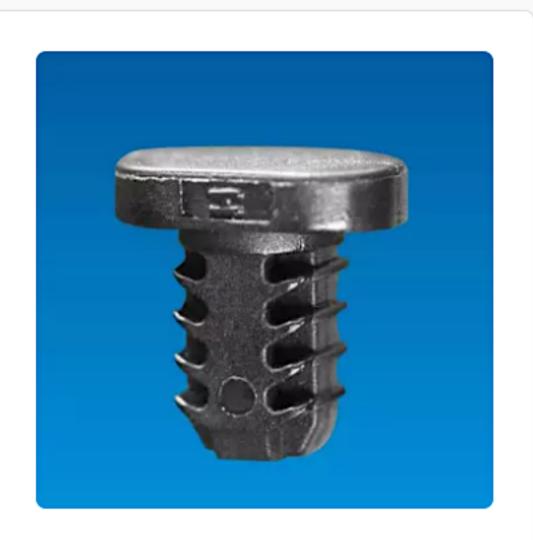

Canoe Clip (MBT-06)

Flat head design, easily assembly.

More

PROFESSIONAL MANUFACTURER
OF STRAIN RELIEF BUSHING |
MECHANICAL COMPONENTS PINGOOD

PINGOOD ENTERPRISE CO., LTD. is a Strain Relief Bushing | mechanical component manufacturer from Taiwan with 40 years of experience, since 1982.

PINGOOD's mechanical component is ISO certified and professionally made to meet high standards. Mechanical components including Rotary damper, Push latch, Spacer support, Plastic fastener, Cable management, LED Housing, Bushing, Light pipe, Wire saddle, Plastic foot.

PINGOOD's plastic mechanical component is applicable in computer, electronic, electric machinery and automotive related products.

View our quality products <u>Bushing</u>, <u>Spacer Support</u>, <u>Damper</u>, <u>Latche</u>, <u>LED</u> <u>Hardware</u>, <u>Plastic Fastener</u>, <u>Cable</u> <u>Management</u>, <u>Cable Clamp</u>, <u>Circuit</u> <u>Board Ejector</u>, <u>PCB Guide Rail</u>, <u>Plastic</u> <u>Foot</u>, <u>Connector</u>, <u>Washer</u>, <u>Housing</u>, <u>Mount</u>, <u>Holder</u>, <u>Clamp</u>, <u>Wire Saddle</u>, <u>Cover</u> and feel free to <u>Contact Us</u>.

STRAIN RELIEF BUSHING

Send Inquiry


2RF-2


FEATURES

- Absorb the forces of push and pull that may be exerted on cords.
- Easy and low-cost to insulate and prevent the ac cord to be damaged by the panel edge.
- Provide non-slip grip.
- Completed range of specification.
- UL E88476 Approval strain relief bushing.


SPECIFICATION


- MATERIAL: NYLON66 (UL)
- FLAME CLASS: 94V-2
- COLOR: BLACK
- PG cord bushings are the easy and low-cost way to insulate and protect your AC cords
- Provide non-slip grip and will not damage the insulation of AC cord

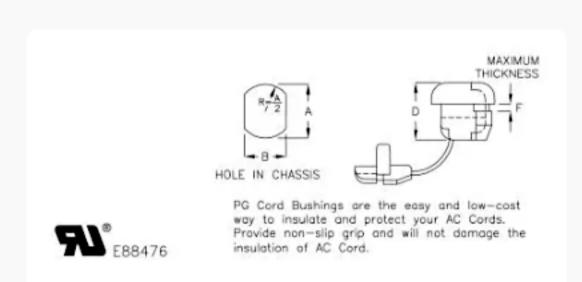

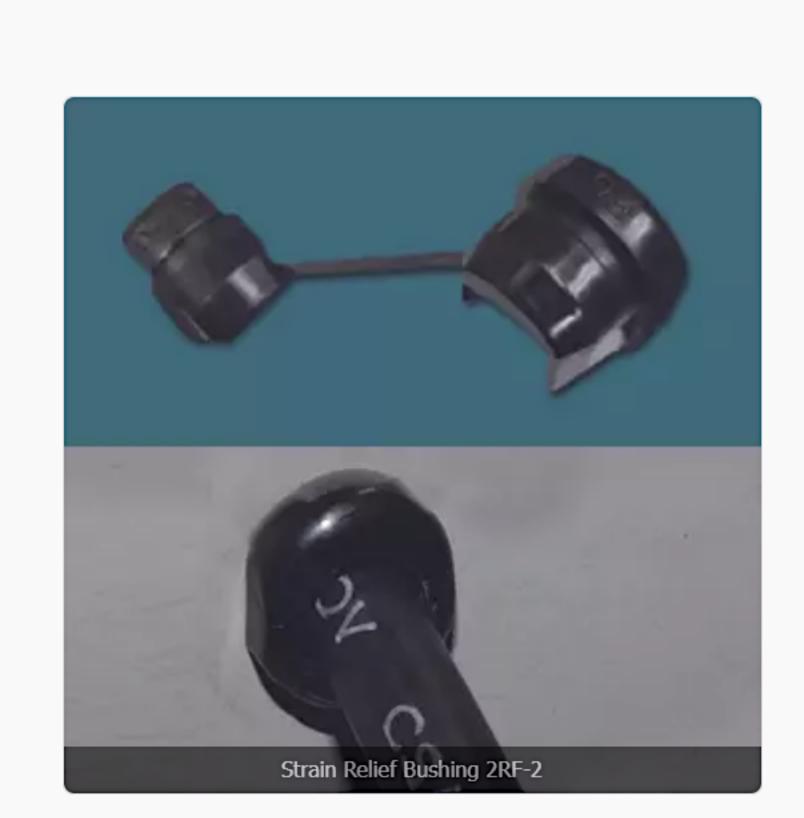

		SUITABLE CABLE	TVDE 9 DIM	IENGIO	NE OF CHARRIE				
PART NO	CROSS SECTION SHAPE	WIRE ACCOMMODATED	SIZE	A	B TO PREVENT ROTATION	F MAXIMUM THICKNESS	D PART LENGTH	UL	PACKAGE
2RF-2	FLAT	SPT-1	2.8x5.3	9.5	8.7	3.2	10.8	UL	500
3RF-1	FLAT	SPT-2	3.0x5.6	11.1	9.9	2.6	10.3		
3RF-2	FLAT	SPT-2	3.0x5.6	11.1	10.1	1.6	10.3	UL	
4RF-4	FLAT	SPT-2	3.0x5.6	12.7	11.5	2.5	11.2	UL	
4RF-5	FLAT	SPT-2	3.8x7.6	12.7	11.8	1.6	10.4	UL	
4RF-6	FLAT	SPT-2	3.0x6.5	12.5	11.6	2.7	10.5	UL	
5R-2	ROUND	SVI	7.6	12.7	11.5	1.6	11.3		
5R-4	ROUND	SV,SVT	6.4	12.7	11.5	1.6	11.3	UL	
5R-4A	ROUND	SV,SVT	6.4	12.7	11.5	2.5	11.0	UL	
5RF-4	FLAT	SPT-2 SPT-3	3.8x8.9 5.0x10.0	14.3	13.4	1.6	15.45	UL	200
6R-4	ROUND	SVI	7.6	15.9	14.0	1.6	14.9	UL	
6R-6	ROUND	SJ,SJT	8.2	15.9	14.0	1.6	14.5	UL	
6R-6A	ROUND	SJ,SJT	8.2	15.9	14.0	3.2	14.5		
7R-2	ROUND	S,ST	9.2-10.5	19.0	16.8	1.6	19.0	UL	100
			11.0	19.8					
7R-2A	ROUND	S,ST	9.2-10.5	19.0 19.8	16.8	3.2	19.0	UL	
7R-2LT	ROUND	SJT	9.6-10.0	19.0	16.8	1.0	15.0		
8R-2	ROUND	SJT	13.5-15.2	22.2	21.5	3.2	20.0	UL	
8R-2A	ROUND	SJT	13.5	23.0	22.0	2.0	19.9		
9R-2	ROUND	SJT	15.2-16.3	28.0	25.2	2.4	25.6		50
			17.5	30.2	25.2	6.7			
9R-2A	ROUND	SJT	15.5	28.0	25.2	2.4	14.5		100
9R-2B	ROUND	SJT	18.2	28.0	25.2	2.4	23.9		50

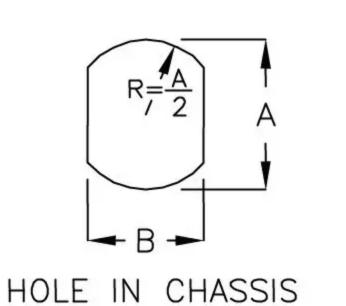

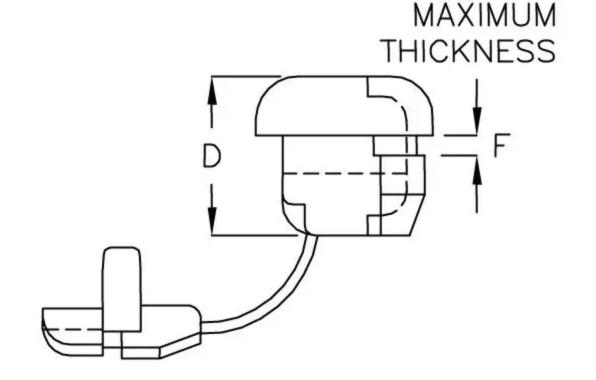



PG Cord Bushings are the easy and low—cost way to insulate and protect your AC Cords. Provide non—slip grip and will not damage the insulation of AC Cord.