
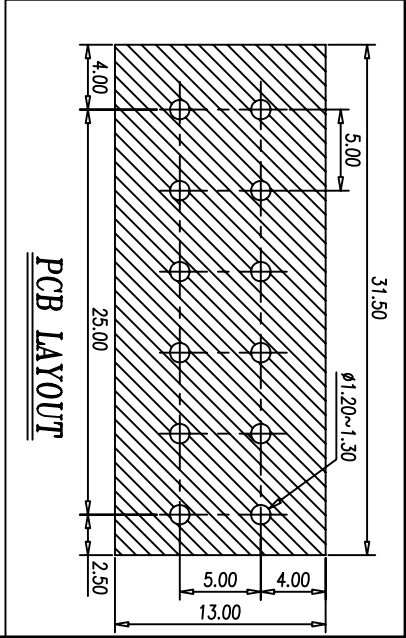


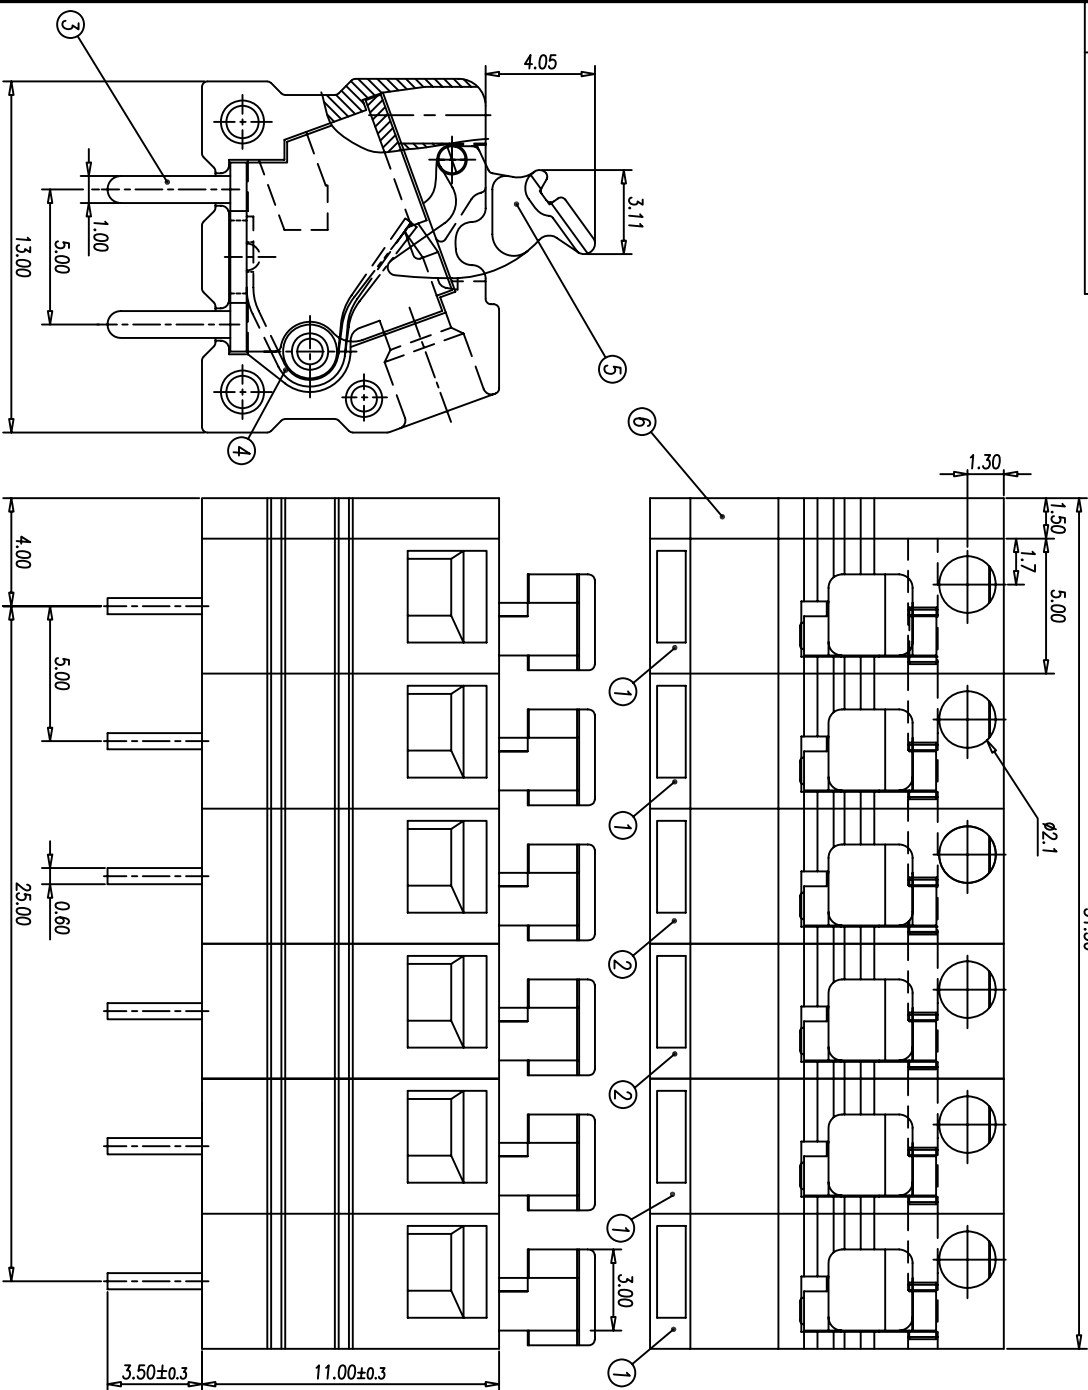

NOTES:

1. Rating: 300V 10A
PITCH: 5.00mm
2. Insulation Withstands Voltage:
AC 2000V at 1 munite
3. Insulation Resistance:
500M Ω or more at DC500V
4. Using Temperature Range:
-40C~+105C
5. Suitable Electric Wire:
SOLID WIRE: AWG 26~14
STRAND WIRE:AWG 26~16
6. RoHS Compliance

Normal Geometric Tolerancing

	—	—	—	—
0 to 100	0.2	0.3	0.5	0.2
over 100 to 150	0.3	0.5	0.7	0.3
over 150	0.5	0.7	1.0	0.5

Total Pitch Tolerances	Normal dimension
0<L<=30	±0.20
30<L<=53	±0.25
53<L<=70	±0.30
70<L<=90	±0.35
90<L<=115	±0.40
115<L<=150	±0.45
150<L<=200	±0.50

Normal Geometric Tolerancing	Normal dimension
0<L<=30	±0.20
30<L<=53	±0.25
53<L<=70	±0.30
70<L<=90	±0.35
90<L<=115	±0.40
115<L<=150	±0.45
150<L<=200	±0.50

REV.	CONTENT	CHK.	DATE
1		LCY	10.11.03

DWG.	LCY	DATE	10.11.03	NAME	0137-11-S1052106
CHK.		DATE		NAME	
APP.		DATE		NAME	

DINKLE	ENTERPRISE CO.,LTD	DWG NO.	SP-03-01370521
--------	--------------------	---------	----------------