
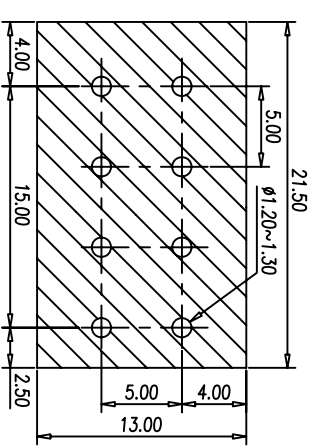


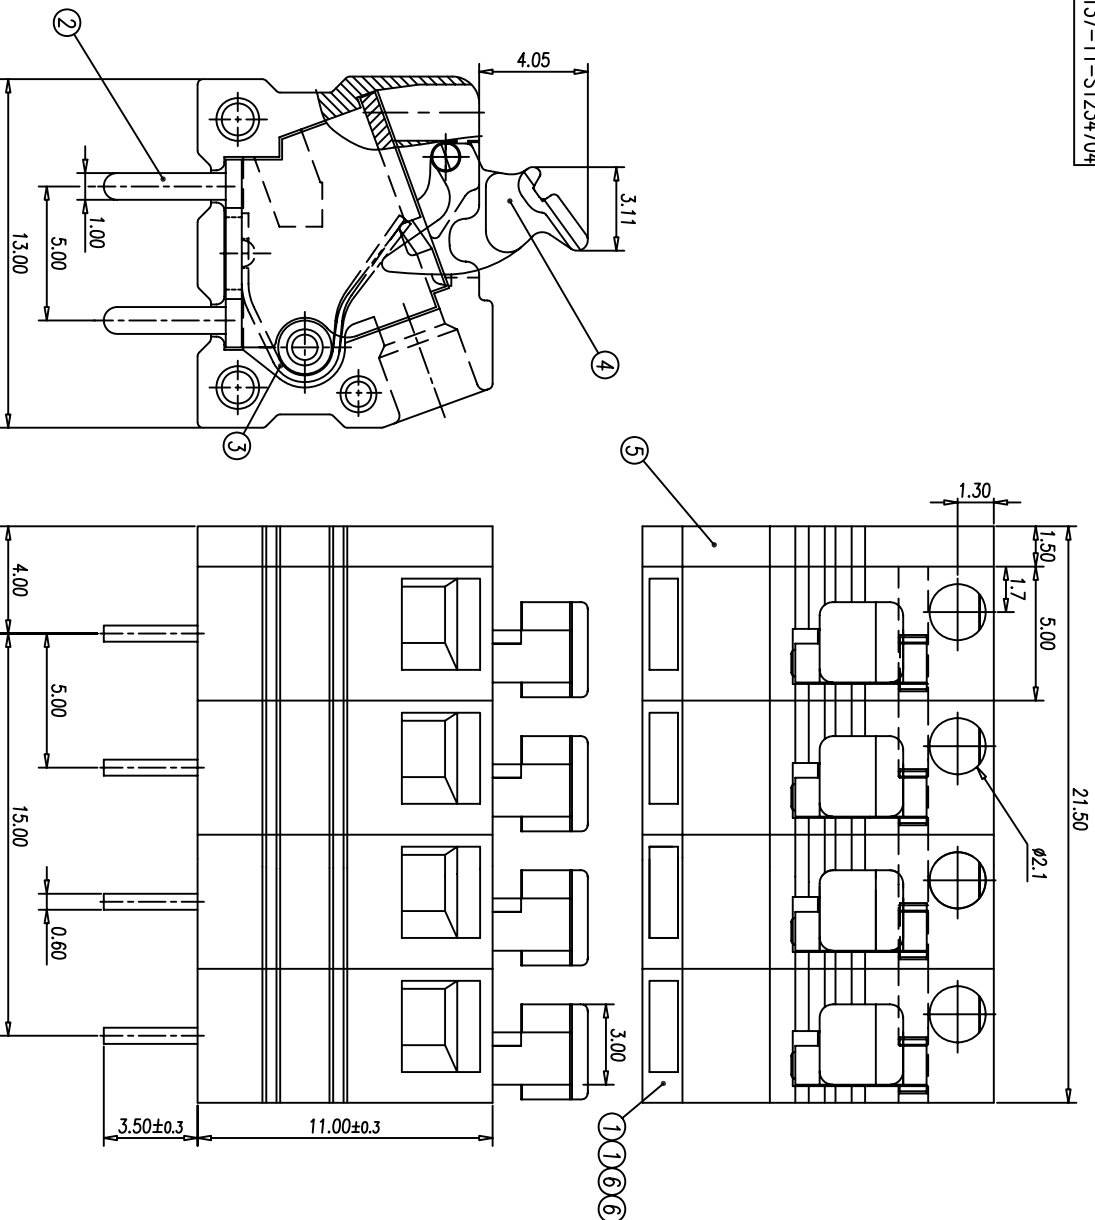

NOTES:

1. Rating: 300V 10A
Pitch: 5.00mm
2. Insulation Withstands Voltage:
AC 2000V/MIN
3. Insulation Resistance:
500M Ω or more at DC500V
4. Using Temperature Range:
-40°C~+105°C
5. Suitable Electric Wire:
SOLID WIRE: AWG 26~14
STRAND WIRE: AWG 26~16
6. RoHS Compliance

6	HOUSING2	PA66	UL94-V0 BLUE
5	COVER	PA66	UL94-V0 GREY
4	LEVER	POM	WHITE
3	CLAMP	STEEL	

DWG.	HD	DATE	14.07.15	UNITS	MM	SHEET/OF	1 / 1
CHK.		DATE		SCALE	5:1 (:)	 	
APP.		DATE					

REV.	CONTENT	CHK.	DATE	 DINKLE ENTERPRISE CO.,LTD	NAME	0137-11-S1234704
		HD	14.07.15			