

RoHS COMPLIANT






REV	ECN NO.	DESCRIPTION	DATE
A		RELEASE	JUN. 27'16

■ SPECIFICATIONS


- Current Rating : 7A AC/DC
- Withstanding Voltage : 1500V AC/minute
- Insulation Resistance : 1000MΩ min
- Temperature Range : - 25°C to + 105°C
- Contact Resistance : 20mΩ max

■ WAFER

- Material : Contact : Brass, Tin Plated
Base : Nylon 66 UL94V-0
- 'Q' ty: 1000 pcs./Bag

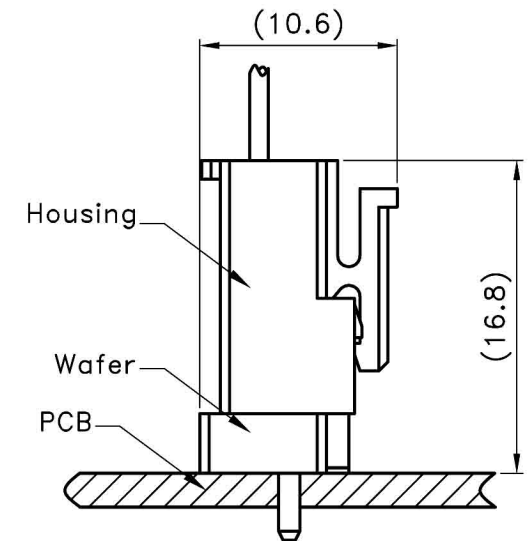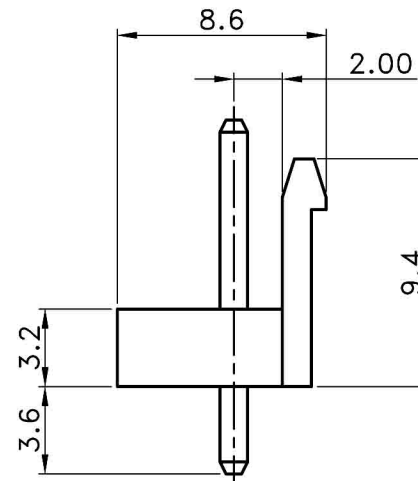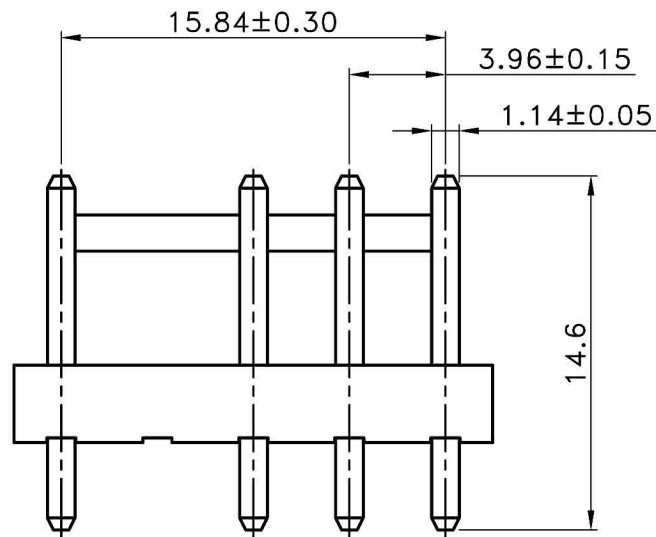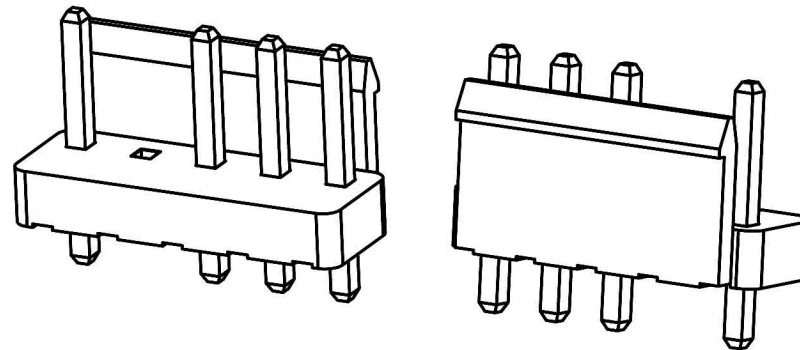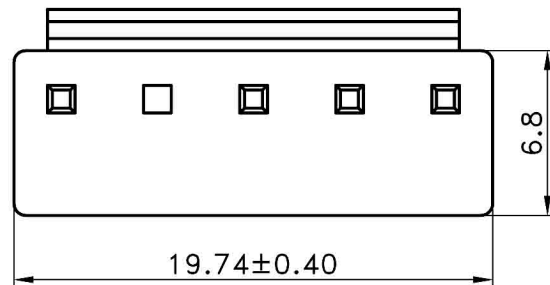

Recommend Assembly Dim

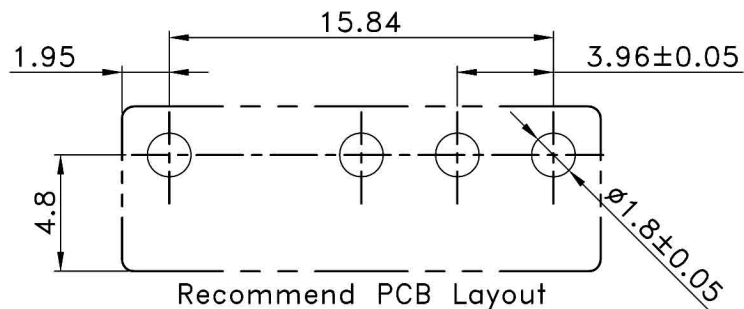

Recommend PCB Layout

TOLERANCE UNLESS OTHERWISE SPECIFIED

LINEAR	ANGLE
X. ± 0.35	X° ±
.XX ± 0.25	.XX° ±
.XXX ±	.XXX° ±
APPD	
CHKD	
DRAW	Z
	JUN. 27'2016

PROJECTION

UNITS
MM
SCALE
SIZE
A4

GTK GOLD-TEK ELECTRIC CO., LTD.

TITLE	PART NO.
3.96mm Wafer 5Pin Straight Dip, 2nd Pos. Omitted	112005ST-2V
CAD NO. I0056A	SHEET
F:\PDF\HW\HW-A0218	1 OF 1
CPART NO.	

圖面編號:GTKGS2355-A(1)