


REV	ECN NO.	DESCRIPTION	DATE
A		RELEASE	JUL/18/2003

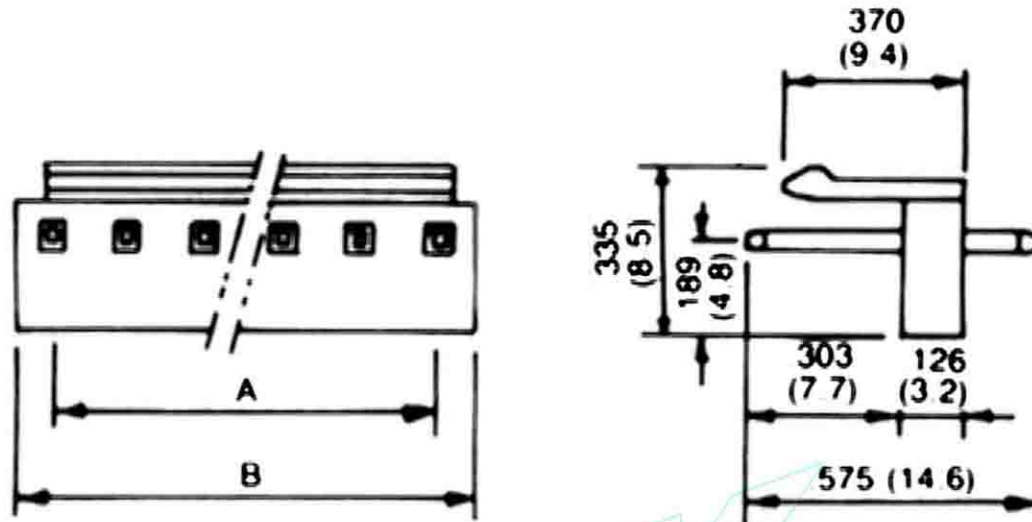

## ■ SPECIFICATIONS

- Pole : 1 - 20
- Voltage rating : 250V AC, DC
- Current rating : 7AAC, DC
- Withstanding voltage : 1500V AC/minute
- Insulation resistance : 1000MΩ min.
- Temperature range : -25℃ to +85℃  
(Including temperature rise in applying electrical current)
- Applicable PC board thickness : 0.063"(1.6mm)
- Contact resistance : Initial value/10m Ω max.  
After environmental testing/20m Ω max.

## ■ WAFER

- Part No : 1120\*\*ST
- Material: Contact:Brass,Tin plated  
Base: Nylon 66 UL 94V-0
- Q'ty: 500, 1000 pcs/bag

Poles	Part No.	Dimensions in.(mm)		Material	
		Top entry type	A		B
2	1120 02		.156(3.96)	.309(7.86)	Nylon 66 UL94V-0
3	1120 03		.312(7.92)	.465(11.82)	
4	1120 04		.468(11.88)	.621(15.78)	
5	1120 05		.624(15.84)	.777(19.74)	
6	1120 06		.780(19.80)	.933(23.70)	
7	1120 07		.935(23.76)	1.089(27.66)	
8	1120 08		1.091(27.72)	1.245(31.62)	
9	1120 09		1.247(31.68)	1.401(35.58)	
10	1120 10		1.403(35.64)	1.557(39.54)	
11	1120 11		1.560(39.60)	1.732(44.00)	
12	1120 12		1.715(43.56)	1.890(48.00)	

TOLERANCE UNLESS OTHERWISE SPECIFIED		PROJECTION	GOLD-TEK ELECTRIC CO., LTD.	
LINEAR	ANGLE	UNITS	TITLE	PART NO.
X. ±	X° ±	MM		1120**ST
.X ±	.X° ±	SCALE		CAD NO.
.XX ±	.XX° ±	SIZE		F:\DRW\HW\HW-A0021
.XXX±	.XXX° ±	A4		SHEET
APPD			CPART NO.	1 OF 1
CHKD				
DRAW	Z JUL, 18. 03			

圖面編號:GTKSD1116-A(1)