


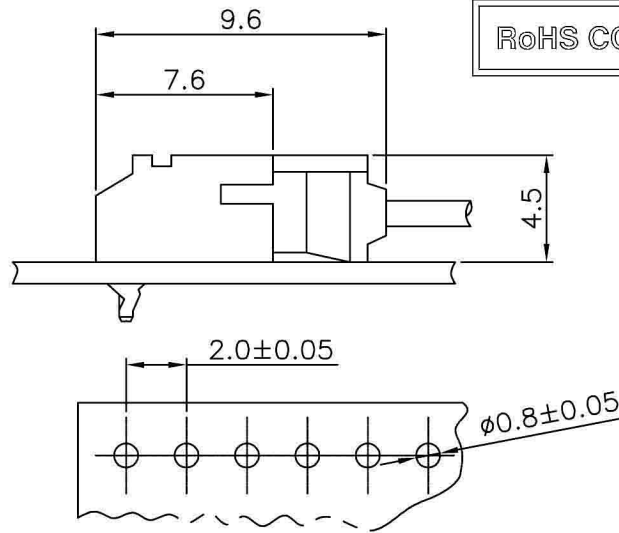
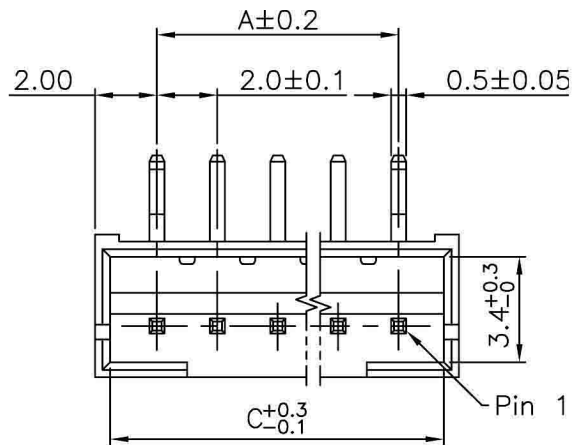



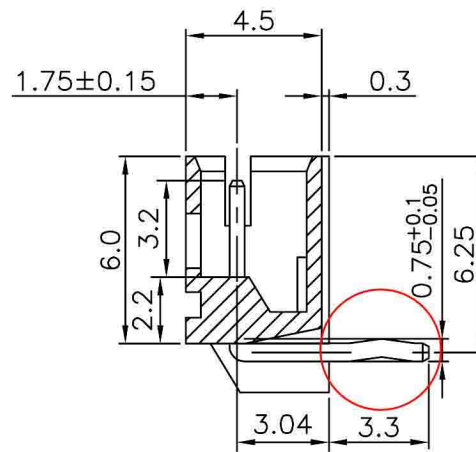

RoHS COMPLIANT

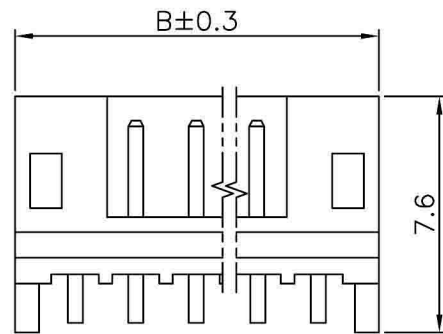

Standard Type



Kink Type

REV	ECN NO.	DESCRIPTION	DATE
A		RELEASE	SEP. 19'03
B		ADD. RoHS	JUL. 18'06
C		MODIFY P/N	OCT. 28'08
D		MODIFY P/N	APR. 28'11

SPECIFICATIONS

- Voltage Rating : 100V AC/DC
- Current Rating : 2A AC/DC
- Withstanding Voltage : 800V AC/minute
- Insulation Resistance : 1,000M Ω min
- Temperature Range : - 25°C to + 85°C
- Contact resistance : 20m Ω max

WAFER

- Poles : 2-16
- Material : Contact : Brass, Tin Plated
Base : Nylon 66 UL94V-0
- Q' ty : 1,000 pcs/Bag

Poles	Dimensions (mm)		
	A	B	C
2	2.00	6.00	5.00
3	4.00	8.00	7.00
4	6.00	10.00	9.00
5	8.00	12.00	11.00
6	10.00	14.00	13.00
7	12.00	16.00	15.00
8	14.00	18.00	17.00
9	16.00	20.00	19.00
10	18.00	22.00	21.00
11	20.00	24.00	23.00
12	22.00	26.00	25.00
13	24.00	28.00	27.00
14	26.00	30.00	29.00
15	28.00	32.00	31.00
16	30.00	34.00	33.00

TOLERANCE UNLESS OTHERWISE SPECIFIED

LINEAR	ANGLE
X. $\pm$	X° $\pm$
.X $\pm$ 0.30	.X° $\pm$
.XX $\pm$ 0.20	.XX° $\pm$
.XXX $\pm$	.XXX° $\pm$

APPD
CHKD
DRAW Z. APR. 28'2011

PROJECTION



UNITS

MM

SCALE

SIZE

A4



GOLD-TEK ELECTRIC CO., LTD.

TITLE
2.00mm Wafer Conn.

CPART NO.

PART NO.
1125**RT(-K)

CAD NO. 1056
F:\PDF\HW-A\HW-A0153
SHEET
1 OF 1

圖面編號:GTKSD1151-D(1)