

REV	ECN	NO.	DESCRIPTION	DATE
A			RELEASE	JUN.10.02
B			MODIFY PART_NO	SEP.23.02
C			MODIFY NOTE	DEC.05.02


SPECIFICATION

- *Voltage rating: 50V AC, DC
- *Current Rating: 0.7A, AC, DC
- *Withstand voltage: 500V AC/minute
- *Insulation resistance: 500MΩ min
- *Temperature range: -25°C ~ +85°C
- *Applicable PC board thickness: .024"(.6mm) ~ .047"(1.2mm)
- *Contact resistance: Initial Value/10mΩ max
- After environmental testing/20mΩ max

TERMINAL

- *Part No: 1173T
- *Applicable wire: AWG#28~32
- *Material: Phosphor bronze
- *Finish: T-Tin Plated
- *Hardness: SH
- *Thickness: 0.2mm
- *Q'ty: 15000pcs/roll

Note:1173T (JST P/N SZH-003T-P0.5)

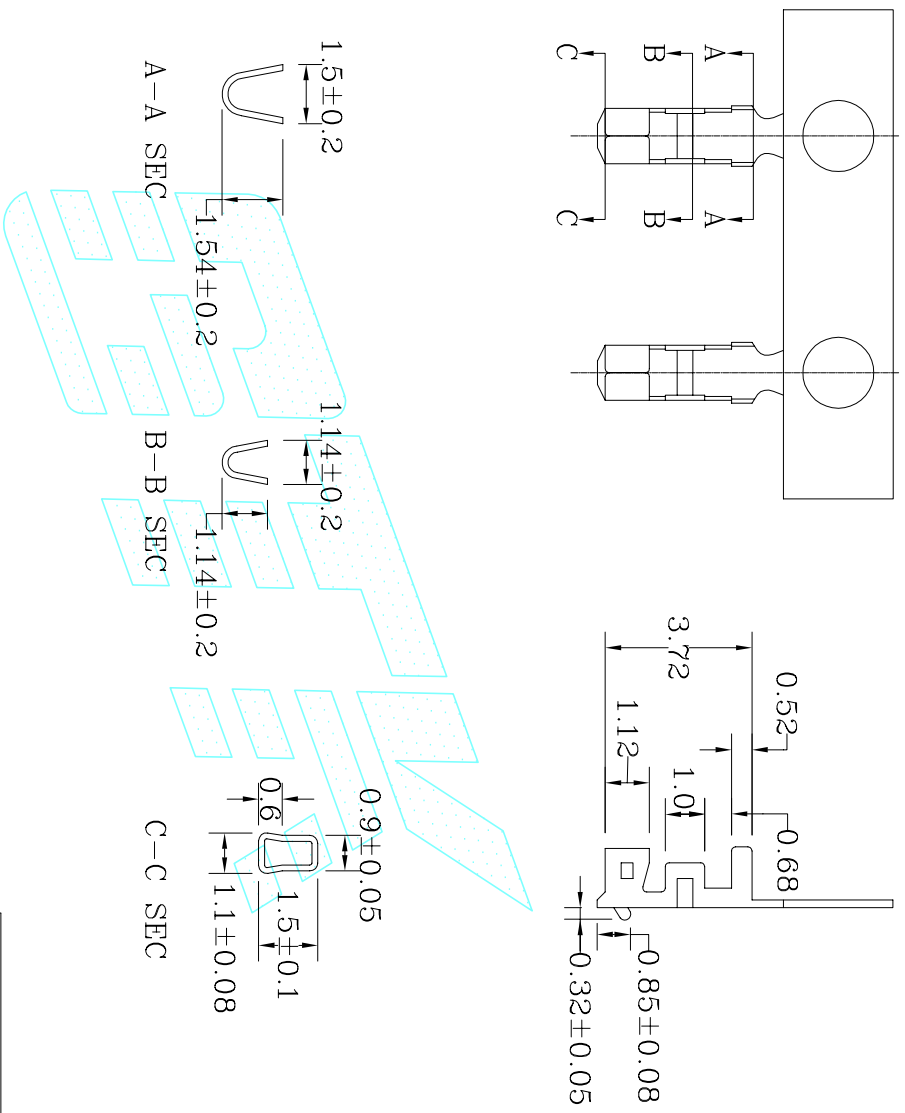

TOLERANCE UNLESS OTHERWISE SPECIFIED		PROJECTION		TITLE	
LINEAR	ANGLE	UNITS	TERMINAL FOR	PART NO.	
X ±	X° ±	MM	1173**	1173T	SHEET
.X ± 0.2	.X° ±		1.5MM PITCH		1 OF 1
.XX ±	.XX° ±	SCALE	C/PART NO		
.XXX ±	.XXX° ±	SIZE			
APPD		A4			
CHKD					
DRAW	Tao.Tao.				
	DEC.05.2002				

GOLD-TEK ELECTRIC CO., LTD.

CAD NO. 1056

F:\Drw\HW\HW-0010

圖面編號:GTKSD0984-C(1)