

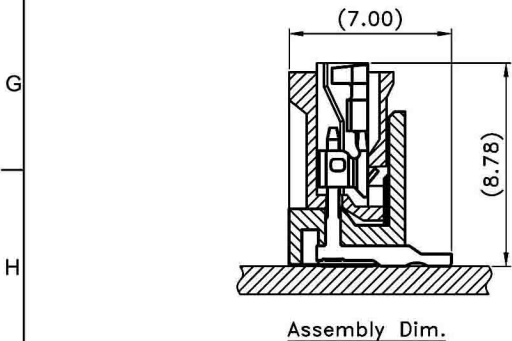
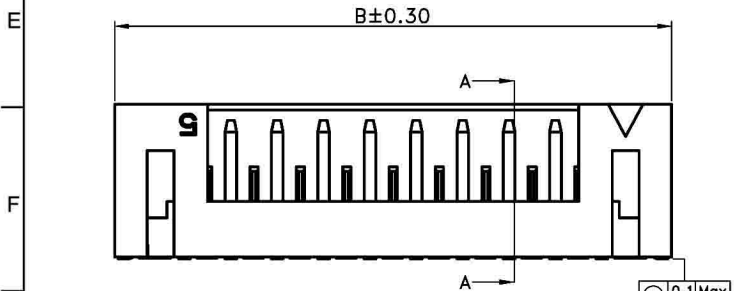
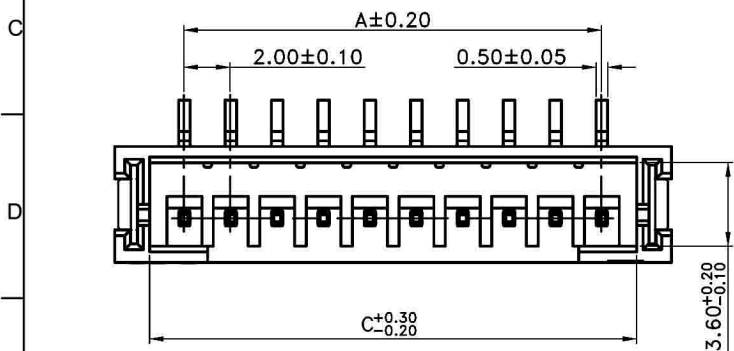
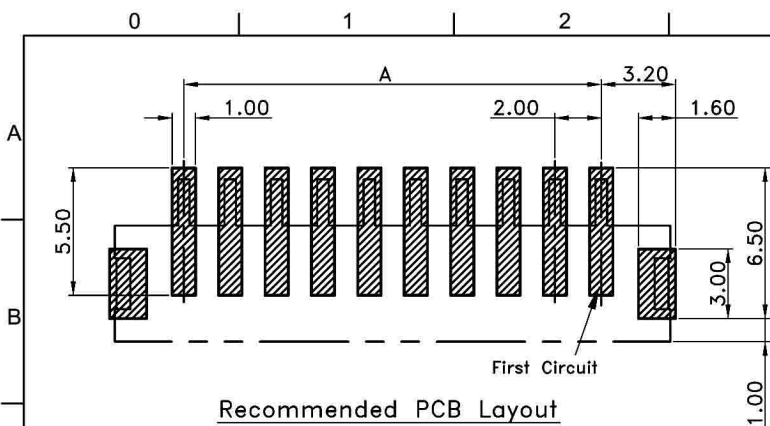


Cap Dimension:

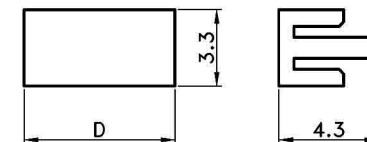

Poles	D
02~03	4.50
04~16	6.50



A-A Section

RoHS COMPLIANT

REV	ECN NO.	DESCRIPTION	DATE
A		RELEASE	AUG. 26'04
B		MODIFY P/N	MAY. 06'11
C		REDRAW	FEB. 26'13
D		ADD. DIM.	APR. 07'16

SPECIFICATIONS

- Rating Voltage : 100V AC/DC
- Current Rating : 2A AC/DC
- Withstanding Voltage : 800V AC/minute
- Insulation Resistance : 1,000MΩ min
- Temperature Range : - 25℃ to + 85℃
- Contact Resistance : 20mΩ max

WAFER

- Material :
 1. Contact : Phos. Bronze
 2. Nail : Brass
 3. Base : Nylon 9T UL94V-0
 4. Cap: Nylon PA46 UL94V-0
- Plated : Tin Plated
- Q' ty : 800 pcs./Reel (With Cap)

Poles	Dimensions(mm)		
	A	B	C
2	2.00	8.00	5.00
3	4.00	10.00	7.00
4	6.00	12.00	9.00
5	8.00	14.00	11.00
6	10.00	16.00	13.00
7	12.00	18.00	15.00
8	14.00	20.00	17.00
9	16.00	22.00	19.00
10	18.00	24.00	21.00
11	20.00	26.00	23.00
12	22.00	28.00	25.00
13	24.00	30.00	27.00
14	26.00	32.00	29.00
15	28.00	34.00	31.00
16	30.00	36.00	33.00

TOLERANCE UNLESS OTHERWISE SPECIFIED

LINEAR	ANGLE
X. ±	X° ±
.X ± 0.30	.X° ±
.XX ± 0.20	.XX° ±
.XXX ±	.XXX° ±
APPD	
CHKD	
DRAW	Z

PROJECTION

UNITS
MM
SCALE
SIZE
A4

GTK GOLD-TEK ELECTRIC CO., LTD.

TITLE	PART NO. 1261**ST	
2.00mm Straight SMT		
Type With Cap		
CPART NO.		
	CAD NO. I056	SHEET
	F:\PDF\HW\HW-A0035	1 OF 1

圖面編號:GTKSD1302-D(1)