


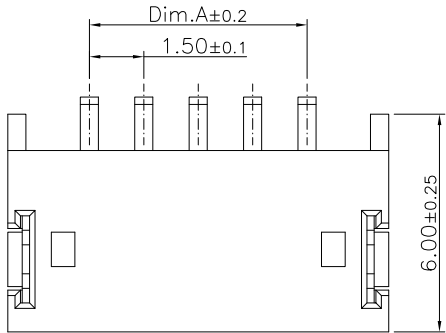




Dimension Information:

Circuits	DIM.A	DIM.B	CIRCUITS	DIM.A	DIM.B	Circuits	DIM.A	DIM.B
2	1.50	6.00	6	7.50	12.00	10	13.50	18.00
3	3.00	7.50	7	9.00	13.50	11	15.00	19.50
4	4.50	9.00	8	10.50	15.00	12	16.50	21.00
5	6.00	10.50	9	12.00	16.50	13	18.00	22.50


Specifications:
Current Rating:1.0A AC/DC
Voltage Rating:50V AC/DC
Contact Resistance:20m Ohm. Max.
Insulation Resistance:500M Ohm. Min.
Withstanding Voltage:500V AC/minute
Operating Temperature Range:−25°C~+85°C

Material and Finish:
Insulatour:High Temp. Plastic (Nylon 6T UL94V-0)
Insulator Color:Ivory
Contact:Brass
Plating:Matte Tin Plated
Packing:1000pcs/Reel


How To Order:
1500R-XX-SM-XX
Blank:Tube
TR:Tape&Reel
SMD Type
No. of Contacts
R:Right Angle

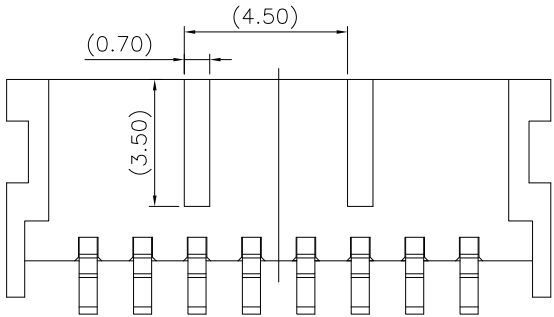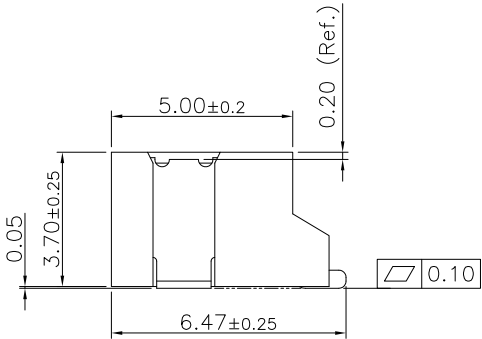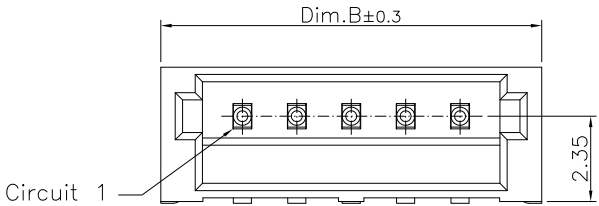

8PIN~13PIN 2條STAND OFF



2PIN~4PIN 無STAND OFF

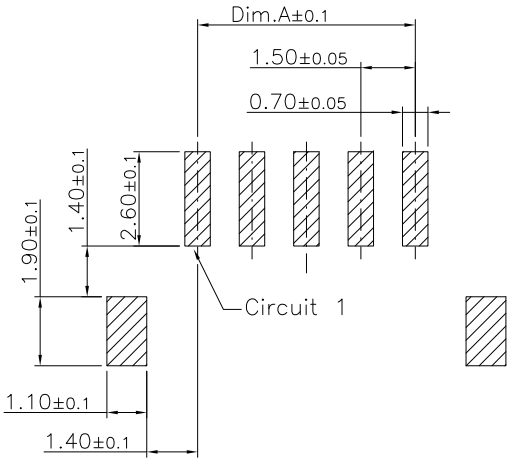

Recommended P.C.B Layout

RoHS Compliant

				DRAWN:	GENERAL TOLERANCE:	 Neltron Industrial Co., Ltd.		D
				Huali	.X=±0.20 .XX=±0.15			
D	08-OCT-2020	Modify Carton Size	Lisy Liu	CHECKED:	UNIT: MM	DESCRIPTION: 1.5mm Wafer R/A SMD Type	SIZE A4	
C	19-Mar-2019		Jamie Wang	Jeremy Liu	SCALE: 1:1			
B	30-Mar-2018	更新圖面	Romina Wu	APPROVAL:	SHEET: 1 / 1	PART NO: 1500R-XX-SM-XX		
A	25-Nov-2008		Huali		PROJECTION: 			
REV	DATE	FILE	BY	Mike Wu				