

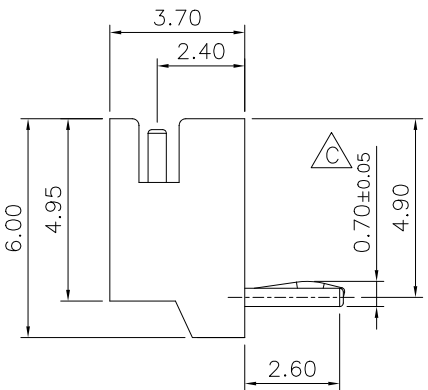
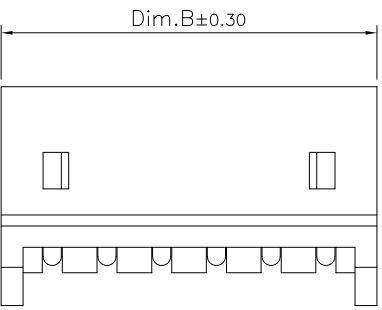


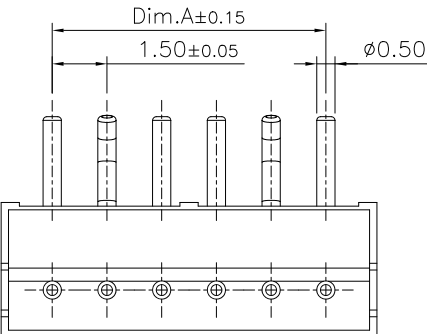

Specifications:
Current Rating: 1.0A AC/DC
Voltage Rating: 50V AC/DC
Contact Resistance: 20m ohm. Max. △B
Insulation Resistance: 500M ohm. Min. △B
Withstanding Voltage: 500V AC/minute
Operating Temperature Range: -25°~+85°C




Material And Finish:
Insulator: 66 or Nylon 9T (UL94V-0) △D
Insulator Color: Beige/Green △F
Terminal: Brass
Finish: Tin Plated

How To Order
△F △D 1500R-XX-XX-XX
Blank Nylon 66
F5:High Temp. Plastic
Blank Beige △F
GN:Green △F
No. of Contacts
Right Angle

Dimension:

Circuits	A	B	Circuits	A	B
2	1.50	4.50	8	10.50	13.50
3	3.00	6.00	9	12.00	15.00
4	4.50	7.50	10	13.50	16.50
5	6.00	9.00	11	15.00	18.00
6	7.50	10.50	12	16.50	19.50
7	9.00	12.00	13	18.00	21.00

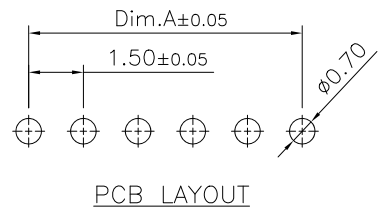

RoHS Compliant

F	20-DEC-2024	Add Green Option	Jamie Chuang	DRAWN: Jamie Wang	GENERAL TOLERANCE: .X=±0.20 .XX=±0.15	 Neltron Industrial Co., Ltd.	
E	22-JUL-2022	Modify 2.3P Packing Q'ty	Lisy Liu				
D	17-APR-2020		Lisy Liu	CHECKED: Jerry Chen	UNIT: MM	DESCRIPTION: 1.5mm Wafer Right Angle Type Packing List	SIZE A4
C	31-OCT-2018	增加尺寸標註	Jamie Wang		SCALE:		
B	28-MAR-2018	修改電氣特性	Jamie Wang	APPROVAL: Mike Wu	SHEET: 1/2	PART NO: 1500R-XX-XX-XX  	
A	11-AUG-2017	(P0001)	Jamie Wang		PROJECTION: 		
REV	DATE	FILE	BY				