

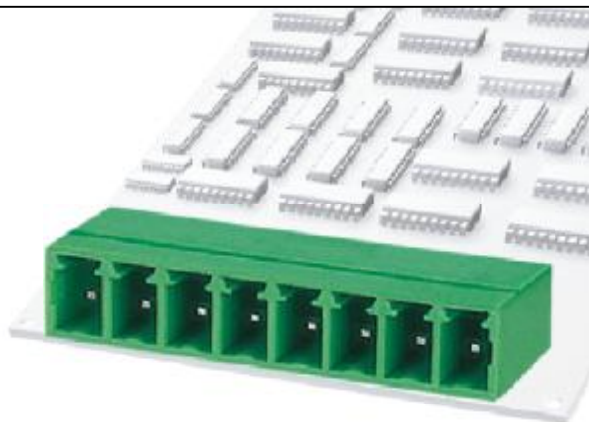




15EDGRC-3.5
15EDGRC-3.81

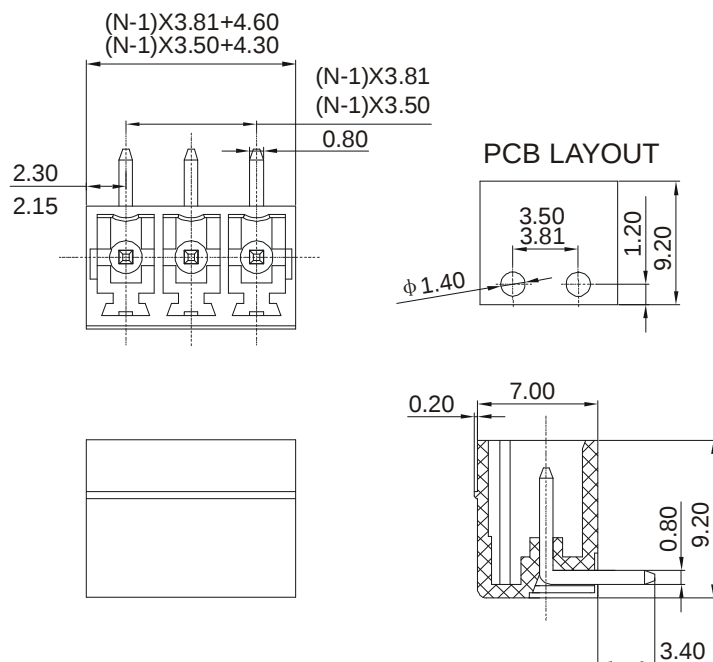

APPROVAL

Electrical

Standard

Rated voltage

Rated current

Rated impulse voltage

Mechanical

Ambient temperature

Dimensions

Pitch

Poles

Material

Housing

Pin header



UL

IEC

300V

250V

8A

7A

2.5KV

-40°C ~ +105 °C


3.5mm(.138") 3.81mm(.150")

2P-24P

PA66,UL94V-0

Brass,Tin-plated

HOW TO ORDER :

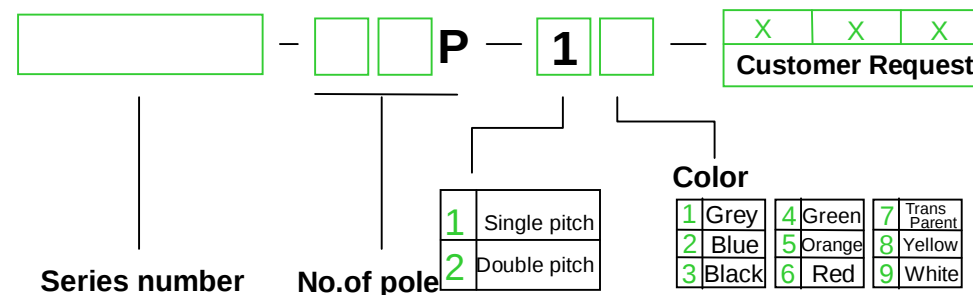

mm (INCH)	DEGSON®	DEGSON ELECTRONICS CO., LTD.
THROANGLE PROJECTION	NAME	15EDGRC-3.5, 15EDGRC-3.81