



#### **Typical Features**

- ◆ Wide input voltage range 85-305VAC/70-430VDC
- ◆ No load power consumption ≤0.3W@220VAC
- ◆ Efficiency up to 78%(Typ.)
- ◆ Operating temperature from -40°C to +85°C
- Switching frequency 65KHz
- ◆ Short circuit protection & over current protection
- ◆ Isolation voltage 3600VAC
- ◆ Compliant with IEC/EN62368/UL62368
- ◆ With UL (E518940) CB & CE certificates
- ◆ Altitude during operation 5000m Max
- ◆ Mini size open-frame, industrial level design
- ◆ PCB SIP mounting



#### **Application Field**

**FG03-C4SXX Series -----** Mini size & open-frame AC-DC power supplies with global adapted input voltage range both AC & DC available, low ripple, low temperature rise, low standby power consumption, high efficiency, high reliability, safety isolated and good EMC performance. This series of products can be widely used in the fields of Electric power, Industry, Instrument and Smart home devices, etc. The additional circuit diagram for EMC is recommended for the application with higher EMC requirement.

Typical Pr	oduct List													
							Max	Ripple &	Efficiency					
		Input	Voltage	Output Specifications			Capacitive	Noise	@full Load					
Certificate	Part No.		1				Load	@20MHz	220VAC					
		Norm.	Range	Power	Voltage	Current	@220VAC	(Max)	(Typ.)					
		(VAC) (VAC)		P(W)	Vo(V)	lo(mA)	uF	mVp-p	%					
CE/CB/UL	FG03-C4S03			2	3.3	600	3000	100	69					
CE/CB/UL	FG03-C4S05				5	600	3000	100	73					
CE/CB/UL	FG03-C4S09	220	220 85-305	05.005	05 205	95 205	95 305	95 305		9	333	330	100	75
CE/CB/UL	FG03-C4S12	220		3	12	250	330	100	75					
CE/CB/UL	FG03-C4S15				15	200	330	100	75					
CE/CB/UL	FG03-C4S24				24	125	330	100	78					

Note 1: The typical value of efficiency is based on the product tested after half an hour burn-in at full load.

Note 2: The full load efficiency should be in ±2% of the typical value in this table. The efficiency is calculated by the way that the full output power is divided by the input power.

Note 3: The Ripple & Noise is tested by the twisted pair method, please refer to the following Ripple & Noise test instruction.

Note 4: Please contact Aipu sales for other output voltages requirement in this series but not listed in this table.





Input Specifications						
Item	Operating Condition	Min	Тур.	Max	Unit	
lament velta de deserva	AC input	85	220	305	VAC	
Input voltage range	DC input	70	310	430	VDC	
Input frequency range	-	47	50	63	Hz	
land	Input 115VAC	-	-	0.10		
Input current	Input 220VAC	-	-	0.07	A	
0 1	Input 115VAC	-	-	22		
Surge current	Input 220VAC	-	-	24		
N. I. I. G.	Input 115VAC	-	0.3		W	
No-load power consumption	Input 220VAC	-				
Leakage current	-	0.5mA TYP/230VAC/50Hz				
Recommended external fuse	-	1A/300VAC Time-delay fuse				
Hot plug		Unavailable				
ON/OFF Control -		Unavailable				

Output S	pecifications					
Item		Operating Condition	Min	Тур.	Max	Unit
Voltage accuracy		Full input voltage range, 10-100% load (the unit can work stably at <10% load)	-	±2.0	±6.0	%
Line	regulation	Rated load	-	±1.0	±2.0	%
Load	d regulation	Nominal input voltage, 20%~100% load	-	±1.0	±3.0	%
Min	imum load	Single Output	10	-	-	%
Turn-on delay time		Input 115VAC (full load)	-	-	1000	mS
		Input 220VAC (full load)	-	-	1000	ms
Dawas	eff hald on time	Input 115VAC (full load)	50	-	-	2
Power-0	off hold up time	Input 220VAC (full load)	80	-	-	mS
Dynamic	Overshoot range	25%~50%~25%	-5.0	-	+5.0	%
Response	Recovery time	50%~75%~50%	-5.0	-	+5.0	mS
Outp	ut overshoot	Full investments on the con-	≤10%Vo			%
Short circuit protection		Full input voltage range	Continuous, self-recovery			Hiccup
Over current protection		Input 220VAC	≥110°	% lo, self-rec	covery	Hiccup
Temp	erature drift	-	-	±0.03%	-	%/℃
Ripp	ole & Noise	-	-	50	100	mV


General Specifications						
Item	Operating Condition	Min	Тур.	Max	Unit	
Switching frequency	-	-	65	-	KHz	
Operating temperature	Refer to the Temperature Derating Graph	-40	-	+85	•	
Storage temperature	-	-40	-	+110	C	





Caldarina taman anatura	Wave soldering			260±4℃, time 5-10S					
Soldering temperature		Manual	soldering		360±8℃, time 4-7S				
Relative humidity			-		10	-		90	%RH
Isolation voltage	I/P-O/P	Test 1min,	leakage current ≤	ōmΑ	3600	-		-	VAC
Insulation resistance	I/P-O/P	P @ DC500V			100	-		-	ΜΩ
MTBF	ı	MIL-HDBK-2	217F @25℃		1000	-		-	K Hours
Safety standard			-		IEC/EN62368/UL62368				
Vibration			-		10-55Hz,10G, 30 Min, along X,Y,Z				Y,Z
Safety class	-				CLASS II				
Maint & Dimensions	Part	Part No. Weight (Typ.)			Dimensions L x W x H				
Weight & Dimensions	FG03-0	C4SXX	4g	26.4	10 x 15.40 x	11.00 mm	1.0	)39 × 0.606 ×	0.433 inch

EMC Pe	erformanc	es		
Tota	l Item	Sub Item	Test Standard	Performance/Class
	- FN41	CE	CISPR32/EN55032	CLASS B (with the Recommended Circuit 2-3)
	EMI RE		CISPR32/EN55032	CLASS B (with the Recommended Circuit 2-3)
		RS	IEC/EN61000-4-3	10V/m Perf.Criteria B (with the Recommended Circuit 2-3)
	CS		IEC/EN61000-4-6	3Vr.m.s Perf.Criteria B (with the Recommended Circuit 2-3)
EMC		ESD	IEC/EN61000-4-2	Contact ±6KV / Air ±8KV Perf.Criteria B (with the Recommended Circuit 2-3)
	EMS Surge EFT		IEC/EN61000-4-5	Line to line ±2KV Perf.Criteria B (with the Recommended Circuit 2-3)
			IEC/EN61000-4-4	±4KV Perf.Criteria B (with the Recommended Circuit 2-3)
		Voltage dips & interruptions	IEC/EN61000-4-11	0%~70% Perf.Criteria B

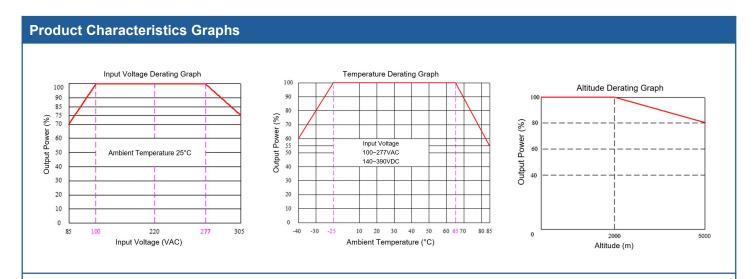

Note 1: The output power should be derated based on the input voltage derating graph at 85~100VAC/70~140VDC & 277~305VAC/390~430VDC.

Note 2: This product should operate at the natural air condition, please contact us if it need be used at a closed space.





### **Recommended Circuits Diagrams for Application**

#### 1. Typical application circuit diagram

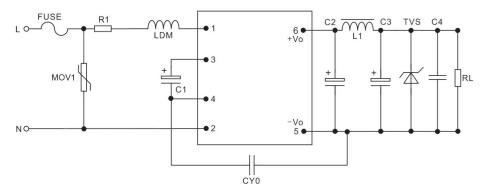


Figure - Circuit 1

Part No.	C2(*) Solid-state capacitor	L1 (*)	C3(*) Solid-state capacitor	C4	LDM	R1(*)	CY0	FUSE (*)	TVS
FG03-C4S03	220uF/10V		220uF/10V					4.0.7	SMBJ7.0A
FG03-C4S05	220uF/10V		220uF/10V			400/014	Y1	1A/	SMBJ7.0A
FG03-C4S09	220uF/16V	2.0uH/1A	68uF/16V	0.1uF/50V	1.2mH	12Ω/3W Wire-wound	/102M	300VAC Time	SMBJ12A
FG03-C4S12	220uF/16V	2.0un/1A	68uF/16V	0.1uF/50V	/0.2A	resistor	/400V	delay	SMBJ20A
FG03-C4S15	220uF/35V		68uF/35V			16313101	AC	fuse	SMBJ20A
FG03-C4S24	68uF/35V		47uF/35V					iuse	SMBJ30A

C1(*)	Conditions		
1005/4507	Input 85-305VAC, -25°C ~ +85°C		
10uF/450V	Input 165-305VAC, -40°C ~ +85°C		
22uF/450V	Input 85-305VAC, -40°C ~ +85°C		

#### Note:

- 1) The \* marked components are necessary for the application, not optional.
- 2) The Ripple current >200mA@100KHz electrolytic capacitor is recommended for C1 which works as the input filter capacitor at AC input and the EMC filter capacitor at DC input.
- 3) 14D561K/4500A is recommended for MOV1.

### 2. Recommended circuit diagrams for higher EMC requirements

#### **Basic application**

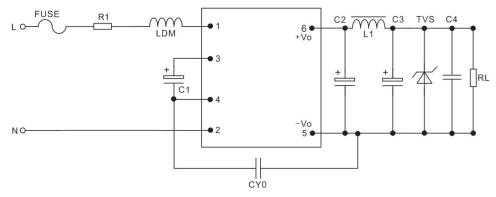


Figure - Circuit 2-1





Application Environment	Ambient Temperature	EMS Level	EMI Class
Basic Application	-40℃ ~ +85℃	3	Class A

Component	Recommend Value		
FUSE(Necessary)	1A/300VAC, Time-delay fuse		
R1 (Wire-wound resistor, necessary)	12Ω/3W		
LDM	1.2mH/0.2A		

Note: Wire-wound resistor is recommended for R1 as the input plug-in resistor, SMD resistor or a carbon film resistor is not available for the application.

#### Recommended circuit diagram for indoor household normal environment

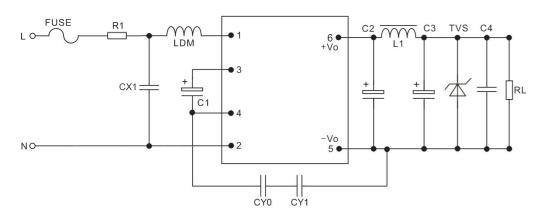


Figure - Circuit 2-2

Application Environment	Ambient Temperature	EMS Level	EMI Class
Indoor household Normal	-25℃ ~ +55℃	3	Class B

Component	Recommended Value		
FUSE (Necessary)	1A/300VAC, Time-delay fuse		
R1 (Wire-wound resistor, necessary)	12Ω/3W		
CX1	X2/104K/310VAC		
LDM	1.2mH/0.2A		

Note 1: 2x Y capacitors (CY0 & CY1, Y1/222M/400VAC) are recommended for household application which is compliant with IEC/EN60335

Note 2: A bleeder resistor( $<3.8M\Omega$ ) is recommended to connect in parallel with X capacitor to meet certificate requirement, the resistance value can be defined according to the actual test situation.

Note 3: Wire-wound resistor is recommended for R1 as the input plug-in resistor, SMD resistor or a carbon film resistor is not available for the application.



### Recommended circuit diagram for indoor industrial environment

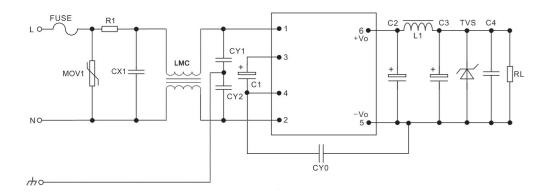


Figure - Circuit 2-3

Application Environment	Application Environment Ambient Temperature		EMI Class	
Indoor Industry	Indoor Industry -25°C ~ +55°C		Class B	

Component	Recommended Value	
FUSE (Necessary)	1A/300VAC, Time-delay fuse	
MOV1	14D561K/4500A	
R1 (Wire-wound resistor, necessary)	12Ω/3W	
CX1	X2/104K/310VAC	
LMC	30mH/0.3A	
CY1, CY2	Y1/102M/400VAC	

Note 1: A bleeder resistor( $<3.8M\Omega$ ) is recommended to connect in parallel with X capacitor to meet certificate requirement, the resistance value can be defined according to the actual test situation.

Note 2: Wire-wound resistor is recommended for R1 as the input plug-in resistor, SMD resistor or a carbon film resistor is not available for the application.

#### Recommended circuit diagram for outdoor normal environment

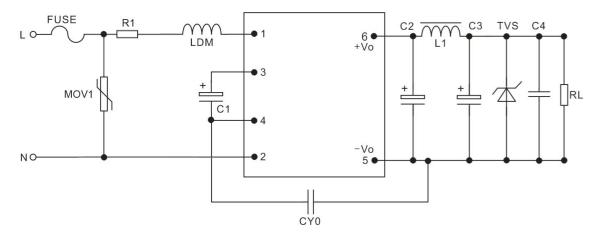


Figure - Circuit 2-4






Application Environment Ambient Temperature		EMS Level	EMI Class	
Outdoor normal	-40℃ ~ +85℃	4	Class A	


Component	Recommended Value	
FUSE (Necessary)	1A/300VAC, Time-delay fuse	
MOV1	14D561K/4500A	
R1 (Wire-wound resistor, necessary)	12Ω/3W	
LDM	1.2mH/0.2A	

Note: Wire-wound resistor is recommended for R1 as the input plug-in resistor, SMD resistor or a carbon film resistor is not available for the application.

### Ripple & Noise Test Instruction (Twisted Pair Method, 20MHZ bandwidth)

- 1. The Ripple & noise test need 12# twisted pair cables, an oscilloscope which bandwidth should be set at 20MHz, 0.1uF polypropylene capacitor and 10uF high-frequency low-resistance electrolytic capacitors are connected in parallel with the probes (100M bandwidth). The oscilloscope should be set at the Sample Mode.
- 2. The test diagram is shown on the right. The converter output connects to the electronic load by the jig with cables which size should be defined according to the output current value. The twisted pair (length 30cm±2 cm) should be connected in parallel with the load, the location is as close as possible to the output pins or terminals. The test can be start after input power on.

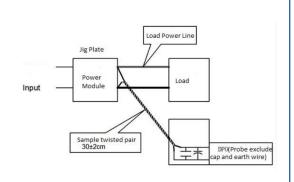

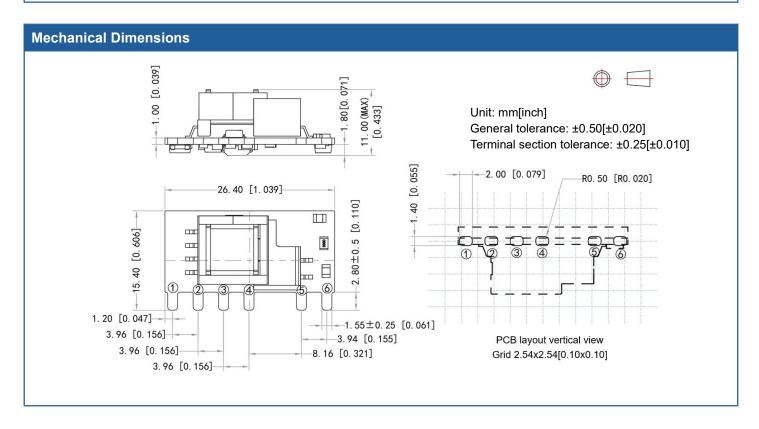





Pin-out Function Description						
Pin No.	1	2	3	4	5	6
Function	AC(L)	AC(N)	+Vcap	-Vcap	-Vo	+Vo

#### **Application Notice**

- 1. The products should be used according to the specifications on this datasheet, otherwise it could be permanently damaged.
- 2. A fuse should be connected at input.
- 3. The product performance on this datasheet cannot be guaranteed if it works at a lower load than the minimum load defined.
- 4. The product performance on this datasheet cannot be guaranteed if it works at over-load condition.
- 5. Unless otherwise specified, all values or indicators on this datasheet are tested at Ta=25°C, humidity<75%RH, nominal input voltage and rated load (pure resistance load).
- 6. All values or indicators on this datasheet had been tested based on Aipupower test specifications.
- 7. The specifications are specially for the parts listed on this datasheet, any other non-standard model performances could be out of the specifications. Please contact our technician for specific requirements.
- 8. Aipupower can provide customization service.

### Guangzhou Aipu Electron Technology Co., Ltd

Address: Building 4, HEDY Park, No.63, Punan Road, Huangpu Dist, Guangzhou, China.

Tel: 86-20-84206763 Fax: 86-20-84206762 HOTLINE: 400-889-8821 E-mail: sales@aipu-elec.com Website: https://www.aipupower.com