


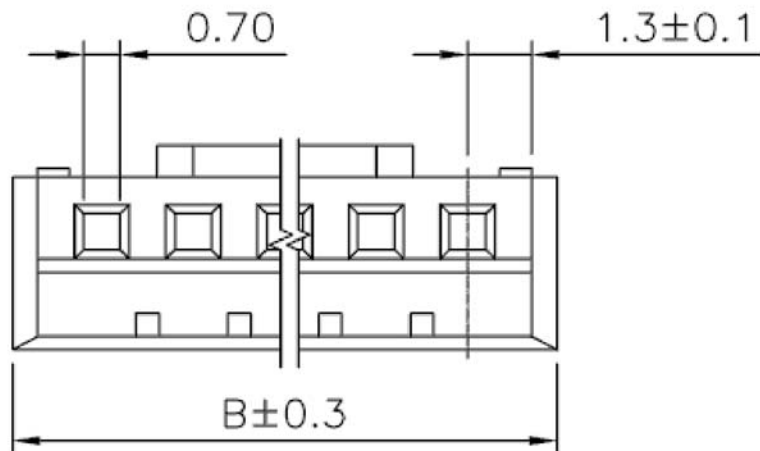



■ SPECIFICATIONS

- Voltage Rating : 100V AC/DC
- Current Rating : 2A AC/DC
- Withstanding Voltage : 800V AC/minute
- Insulation Resistance : 1,000M Ω min
- Temperature range : - 25°C to + 85°C
- Contact resistance : 20m Ω max

■ HOUSING

- Poles : 2-16
- Material : Nylon 66 UL94V-0
- Q' ty : 1,000 pcs/Bag

Poles	Part No.	Dimensions(mm)		
		A	B	C
2	20-02HA	2.00	5.80	4.60
3	20-03HA	4.00	7.80	6.60
4	20-04HA	6.00	9.80	8.60
5	20-05HA	8.00	11.80	10.60
6	20-06HA	10.00	13.80	12.60
7	20-07HA	12.00	15.80	14.60
8	20-08HA	14.00	17.80	16.60
9	20-09HA	16.00	19.80	18.60
10	20-10HA	18.00	21.80	20.60
11	20-11HA	20.00	23.80	22.60
12	20-12HA	22.00	25.80	24.60
13	20-13HA	24.00	27.80	26.60
14	20-14HA	26.00	29.80	28.60
15	20-15HA	28.00	31.80	30.60
16	20-16HA	30.00	33.80	32.60

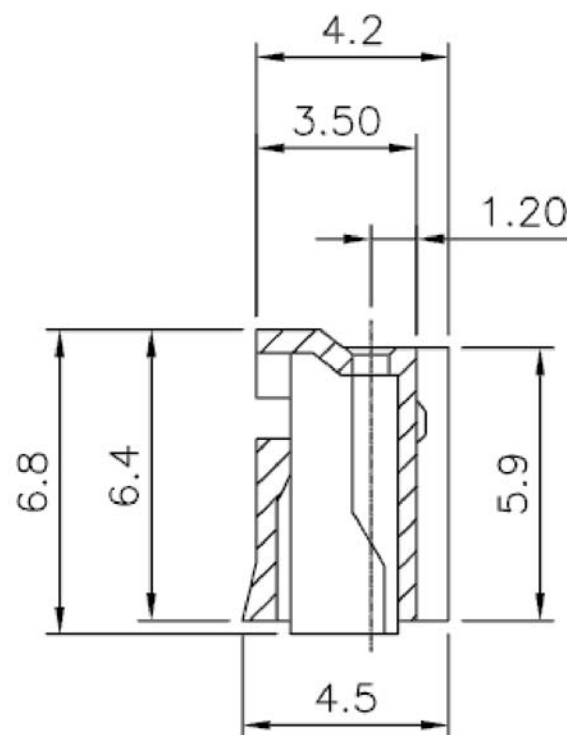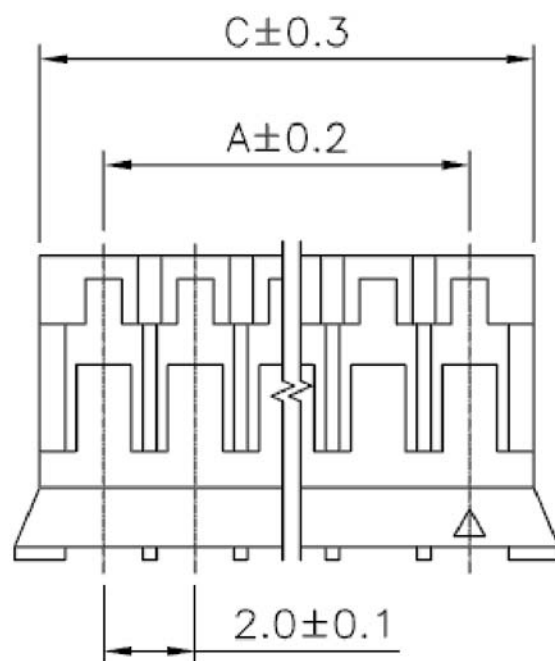

REV.	REVISION RECORD	DATE	General Tolerances			ARIBA TECHNOLOGY CO., LTD			
	Original	10/18/04'	LINEAR 0.0 ±0.35 0.00±0.20 ANGLES ±3°						
					UNIT:mm(in)	TITLE: 2.00mm Housing			
			A4	NAME	DATE				
			APPROVED	MARTIN		DWG.NO.: 20—xxHA REV. A			
			DESIGNER	MERLIN					
			DRAWN	ANGEL		SCALE	1 : 1	SHEET	1 OF 1