





REV	ECN NO.	DESCRIPTION	DATE
A		RELEASE	OCT. 22'03
B		ADD. RoHS	SEP. 09'09
C		MODIFY P/N	MAY. 09'11

- Voltage Rating : 250V AC/DC
- Current Rating : 3A AC/DC
- Withstanding Voltage : 1,000V AC/minute
- Insulation Resistance : 1,000M Ω min
- Temperature Range : - 25°C to + 85°C
- Contact Resistance : 20m Ω max.

- Poles : 2 - 20
- Material : Base : Nylon 66 UL94V-0
- Q' ty : 1000 pcs./Bag

Poles	Dimensions (mm)		
	A	B	C
2	2.50	5.70	7.30
3	5.00	8.20	9.80
4	7.50	10.70	12.30
5	10.00	13.20	14.80
6	12.50	15.70	17.30
7	15.00	18.20	19.80
8	17.50	20.70	22.30
9	20.00	23.20	24.80
10	22.50	25.70	27.30
11	25.00	28.20	29.80
12	27.50	30.70	32.30
13	30.00	33.20	34.80
14	32.50	35.70	37.30
15	35.00	38.20	39.80
16	37.50	40.70	42.30
17	40.00	43.20	44.80
18	42.50	45.70	47.30
19	45.00	48.20	49.80
20	47.50	50.70	52.30

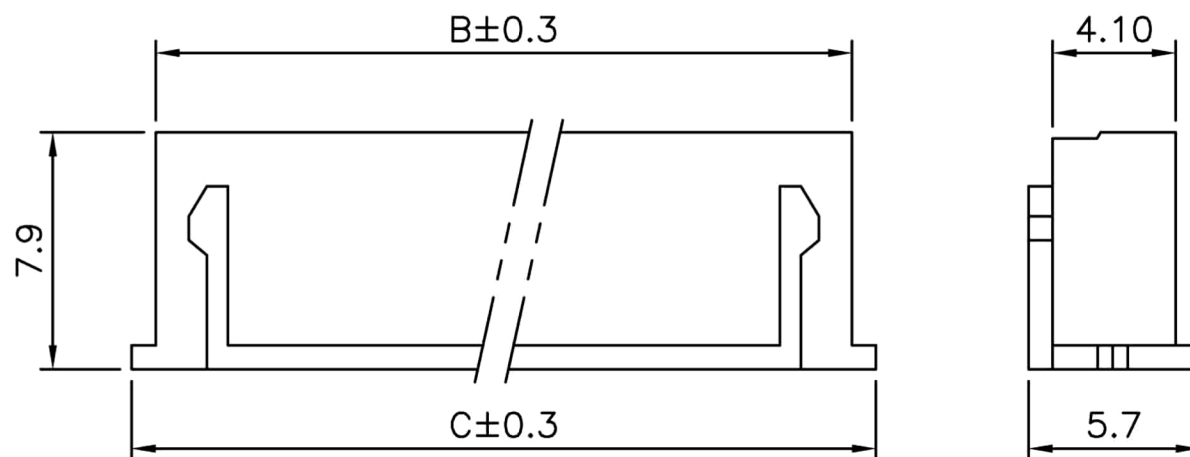

TOLERANCE UNLESS OTHERWISE SPECIFIED			PROJECTION 	 GOLD-TEK ELECTRIC CO., LTD.		
LINEAR		ANGLE	UNITS MM	TITLE 2.50mm Housing	PART NO. 2001**	
X. ±	X° ±	CAD NO. F:\PDF\HW\HW-0034			SHEET 1 OF 1	
.X ± 0.30	.X° ±					
.XX ± 0.20	.XX° ±					
.XXX± 0.10	.XXX° ±					
APPD		SCALE	CPART NO.	圖面編號:GTKSD1184-C(1)		
CHKD		SIZE				
DRAW	Z	A4				
MAY.09'2011						