


Single Row - Right Angle Type

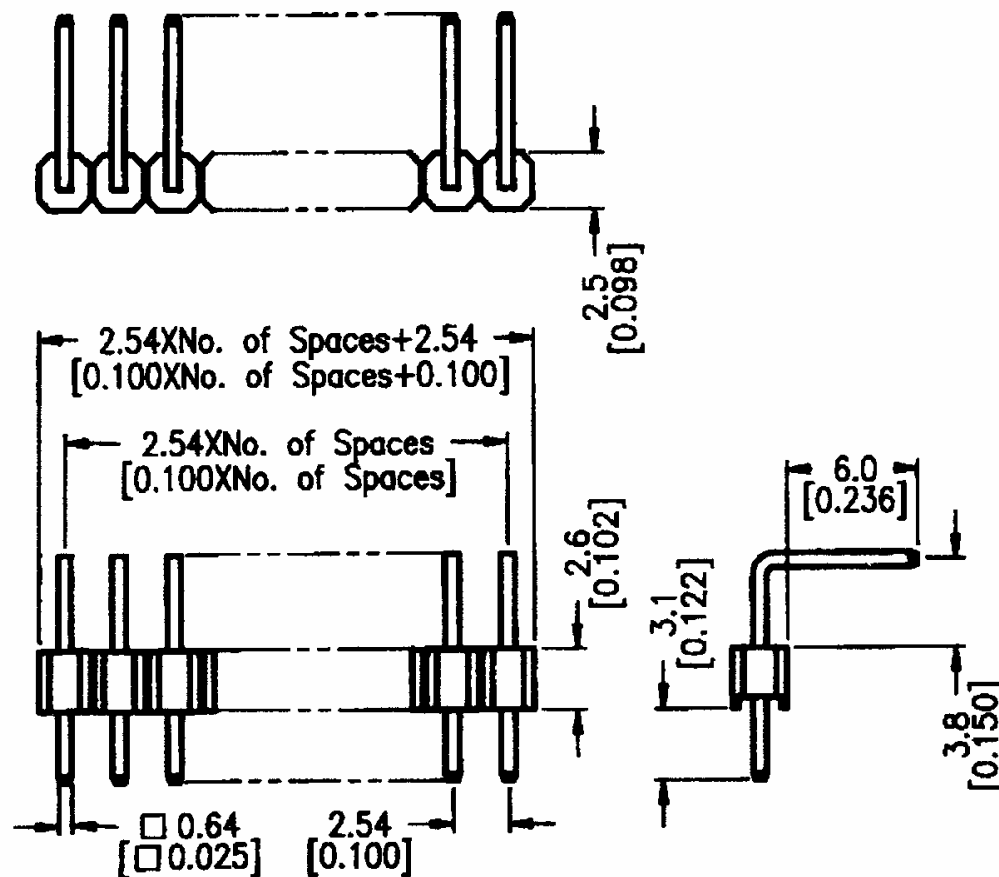

Material

Insulator : 30% Glass Fiber PBT

Contact : Brass

* RoHS Compliance

Specification

Current Rating : 3 Amp


Insulation Resistance : 5,000 Mohm min. at DC 500V

Contact Resistance : 20 mohm max. at DC 100mA

Dielectric Voltage : AC 500V for 1 minute

Operation Temperature : - 40°C ~ + 105°C

P.C. Board Layout (Single Row)

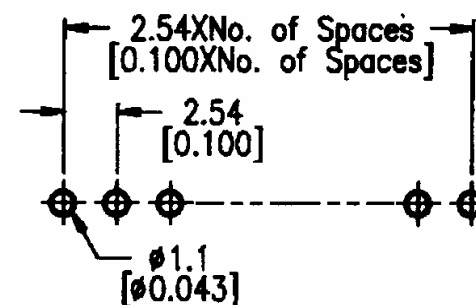

E				DRAWN:	GENERAL TOLERANCE:			Ho Swong Electronic Co., Ltd.	
D				Jack	.0	.00	.000		
C				CHECKED:	+/-0.20	+/-0.15	+/-0.05	DESCRIPTION:	SIZE
B				Ivy	UNIT : MM			2.54mm Pin Header Strip, R/A, Single Row (3.8mm)	A4
A				APPROVAL:	SCALE :			PART NO:	
REV	DATE	FILE	BY	Simon	SHEET : 1 / 1			201R - 1 x 40G/RH-3.8	