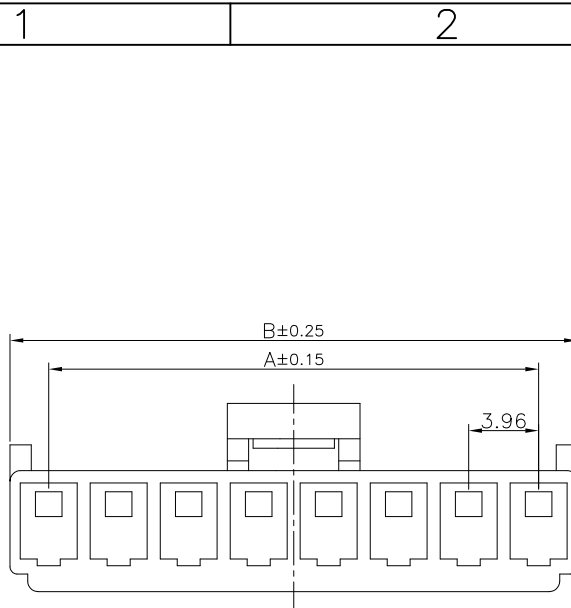


Specifications:

Current Rating:7.0 AC/DC
Voltage Rating:250V AC/DC
Contact Resistance:10m ohm. max.
Insulation Resistance:1,000M ohm.min.
Withstanding Voltage:1,500V AC/minute
Operating Temperature Range:-40°C to +105°C
Application Wires:AWG #22 to #18

Material and Finish

Insulator:Nylon 66 (UL94V-0)
Insulator Color:White
Terminal:Brass
Finish:Tin Plated


How To Order

2114H-XX

No. of Contacts
Housing

Circuits	DIM:(mm)		Circuits	DIM:(mm)	
	A	B		A	B
2	3.96	8.04	9	31.68	35.88
3	7.92	12.10	10	35.64	39.84
4	11.88	15.96	11	39.60	43.74
5	15.84	20.00	12	43.56	47.74
6	19.80	23.90	13	47.52	51.70
7	23.76	27.90	14	51.48	55.66
8	27.72	31.86			

RoHS Compliant

				DRAWN:	GENERAL TOLERANCE:	 Neltron Industrial Co., Ltd.		D
E				Allen	.X=±0.2 .XX=±0.15			
D				CHECKED:		DESCRIPTION: 3.96mm Wire To Board Housing		
C				Jerry Chen	UNIT: MM SCALE:			
B				APPROVAL:	SHEET: 1 / 1	PART NO: 2114H-XX		
A	23-SEP-2009	(P0257)	Allen	Mike Wu	PROJECTION: 			
REV	DATE	FILE	BY					