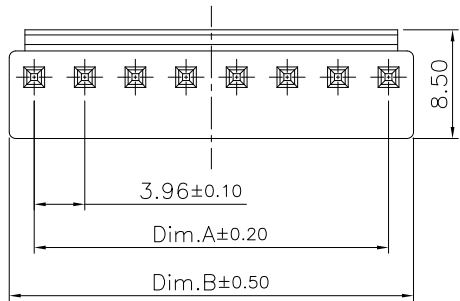



Specifications:
 Current Rating:7.0A AC,DC
 Voltage Rating:250V AC,DC
 Contact Resistance:10mohm Max
 Insulation Resistance:1000Mohm Min.
 Withstanding Voltage:1500V AC/minute
 Operating Temperature Range:−40°C~+105°C

Material and Finish:
 Insulator:Nylon 66 (UL94V−0)
 Contact:Brass
 Plating:Tin Plated

How to Order
 2114S−XX−XX
 Blank:White BK:Black RD:Red
 BU:Blue OR:Orange GN:Green
 YL:Yellow PK:Pink GR:Gray
 No. Of Contacts
 Straight Type

Dimension:

Pos.	Dimension:		Pos.	Dimension:		Pos.	Dimension:	
	A	B		A	B		A	B
02	3.96	7.86	09	31.68	35.58	16	59.40	63.30
03	7.92	11.82	10	35.64	39.54	17	63.36	67.26
04	11.88	15.78	11	39.60	43.50	18	67.32	71.22
05	15.84	19.74	12	43.56	47.46	19	71.28	75.18
06	19.80	23.70	13	47.52	51.42	20	75.24	79.14
07	23.76	27.66	14	51.48	55.38			
08	27.72	31.62	15	55.44	59.34			

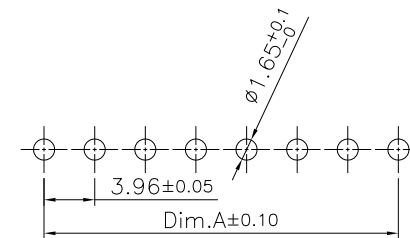

P.C.B Layout

RoHS Compliant

F				DRAWN: Jeremy Liu	GENERAL TOLERANCE: .X=±0.20 .XX=±0.15	 Neltron Industrial Co., Ltd.		D
E								
D								
C				CHECKED: Jeremy Liu	UNIT: MM	DESCRIPTION: 3.96mm Wire to Board Wafer Straight Type	SIZE A4	
B					SCALE: 1:1			
A	16-JAN-2011	(P0001)	Jeremy Liu	APPROVAL: Mike Wu	SHEET: 1/1	PART NO: 2114S-XX-XX		
REV	DATE	FILE	BY		PROJECTION: 