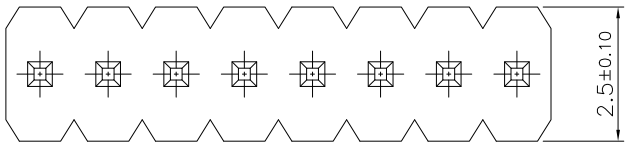

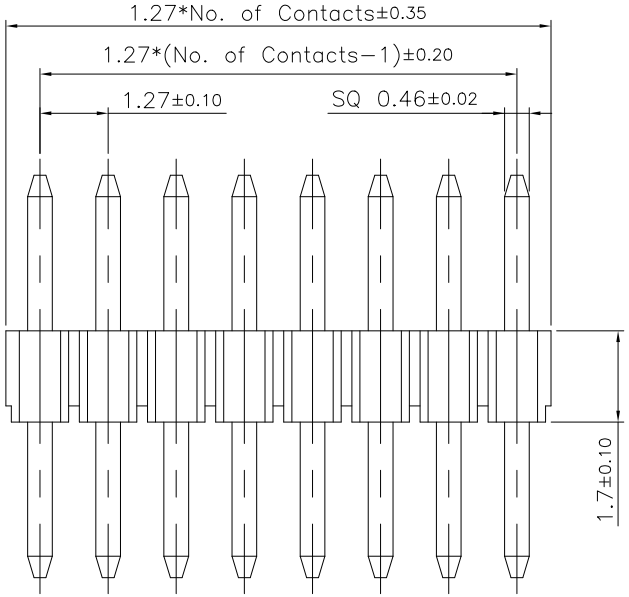

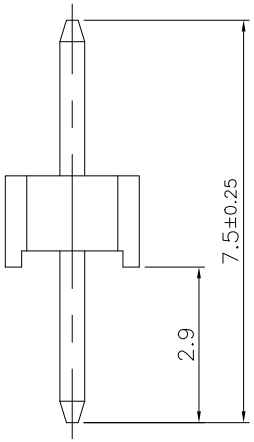

Specifications:
Current Rating: 1.0A AC/DC
Voltage Rating: 100V AC/DC
Contact Resistance: 20m ohm Max.
Insulation Resistance: 1000M ohm Min.
Withstanding Voltage: 500V AC/Minute
Operating Temperature Range: −40°C ~ +105°C

Materials and Finish:
Insulator: High Temperature Plastic (UL94V−0)
Insulator Color: Black
Contact: Copper Alloy
Plated: Gold/Matte Tin Plated

How To Order
2206PA−XXX−002

- G:Gold Plated
- MT:Matte Tin Plated
- No. of Contacts
- Single Row

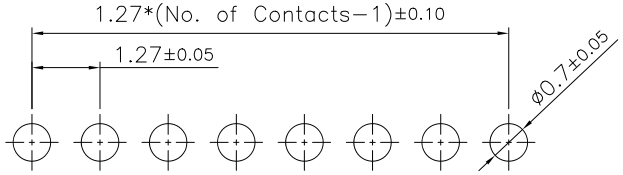

P.C.B. Layout

RoHS Compliant

REV	DATE	FILE	BY
F			
E			
D			
C			
B			
A	13−JUN−2025	(PC0643)(J0169)	Brian Hsu

DRAWN: Brian Hsu
CHECKED: Jerry Chen
APPROVAL: Rory Chen

GENERAL TOLERANCE:
.X=±0.20
.XX=±0.15

UNIT: MM
SCALE: 1:1
SHEET: 1/1
PROJECTION:

Neltron Connectors **Neltron Industrial Co., Ltd.**

DESCRIPTION: 1.27mm Pin Header Single Row

PART NO: 2206PA−XXX−002

SIZE **A4**