


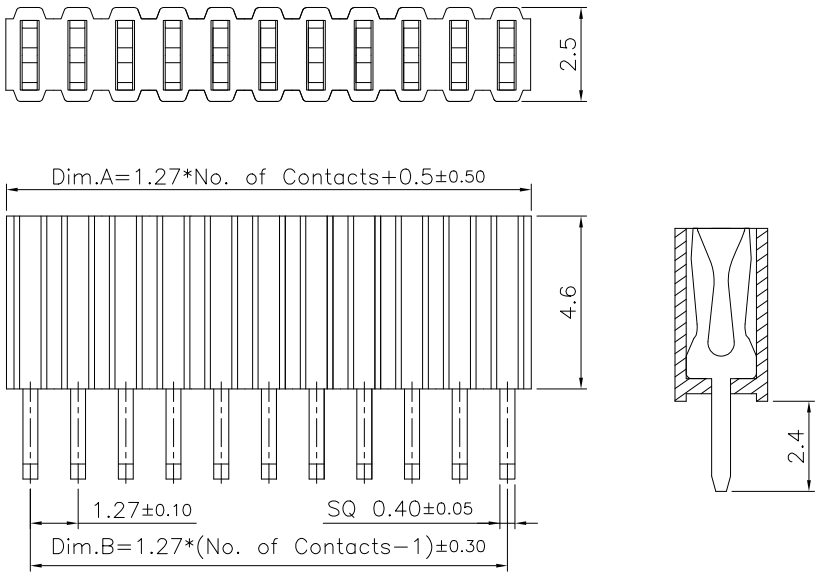


Specifications:
Current Rating: 1.0A AC/DC
Voltage Rating: 100V AC/DC
Contact Resistance: 20m ohm Max.
Insulation Resistance: 1000M ohm Min.
Withstanding Voltage: 500V AC/Minute
Operating Temperature Range: -40°C ~ +105°C

Materials and Finish:
Insulator: High Temperature Plastic (UL94V-0)
Insulator Color: Black
Contact: Copper Alloy
Plated: Gold Plated

How To Order
2206SA-XX-46
Insulator Height 4.6mm
No. of Contacts
Straight Single Row

Pin	DIM:(mm)		Pin	DIM:(mm)		Pin	DIM:(mm)		Pin	DIM:(mm)	
	A	B		A	B		A	B		A	B
2	3.04	1.27	15	19.55	17.78	28	36.06	34.29	41	52.57	50.80
3	4.31	2.54	16	20.82	19.05	29	37.33	35.56	42	53.84	52.07
4	5.58	3.81	17	22.09	20.32	30	38.60	36.83	43	55.11	53.34
5	6.85	5.08	18	23.36	21.59	31	39.87	38.10	44	56.38	54.61
6	8.12	6.35	19	24.63	22.86	32	41.14	39.37	45	57.65	55.88
7	9.39	7.62	20	25.90	24.13	33	42.41	40.64	46	58.92	57.15
8	10.16	8.89	21	27.17	25.40	34	43.68	41.91	47	60.19	58.42
9	11.43	10.16	22	28.44	26.67	35	44.95	43.18	48	61.46	59.69
10	13.20	11.43	23	29.71	27.94	36	46.22	44.45	49	62.73	60.96
11	14.47	12.70	24	30.98	29.21	37	47.49	45.72	50	64.00	62.23
12	15.74	13.97	25	32.25	30.48	38	48.76	46.99			
13	20.01	15.24	26	33.52	31.75	39	50.05	48.26			
14	18.28	16.51	27	34.79	33.02	40	51.30	49.53			

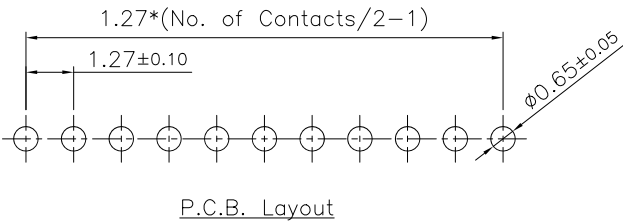

RoHS Compliant

F				DRAWN: Brian Hsu	GENERAL TOLERANCE: .X=±0.20 .XX=±0.15	 Neltron Industrial Co., Ltd.	
E							
D				CHECKED: Jerry Chen	UNIT: MM	DESCRIPTION: 1.27mm PCB Socket 4.6mm Height	SIZE A4
C					SCALE:		
B				APPROVAL: Rory Chen	SHEET: 1/1	PART NO: 2206SA-XX-46	
A	13-JUN-2025	(PC0341)(J0169)	Brian Hsu		PROJECTION: 		
REV	DATE	FILE	BY				