

PC817 Series

High Density Mounting Type Photocoupler

※ Lead forming type (I type) and taping reel type (P type) are also available. (PC817I/PC817P) (Page 656)
 ※TUV (VDE0884) approved type is also available as an option.

■ Features

1. Current transfer ratio
(CTR : MIN. 50% at $I_F = 5\text{mA}$)
2. High isolation voltage between input and output ($V_{\text{iso}} : 5\,000\text{V}_{\text{rms}}$)
3. Compact dual-in-line package

PC817 : 1-channel type

PC827 : 2-channel type

PC837 : 3-channel type

PC847 : 4-channel type


4. Recognized by UL, file No. E64380

■ Applications

1. Computer terminals
2. System appliances, measuring instruments
3. Registers, copiers, automatic vending machines
4. Electric home appliances, such as fan heaters, etc.
5. Medical instruments, physical and chemical equipment
6. Signal transmission between circuits of different potentials and impedances

■ Outline Dimensions

(Unit : mm)

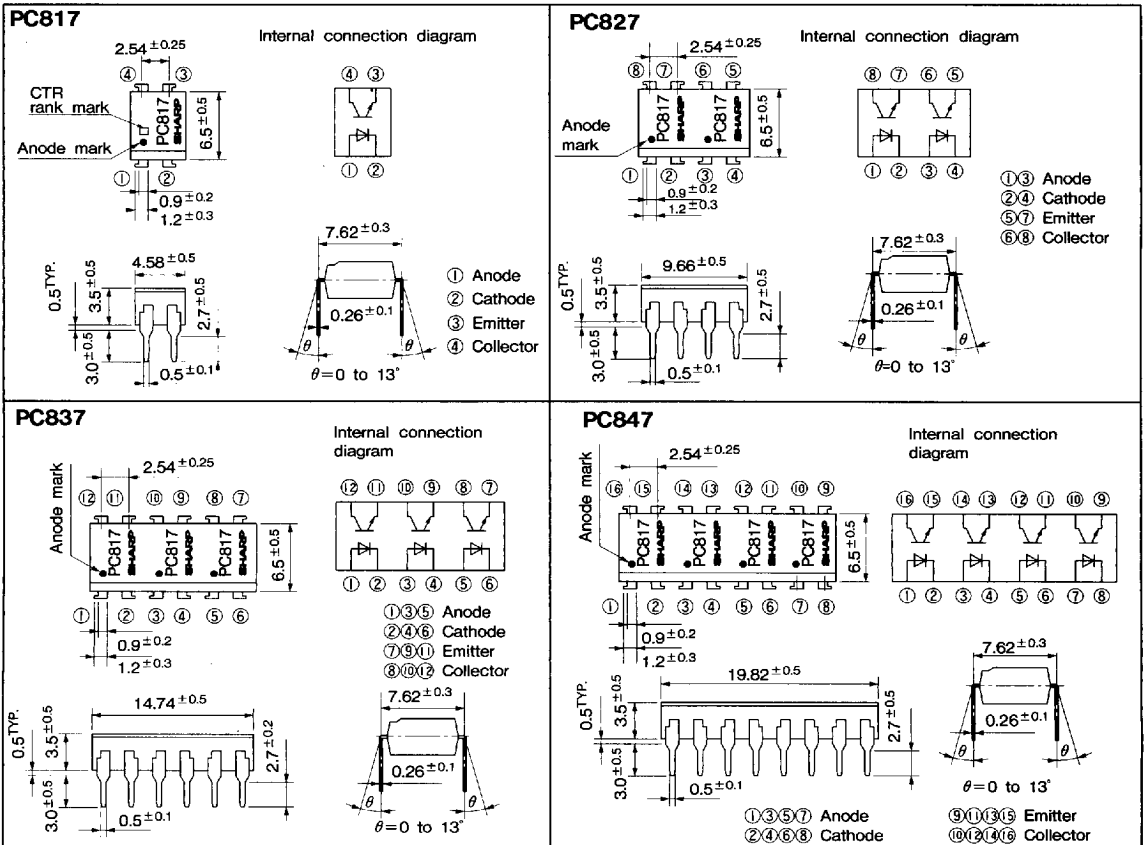

8180798 0011741 0T5

"In the absence of confirmation by device specification sheets, SHARP takes no responsibility for any defects that occur in equipment using any of SHARP's devices, shown in catalogs, data books, etc. Contact SHARP in order to obtain the latest version of the device specification sheets before using any SHARP's device."

437

Absolute Maximum Ratings

(Ta = 25°C)

Parameter		Symbol	Rating	Unit
Input	Forward current	I_F	50	mA
	*1 Peak forward current	I_{FM}	1	A
	Reverse voltage	V_R	6	V
	Power dissipation	P	70	mW
Output	Collector-emitter voltage	V_{CEO}	35	V
	Emitter-collector voltage	V_{ECO}	6	V
	Collector current	I_C	50	mA
	Collector power dissipation	P_C	150	mW
Total power dissipation		P_{tot}	200	mW
*2 Isolation voltage		V_{iso}	5 000	V_{rms}
Operating temperature		T_{opr}	-30 to +100	°C
Storage temperature		T_{stg}	-55 to +125	°C
*3 Soldering temperature		T_{sol}	260	°C

*1 Pulse width $\leq 100 \mu s$, Duty ratio = 0.001

*2 40 to 60%RH, AC for 1 minute

*3 For 10 seconds


Electro-optical Characteristics

(Ta = 25°C)

Parameter		Symbol	Conditions	MIN.	TYP.	MAX.	Unit
Input	Forward voltage	V_F	$I_F = 20mA$	—	1.2	1.4	V
	Peak forward voltage	V_{FM}	$I_{FM} = 0.5A$	—	—	3.0	V
	Reverse current	I_R	$V_R = 4V$	—	—	10	μA
	Terminal capacitance	C_t	$V = 0, f = 1kHz$	—	30	250	pF
Output	Collector dark current	I_{CEO}	$V_{CE} = 20V$	—	—	10^{-7}	A
Transfer characteristics	*4 Current transfer ratio	CTR	$I_F = 5mA, V_{CE} = 5V$	50	—	600	%
	Collector-emitter saturation voltage	$V_{CE(sat)}$	$I_F = 20mA, I_C = 1mA$	—	0.1	0.2	V
	Isolation resistance	R_{iso}	DC500V, 40 to 60%RH	5×10^{10}	10^{11}	—	Ω
	Floating capacitance	C_f	$V = 0, f = 1MHz$	—	0.6	1.0	pF
	Cut-off frequency	f_c	$V_{CE} = 5V, I_C = 2mA, R_L = 100\Omega, -3dB$	—	80	—	kHz
	Response time	Rise time Fall time	t_r t_f	$V_{CE} = 2V, I_C = 2mA, R_L = 100\Omega$	4 3	18 18	μs μs

*4 Classification table of current transfer ratio is shown below.

Fig. 1 Forward Current vs. Ambient Temperature

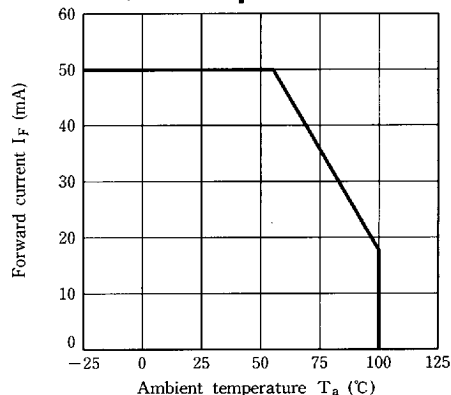

Model No.	Rank mark	CTR (%)
PC817A	A	80 to 160
PC817B	B	130 to 260
PC817C	C	200 to 400
PC817D	D	300 to 600
PC8*7AB	A or B	80 to 260
PC8*7BC	B or C	130 to 400
PC8*7CD	C or D	200 to 600
PC8*7AC	A, B or C	80 to 400
PC8*7BD	B, C or D	130 to 600
PC8*7AD	A, B, C or D	80 to 600
PC8*7	A, B, C, D or No mark	50 to 600

* : 1 or 2 or 3 or 4

Fig. 2 Collector Power Dissipation VS. Ambient Temperature

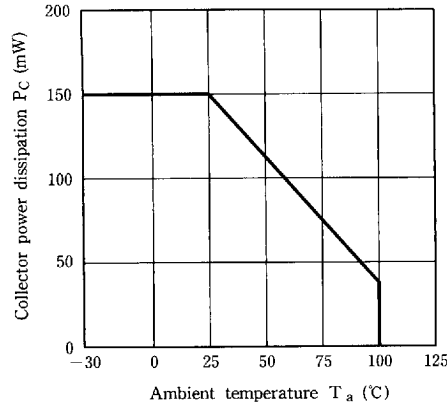


Fig. 4 Current Transfer Ratio vs. Forward Current

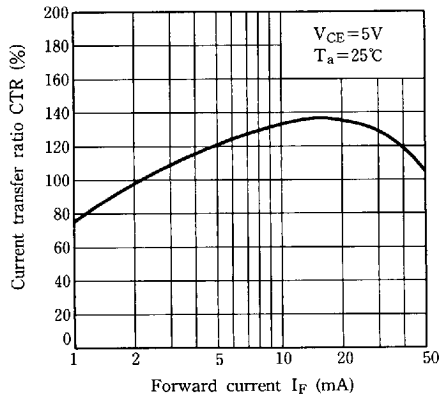


Fig. 6 Collector Current vs. Collector-emitter Voltage

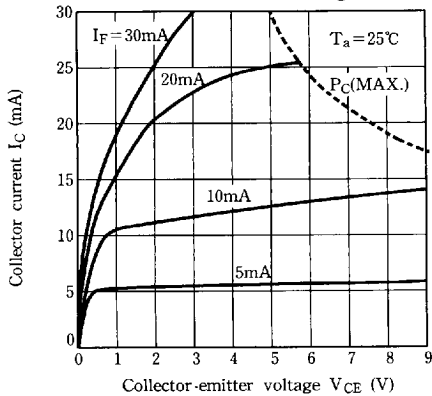


Fig. 3 Peak Forward Current vs. Duty Ratio

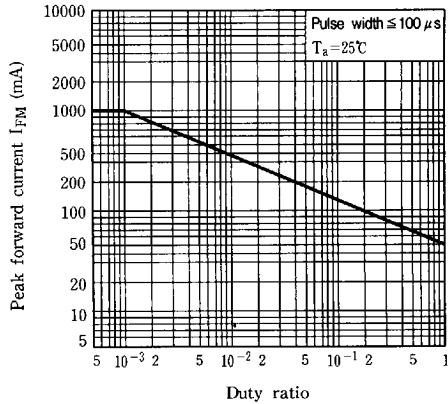


Fig. 5 Forward Current vs. Forward Voltage

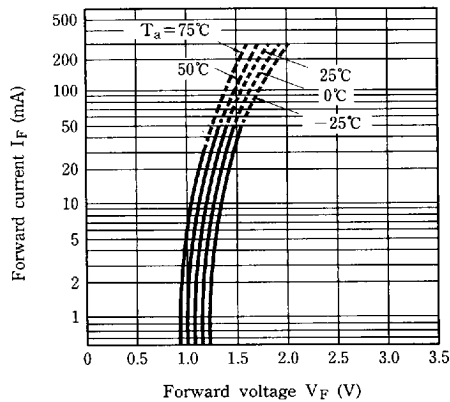


Fig. 7 Relative Current Transfer Ratio vs. Ambient Temperature

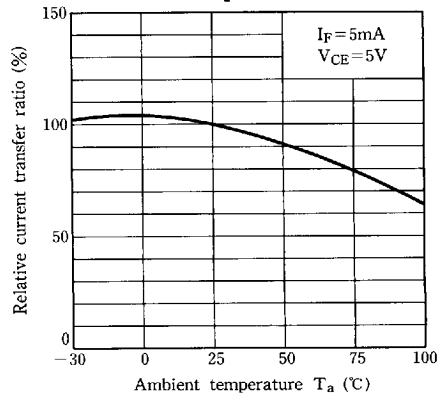
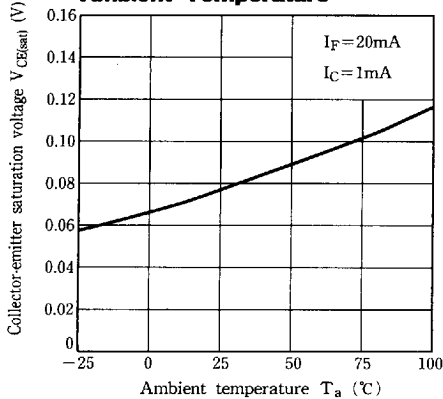
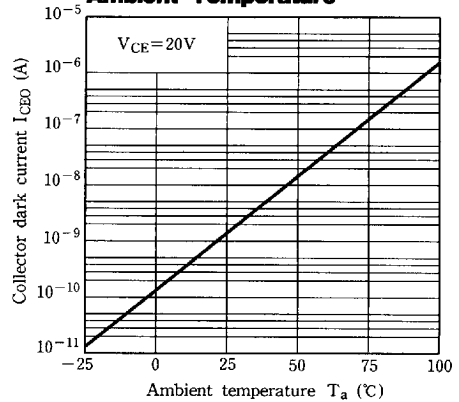
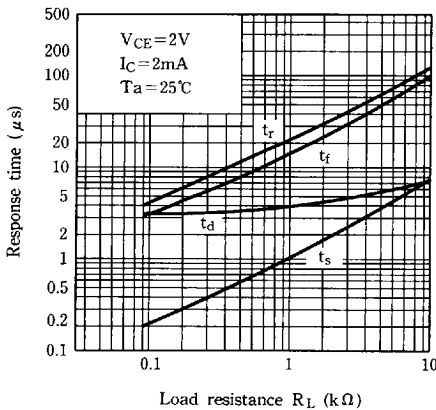
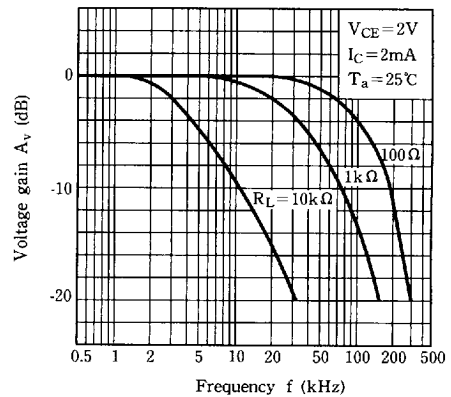
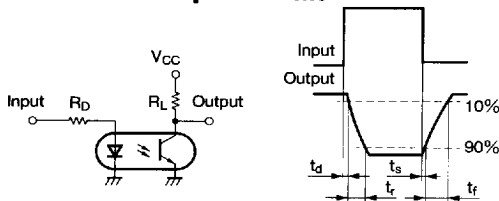

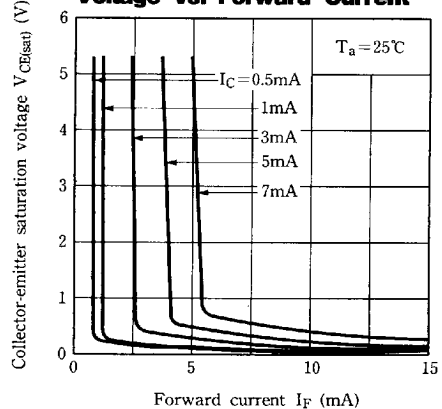


Fig. 8 Collector-emitter Saturation Voltage vs. Ambient Temperature**Fig. 9 Collector Dark Current vs. Ambient Temperature****Fig.10 Response Time vs. Load Resistance****Fig.11 Frequency Response****Test Circuit for Response Time****Test Circuit for Frequency Response****Fig.12 Collector-emitter Saturation Voltage vs. Forward Current**

● Please refer to the chapter "Precautions for Use" (Page 78 to 93)