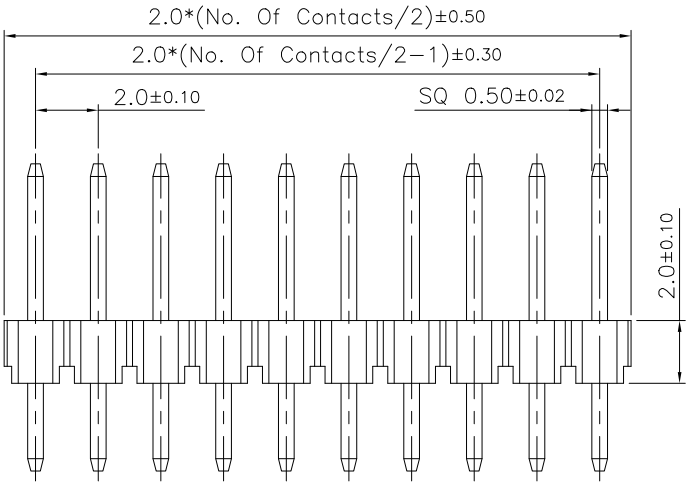
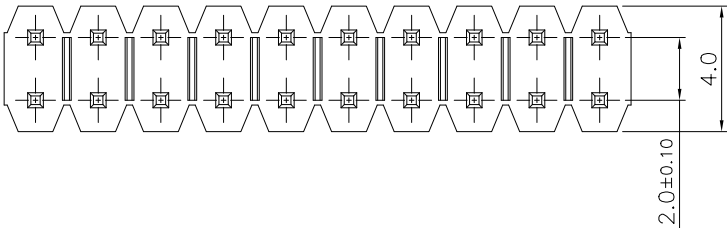


Specifications:
Current Rating: 2.0A AC/DC
Voltage Rating: 250V AC/DC
Contact Resistance: 20m Ohm Max.
Insulation Resistance: 1000M Ohm Min.
Withstanding Voltage: 500V AC/Minute
Temperature Rating: -40°C To +105°C

Materials and Finish:
Insulator: Thermoplastic (UL94V-0)
Insulator Color: Black
Contact: Copper Alloy
Plating: Gold/Matte Tin/Selective Gold Plated

How To Order
2208S-XXX-030
G:Gold Plated
MT:Matte Tin Plated
SG:Gold Plated On Contact Area,
Matte Tin Plated On Solder Tail.
No. of Contacts
Straight Type

RoHS Compliant

F				DRAWN: Brian Hsu	GENERAL TOLERANCE: .X=±0.20 .XX=±0.15	 <i>Neltron Industrial Co., Ltd.</i>		
E								
D				CHECKED: Jerry Chen	UNIT: MM	DESCRIPTION: 2.0mm Pin Header Straight Type	SIZE A4	D
C					SCALE: 1:1			
B				APPROVAL: Rory Chen	SHEET: 1/1	PART NO: 2208S-XXX-030		
A	07-OCT-2024	(PC0643)	Brian Hsu		PROJECTION: 			
REV	DATE	FILE	BY					