
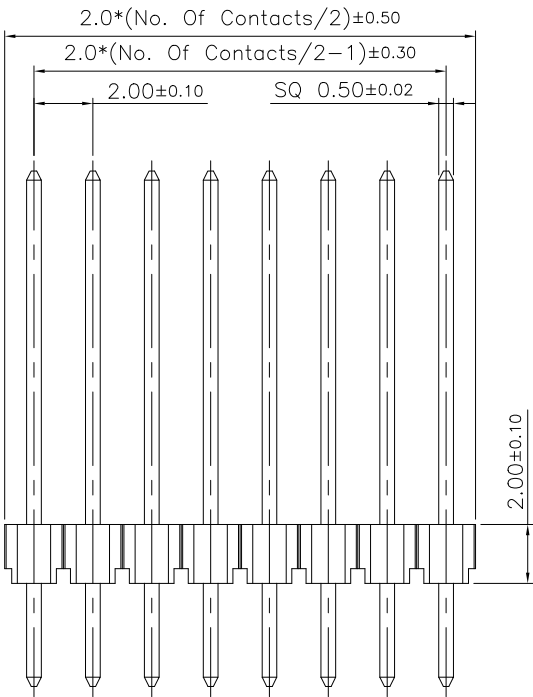
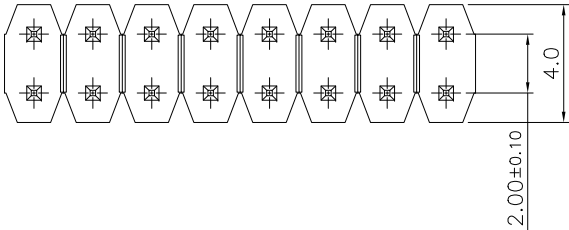


Specifications:
Current rating: 2.0A AC/DC
Voltage Rating: 250V AC/DC
Contact Resistance: 20m ohm Max
Insulation Resistance: 1000M ohm Min
Withstanding Voltage: 500V AC/Minute
Operating Temperature Range: -40°C To +105°C

Materials and Finish
Insulator: Thermoplastic (UL94V-0)
Standard Color: Black
Contact: Copper Alloy
Plating: Gold/Matte Tin/Selective Gold Plated

How To Order
2208S-XXX-033
G:Gold Plated
MT:Matte Tin Plated
SG:Gold Plated On Contact Area,
Matte Tin Plated On Solder Tail.
No. Of Contacts
Straight Type

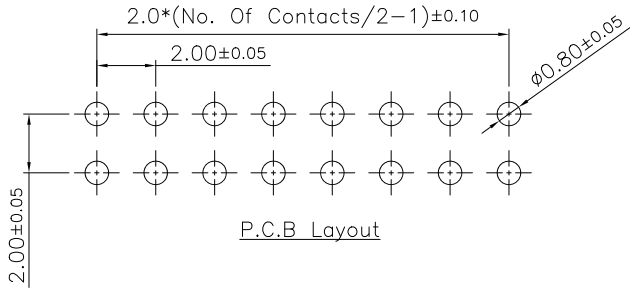

RoHS Compliant

F				DRAWN:	GENERAL TOLERANCE:	Neltron Connectors Neltron Industrial Co., Ltd.	
E				Yizhen Lee	.X=±0.20 .XX=±0.15		
D				CHECKED:	UNIT: MM	DESCRIPTION: 2.00mm Pin Header Double Row Straight Type	
C				Jerry Chen	SCALE: 1:1		
B				APPROVAL:	SHEET: 1/1	PART NO: 2208S-XXX-033	
A	27-NOV-2024	(P0001)	Yizhen Lee	Rory Chen	PROJECTION:		
REV	DATE	FILE	BY				