

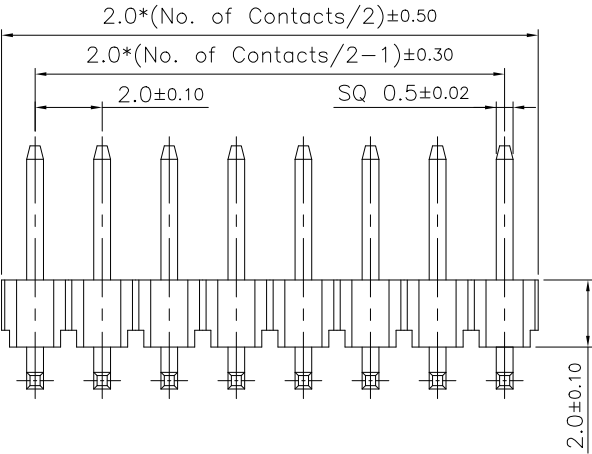
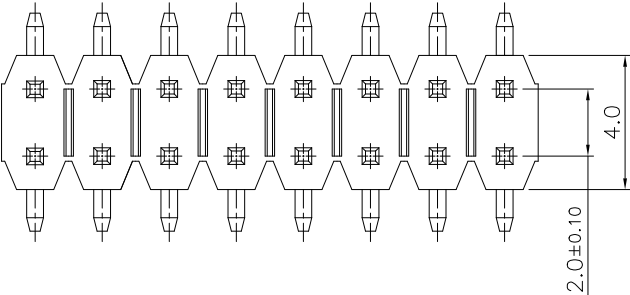





Coplanarity Information:



Pin.No	Coplanarity
4-30P	 0.10
32-40P	 0.12

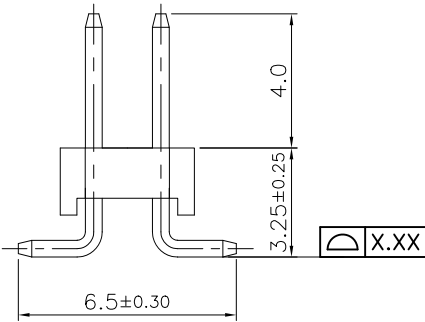

Specifications:
Current Rating: 2.0A AC/DC
Voltage Rating: 250V AC/DC
Contact Resistance: 20m ohm Max.
Insulation Resistance: 1000M ohm min.
Withstanding Voltage: 500V AC/Minute
Operating Temperature Rating: -40°C ~ +105°C


Materials and Finish:
Insulator: High Temperature Plastic (UL94V-0)
Insulator Color: Black
Contact: Copper Alloy
Plated: Gold/Matte Tin/Selective Gold Plated

How to Order:
2208SM-XXX-TB-039

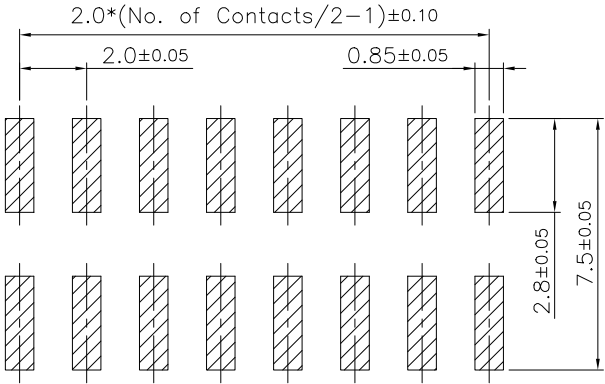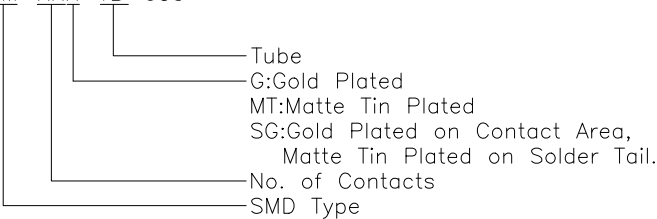

P.C.B. Layout

RoHS Compliant

F				DRAWN:	GENERAL TOLERANCE:	 Neltron Industrial Co., Ltd.	
E				Brian Hsu	.X=±0.20 .XX=±0.15		
D				CHECKED:	UNIT: MM	DESCRIPTION:	SIZE
C				Jerry Chen	SCALE: 1:1	2.0mm Pin Header SMD Type Double Rows	A4
B				APPROVAL:	SHEET: 1/1	PART NO:	
A	15-APR-2025	(PC0643)	Brian Hsu	Rory Chen	PROJECTION: 	2208SM-XXX-TB-039	
REV	DATE	FILE	BY				