





1

2

3

4

5

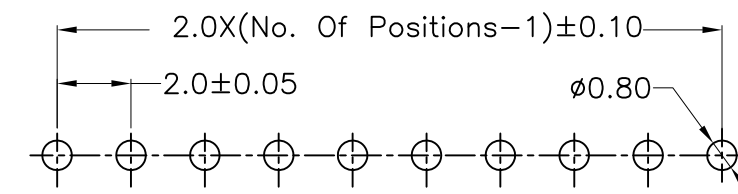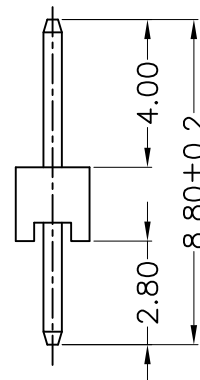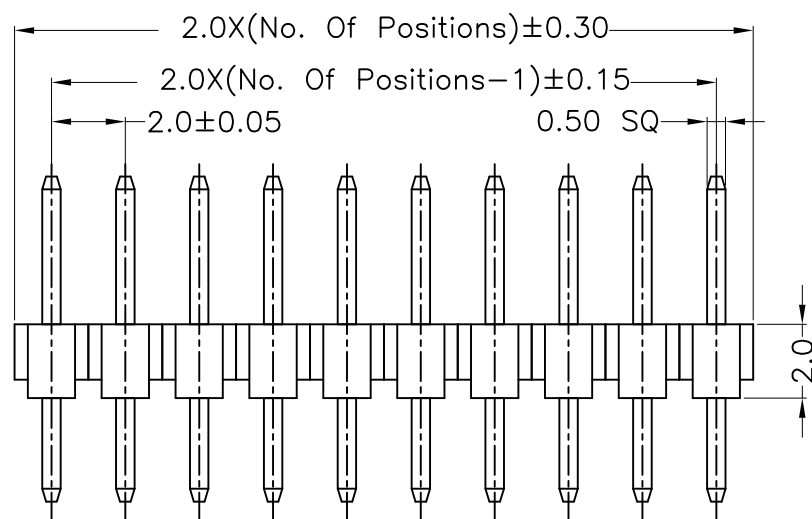

PCB Layout

RoHS Compliant

Specifications:
 Current rating:2.0A AC/DC
 Voltage rating:250V AC/DC
 Contact resistance:20m ohm max.
 Withstanding Voltage:500V AC/minute
 Insulation resistance:1000M ohm min.
 Operating Temperature Rating:-40°C ~ +105°C
 Materials:

Insulator:PBT (UL94V-0)

Standard Color:Black


Contact:Copper Alloy

Plating:Gold Plated

How To Order

2210S-XXG

G:Gold Plated
 No. Of Positions
 Straight Type

F				DRAWN:	GENERAL TOLERANCE:	 Neltron Industrial Co., Ltd.	
E				Cel King	.X=±0.20 .XX=±0.15		
D				CHECKED:	UNIT: MM	DESCRIPTION: 2.0mm Pin Header Straight Type	
C				Jeremy Liu	SCALE: 1:1		
B	04-SEP-2008	ECN-TW0800902	Allen	APPROVAL:	SHEET: 1 / 1	PART NO: 2210S-XXG	
A	04-Nov-2005	(PC0001)	Cel King	Mike Wu	PROJECTION: 		
REV	DATE	FILE	BY				