
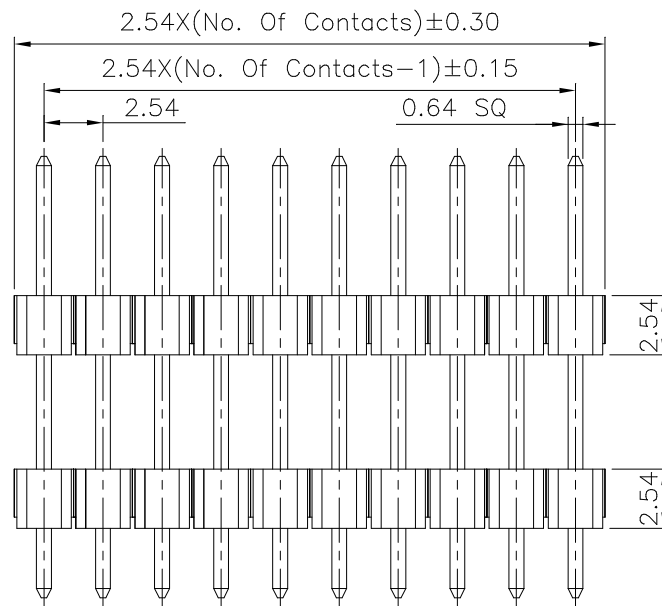


Specifications:
 Current Rating:3.0A AC/DC
 Voltage Rating:250V AC/DC
 Contact Resistance:20m ohm. Max.
 Insulation Resistance:1000M ohm. Min.
 Withstanding Voltage:600V AC For One Minute
 Operating Temperature Range:-40°C To +105°C

Material and Finish
 Insulator:PBT(UL94V-0)
 Insulator Color:Black
 Contact:Copper Alloy
 Plating:Gold Plated, Tin Plated


How To Order
 2211DI-XXX-1900A

Length
 G:Gold Plated
 T:Tin Plated
 No. Of Contacts
 Double Insulator

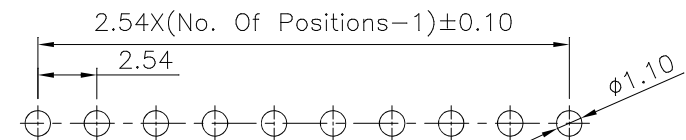

PCB Layout

RoHS Compliant

F				DRAWN:	GENERAL TOLERANCE:	 Neltron Industrial Co., Ltd.	
E				Allen	.X=±0.20 .XX=±0.15		
D				CHECKED:	UNIT: MM	DESCRIPTION: 2.54mm Pin Header	SIZE
C				Jerry Chen	SCALE: 1:1	Double Insulator Straight Type	A4
B				APPROVAL:	SHEET: 1 / 1	PART NO:	
A	24-MAR-2011		Allen	Mike Wu	PROJECTION: 	2211DI-XXX-1900A	
REV	DATE	FILE	BY				