
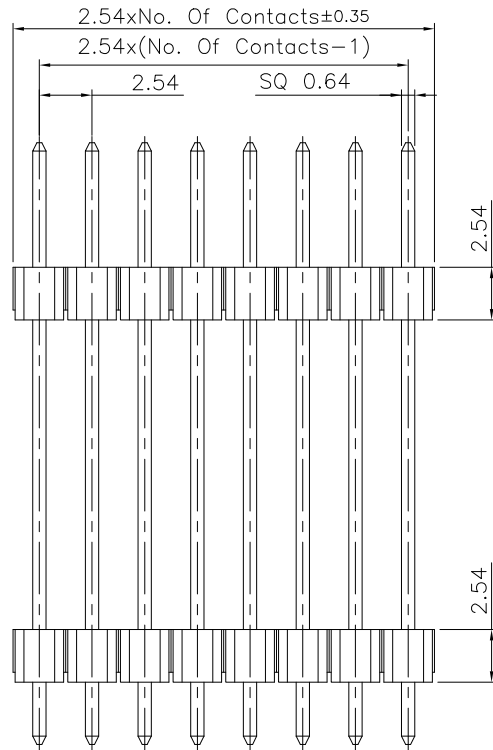
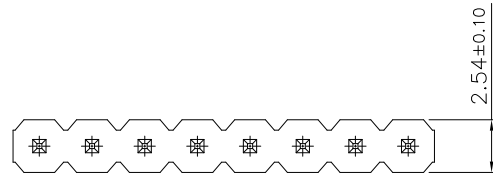


Specifications:
 Current rating:3A AC/DC
 Voltage Rating:250V AC/DC
 Contact Resistance:20m ohm Max
 Insulation Resistance:1000M ohm Min
 Withstanding Voltage:600V AC For one Minute
 Operating Temperature Range:−40°C To +105°C

Materials and Finish
 Insulator:PBT (UL94V−0)
 Color:Black
 Contact:Copper Alloy
 Plating:Gold/Matte Tin/Selective Gold Plated

How To Order
 2211DI−XXX−2900E
 Length
 G:Gold Plated
 MT:Matte Tin Plated
 SG:Gold Plated On Contact Area,
 Matte Tin Plated On Solder Tail.
 No. Of Contacts
 Double Insulator

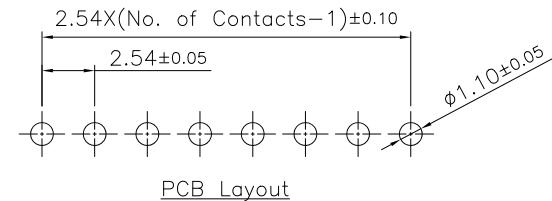

RoHS Compliant

F				DRAWN: Cherry	GENERAL TOLERANCE: .X=±0.20 .XX=±0.15	 Neltron Industrial Co., Ltd.		
E								
D								
C				CHECKED: Dennis Lin	UNIT: MM	DESCRIPTION: 2.54mm Pin Header Double Insulator Straight Type		SIZE A4
B					SCALE: 1:1			
A	27-JUN-2013		Cherry	APPROVAL: Mike Wu	SHEET: 1/1	PART NO: 2211DI-XXX-2900E		
REV	DATE	FILE	BY		PROJECTION:			