
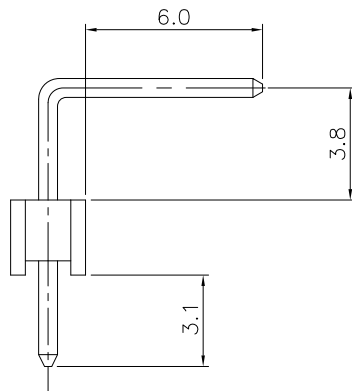
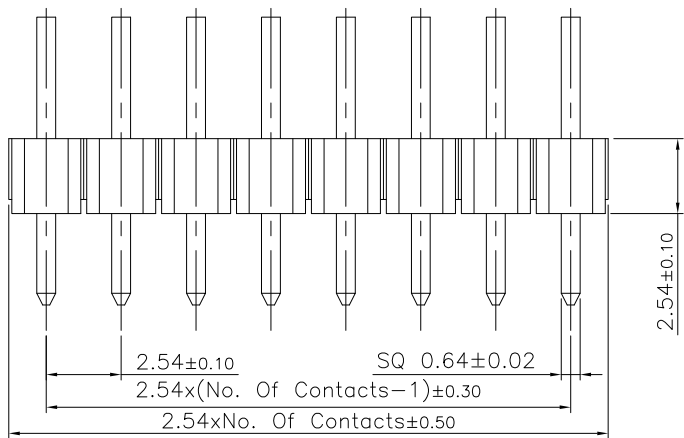


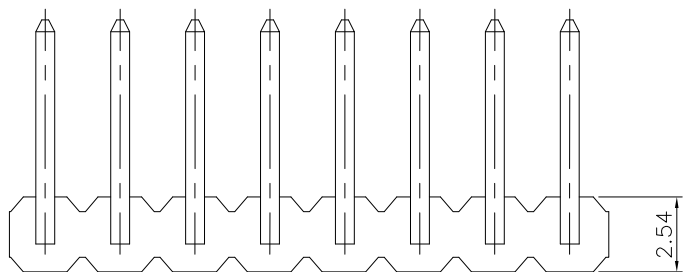


Specifications:
Current Rating: 3.0A AC,DC
Voltage Rating: 250V AC,DC
Contact Resistance: 20m ohm.Max
Insulation Resistance: 1000M ohm.Min
Withstanding Voltage: 600V AC/Minute
Operating Temperature Range: -40°C ~ +105°C

Material And Finish:
Insulator:Thermoplastic (UL94V-0)
Insulator Color:Black
Contact:Copper Alloy
Plated:Gold/Matte Tin/Selective Gold Plated


How To Order
2211R-XXX-017

G:Gold Plated
MT:Matte Tin Plated
SG:Gold Plated On Contact Area,
Matte Tin Plated On Solder Tail.
No. of Contacts
Right Angle

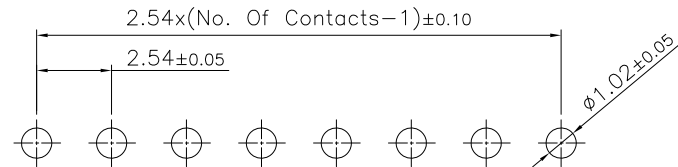

P.C.B Layout

RoHS Compliant

F				DRAWN: Cindy Yang	GENERAL TOLERANCE: .X=±0.20 .XX=±0.15	 Neltron Industrial Co., Ltd.		
E								
D				CHECKED: Jerry Chen	UNIT: MM	DESCRIPTION: 2.54mm Pin Header Single Row Right Angle Type	SIZE	
C					SCALE: 1:1			
B				APPROVAL: Rory Chen	SHEET: 1/1	PART NO: 2211R-XXX-017	A4	
A	02-JUN-2023	(P0001)	Cindy		PROJECTION: 			
REV	DATE	FILE	BY					