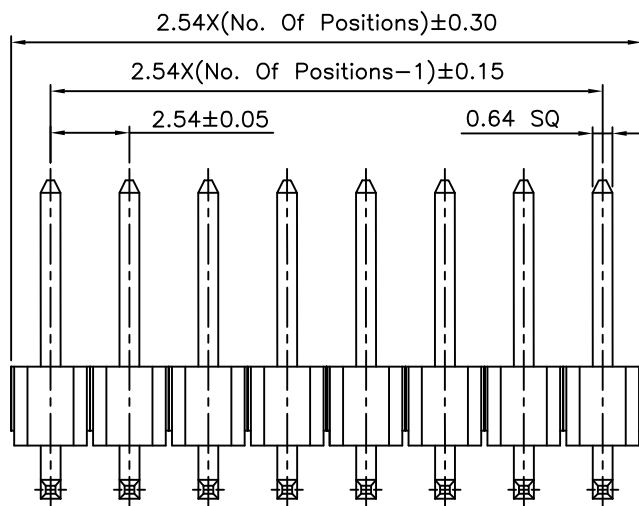
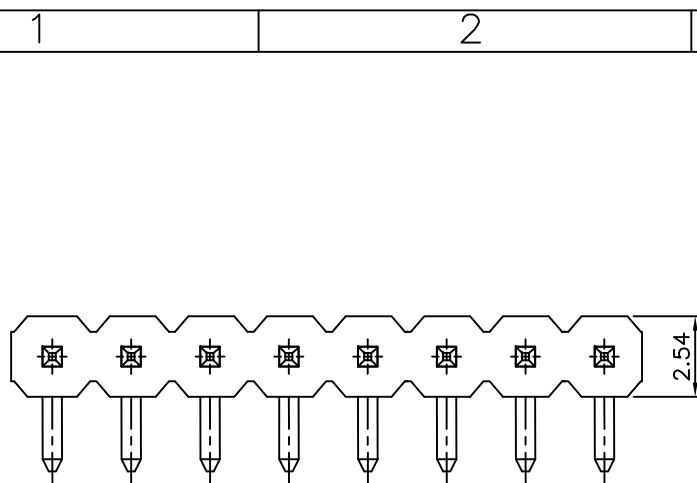


Specifications:

Current Rating:3.0A AC/DC

Voltage Rating:250V AC/DC

Contact Resistance:20m ohm. Max.

Insulation Resistance:1000M ohm. Min.

Withstanding Voltage:600V AC For One Minute

Operating Temperature Range:-40°C To +105°C

Material and Finish

Insulator:PBT (UL94V-0)

Insulator Color:Black


Contact:Copper Alloy

Plating:Gold Plated,Tin Plated

How To Order

2211R-XXX-LP

LP:Low Profile Type
G:Gold Plated
T:Tin Plated
No.of Positions
R:Right Angle

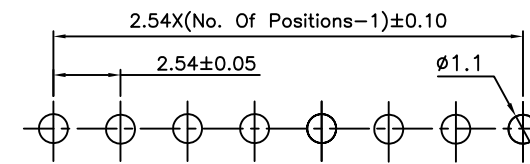

PCB Layout

RoHS Compliant

F				DRAWN:	GENERAL TOLERANCE:	 Neltron Industrial Co., Ltd.	
E				Allen	.X=±0.20 .XX=±0.15		
D				CHECKED:	UNIT: MM	DESCRIPTION: 2.54mm Pin Header Single Row Right Angle Type	
C				Jerry Chen	SCALE: 1:1		
B				APPROVAL:	SHEET: 1 / 1	PART NO: 2211R-XXX-LP	
A	04-NOV-2009	(PC0001)	Allen	Mike Wu	PROJECTION:		
REV	DATE	FILE	BY				SIZE A4