

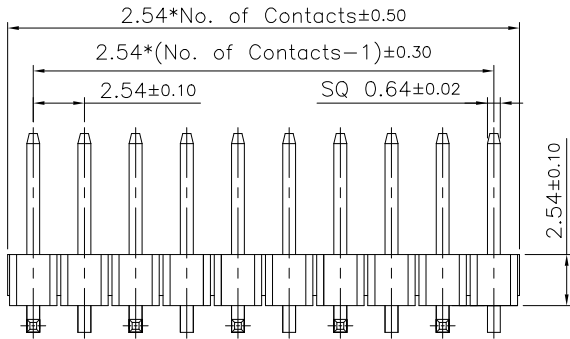
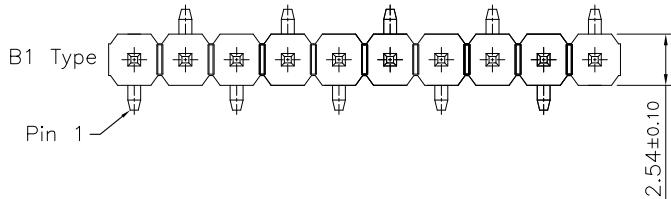


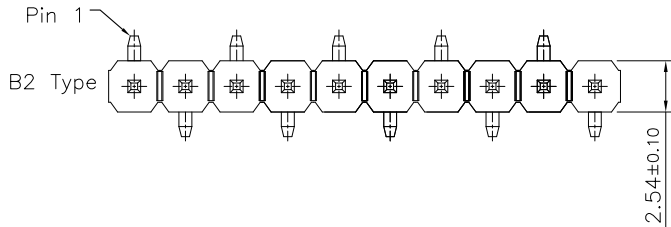

Coplanarity Information:

Pin.No	Coplanarity
2-15P	0.10
16-20P	0.12
21-30P	0.15
31-40P	0.20




Specifications:
Current Rating: 3.0A AC/DC
Voltage Rating: 250V AC/DC
Contact Resistance: 20m ohm. Max
Insulation Resistance: 1000M ohm. Min
Withstanding Voltage: 500V AC/Minute
Operating Temperature Range: -40°C ~ +105°C

Material And Finish:
Insulator: High Temperature Plastic (UL94V-0)
Insulator Color: Black
Contact: Copper Alloy
Plated: Gold/Matte Tin/Selective Gold Plated

How To Order
2211SM-XXX-BX-TB-024

Tube
B1:B1 Type
B2:B2 Type
G:Gold Plated
MT:Matte Tin Plated
SG:Gold Plated on Contact Area,
Matte Tin Plated on Solder Tail.
No. of Contacts
SMD Type

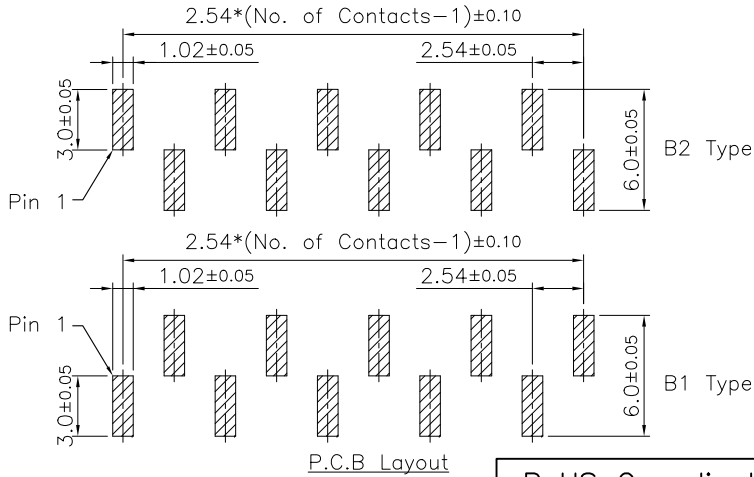

RoHS Compliant

F				DRAWN: Brian Hsu	GENERAL TOLERANCE: .X=±0.20 .XX=±0.15	 Neltron Industrial Co., Ltd.	
E							
D				CHECKED: Jerry Chen	UNIT: MM	DESCRIPTION: 2.54mm Pin Header Single Row SMD Type	SIZE A4
C					SCALE: 1:1		
B				APPROVAL: Rory Chen	SHEET: 1/1	PART NO: 2211SM-XXX-BX-TB-024	
A	24-JAN-2025	(PC0643)	Brian Hsu		PROJECTION: 		
REV	DATE	FILE	BY				