
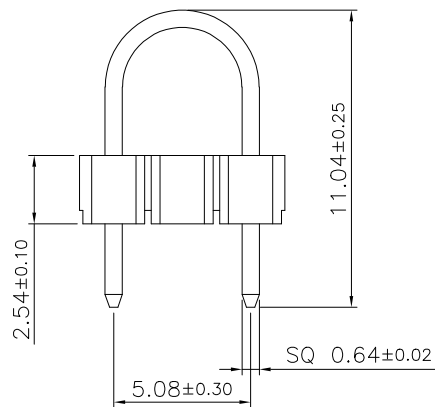



Specification:
 Current Rating: 3.0A AC,DC
 Contact Resistance: 20m ohm.Max
 Insulation Resistance: 1000M ohm.Min
 Withstanding Voltage: 500V AC/Minute
 Operating Temperature Range: -40°C ~ +105°C

Material:
 Insulator: High Temperature Plastic (UL94V-0)
 Insulator: Color: Black
 Contact: Copper Alloy
 Plated: Gold/Matte Tin/Selective Gold Plated


How To Order
 2211U-03X-002-F5

G: Gold Plated
 MT: Matte Tin Plated
 SG: Gold Plated On Contact Area,
 Matte Tin Plated On Solder Tail.
 No. Of Contacts
 U Type



P.C.B. Layout

RoHS Compliant

F				DRAWN:	GENERAL TOLERANCE:	 Neltron Industrial Co., Ltd.	
E				JAMIE	.X=±0.20 .XX=±0.15		
D				CHECKED:	UNIT: MM	DESCRIPTION:	SIZE
C				JERRY	SCALE:	2.54mm Pin Header U Type	A4
B				APPROVAL:	SHEET: 1/1	PART NO:	
A	01-DEC-2023	(PC0643)	JAMIE	RORY	PROJECTION: 	2211U-03X-002-F5	
REV	DATE	FILE	BY				