




1

2

3

4

5

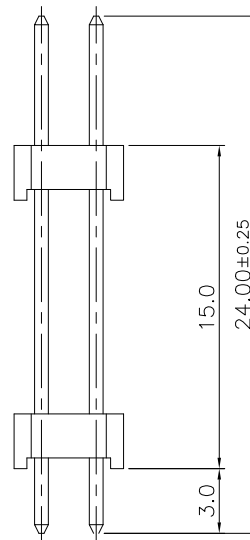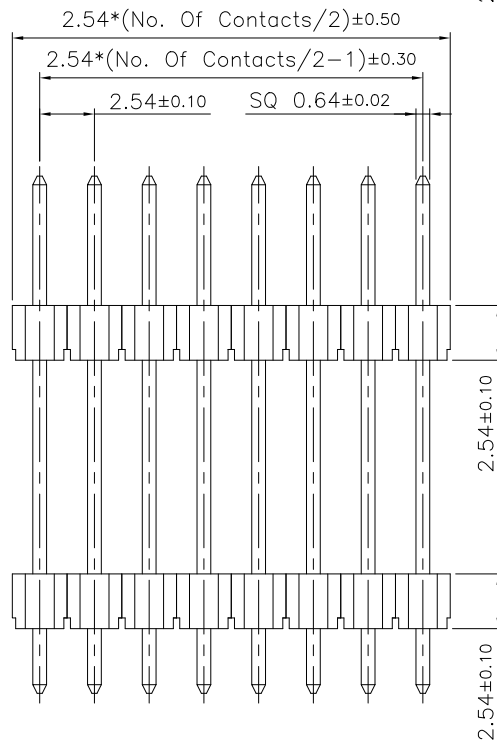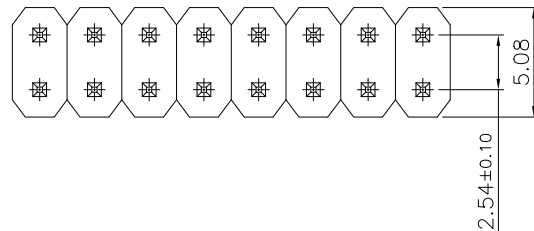

Specifications:

Current rating:3A AC/DC

Voltage Rating:250V AC/DC

Contact Resistance:20m ohm Max

Insulation Resistance:1000M ohm Min

Withstanding Voltage:600V AC For one Minute

Operating Temperature Range:-40°C To +105°C

Materials and Finish

Insulator:Thermoplastic (UL94V-0)

Insulator Color:Black

Contact:Copper Alloy

Plating:Gold/Matte Tin/Selective Gold Plated

How To Order

2213DI-XXX-045


G:Gold Plated

MT:Matte Tin Plated

SG:Gold Plated On Contact Area,
Matte Tin Plated On Solder Tail.


No. Of Contacts

Double Insulator

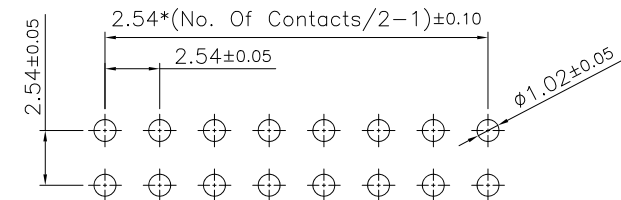

P.C.B Layout

RoHS Compliant

F				DRAWN: Lucy Du	GENERAL TOLERANCE: .X=±0.20 .XX=±0.15	 Neltron Industrial Co., Ltd.		
E								
D				CHECKED: Jerry Chen	UNIT: MM	DESCRIPTION: 2.54mm Pin Header Double Insulator Straight Type		SIZE A4
C					SCALE: 1:1			
B				APPROVAL: Rory Chen	SHEET: 1/1	PART NO: 2213DI-XXX-045		
A	20-OCT-2023	(P0001)	Lucy Du		PROJECTION: 			
REV	DATE	FILE	BY					