


1	2	3	4	5
---	---	---	---	---

Specifications:
 Current Rating:3.0A AC/DC
 Voltage Rating:250V AC/DC
 Contact Resistance:20m Ohm. Max.
 Insulation Resistance:1000M Ohm. Min.
 Withstanding Voltage:500V AC For One Minute
 Operating Temperature Range:-40°C To +105°C


Material And Finish
 Insulator:Thermoplastic (UL94V-0)
 Insulator Color:Black
 Contact:Copper Alloy
 Plating:Gold/Matte Tin/Selective Gold Plated

How To Order
 2213R-XXX
 G:Gold Plated
 MT:Matte Tin Plated
 SG:Gold Plated On Contact Area,
 Matte Tin Plated On Solder Tail.
 No. of Contacts
 Right Angle

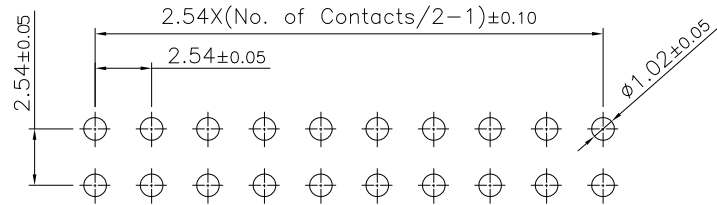

P.C.B Layout

RoHS Compliant

F				DRAWN: Cindy Yang	GENERAL TOLERANCE: .X=±0.20 .XX=±0.15	 Neltron Industrial Co., Ltd.			D
E									
D				CHECKED: Jerry Chen	UNIT: MM	DESCRIPTION: 2.54mm Pin Header Double Row Right Angle Type		SIZE A4	
C					SCALE: 1:1				
B				APPROVAL: Rory Chen	SHEET: 1/1	PART NO: 2213R-XXX			
A	01-JUN-2023	(P0001)(P0084)	Cindy		PROJECTION: 				
REV	DATE	FILE	BY						