




1

2

3

4

5

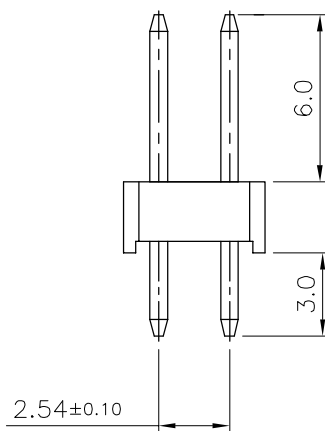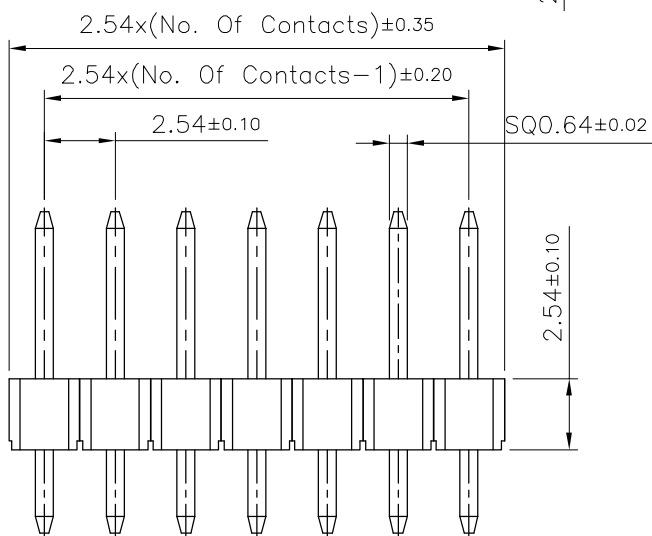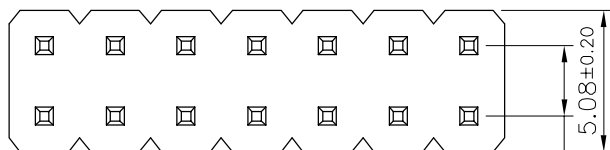


Specifications:
 Current rating:3A AC/DC
 Voltage Rating:250V AC/DC
 Contact Resistance:20m ohm Max
 Insulation Resistance:1000M ohm Min
 Withstanding Voltage:500V AC For one Minute
 Operating Temperature Range:-40°C To +105°C

Materials and Finish
 Insulator:PBT(UL94V-0)
 Standard Color:Black
 Contact:Brass
 Plating:Gold/Tin/Selective Gold Plated

How To Order
 2213S-XXX

G:Gold Plated
 T:Tin Plated
 SG:Selective Gold Plated
 No. Of Contacts
 Straight Type

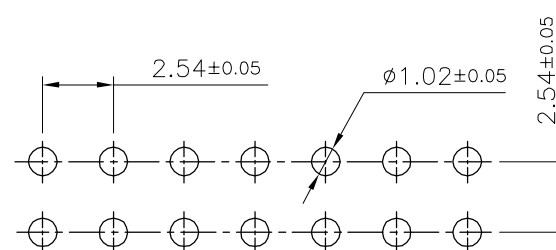

PCB Layout

RoHS Compliant

F

E

D

C

B

A

REV

20-Jul-2021

DATE

FILE

Jerry Chen

BY

DRAWN:

Romina Wu

CHECKED:

Jerry Chen

APPROVAL:

Rory Chen

GENERAL TOLERANCE:


.X=±0.20
 .XX=±0.15

UNIT: MM

SCALE: 1:1

SHEET: 1 / 1

PROJECTION:



Neltron Industrial Co., Ltd.

DESCRIPTION:

2.54mm Pin Header Double Row Straight Type

PART NO:

2213S-XXX

SIZE

A4

D