
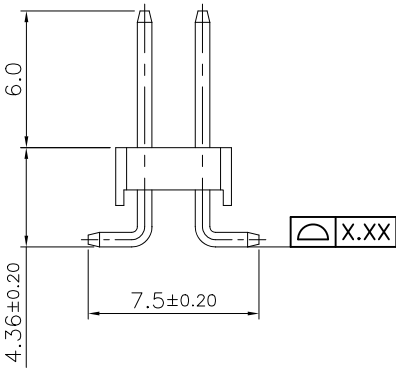


Coplanarity Information:



Pin No.	Coplanarity
4-30P	0.10
32-40P	0.12

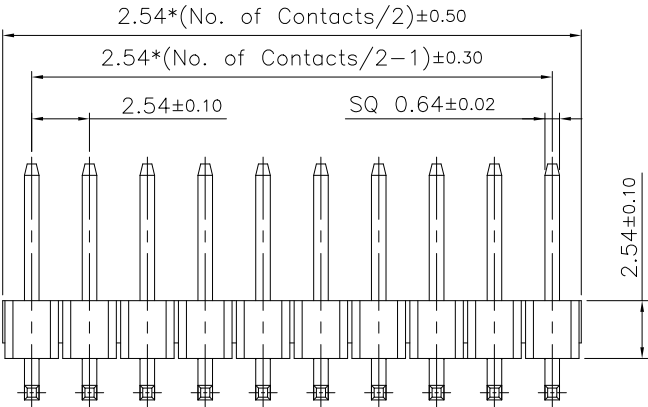

Specifications:
Current Rating: 3.0A AC/DC
Voltage Rating: 250V AC/DC
Contact Resistance: 20m ohm Max
Insulation Resistance: 1000M ohm Min
Withstanding Voltage: 500V/Minute
Operating Temperature Range: -40°C To +105°C

Materials and Finish
Insulator: High Temperature Plastic (UL94V-0)
Insulator Color: Black
Contact: Copper Alloy
Plating: Gold/Matte Tin/Selective Gold Plated

How To Order
2213SM-XXX-TB-035

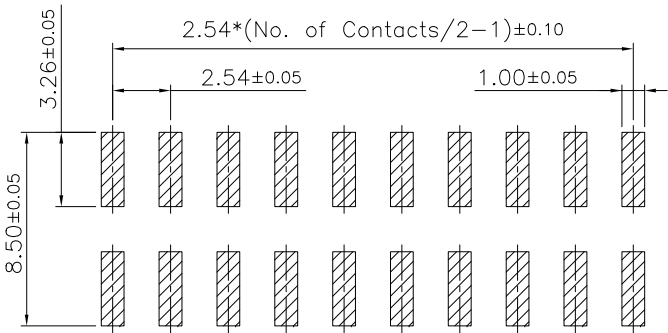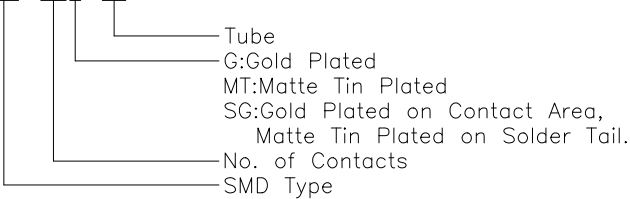

P.C.B Layout

RoHS Compliant

F				DRAWN: Brian Hsu	GENERAL TOLERANCE: .X=±0.20 .XX=±0.15	 Neltron Industrial Co., Ltd.		D
E								
D				CHECKED: Jerry Chen	UNIT: MM	DESCRIPTION: 2.54mm Pin Header Double Rows SMD Type	SIZE A4	
C					SCALE: 1:1			
B				APPROVAL: Rory Chen	SHEET: 1/1	PART NO: 2213SM-XXX-TB-035		
A	24-JAN-2025	(PC0643)	Brian Hsu		PROJECTION: 			
REV	DATE	FILE	BY					