
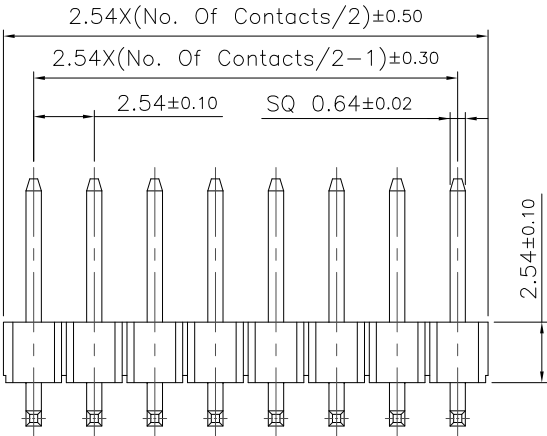
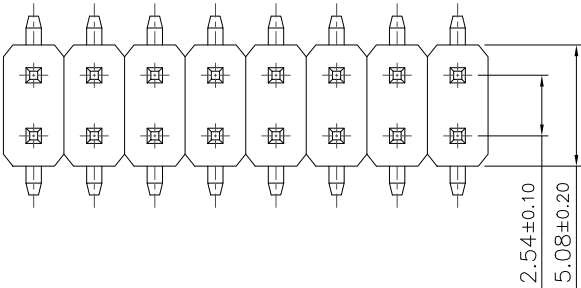


Specifications:
Current Rating:3A AC/DC
Voltage Rating:250V AC/DC
Contact Resistance:20m ohm. Max.
Insulation Resistance:1000M ohm. Min.
Withstanding Voltage:600V AC For One Minute
Operating Temperature Range:-40°C To +105°C

Materials:
Insulator:High Temperature Plastic (UL94V-0)
Insulator Color:Black
Contact:Copper Alloy
Plating:Gold/Matte Tin/Selective Gold Plated

How To Order
2213SM-XXX-TB-035

- Tube
- G:Gold Plated
- MT:Matte Tin Plated
- SG:Gold Plated On Contact Area, Matte Tin Plated On Solder Tail.
- No. Of Contacts
- SMD Type

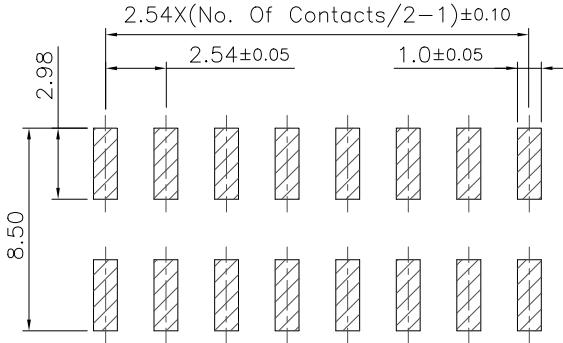

P.C.B. Layout

RoHS Compliant

F				DRAWN:	GENERAL TOLERANCE:	NeltronConnectors Neltron Industrial Co., Ltd.	
E				Jamie Chuang	.X=±0.20 .XX=±0.15		
D				CHECKED:	UNIT: MM	DESCRIPTION:	SIZE
C				Jerry Chen	SCALE: 1:1	2.54mm Pin Header SMD Type	A4
B				APPROVAL:	SHEET: 1/1	PART NO:	
A	30-NOV-2023	(P0001)	Jamie	Rory Chen	PROJECTION:	2213SM-XXX-TB-035	
REV	DATE	FILE	BY				