

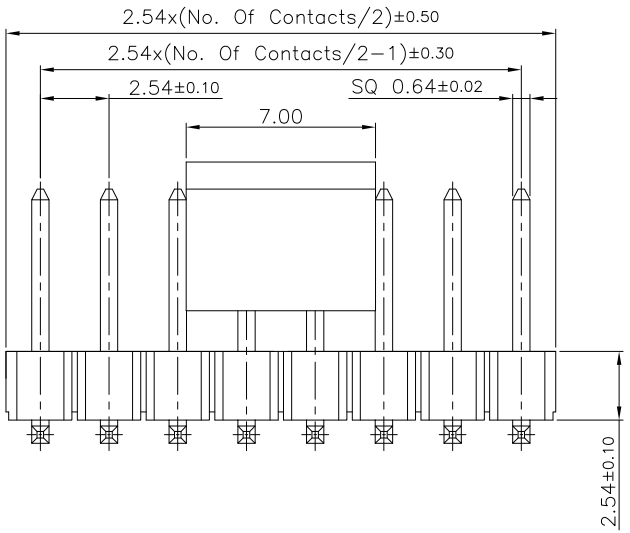


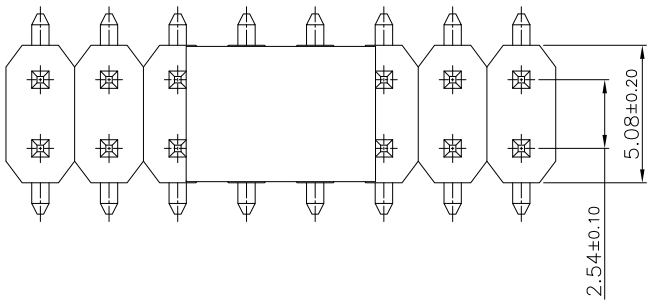

Coplanarity Information:

Pin.No	Coplanarity
2~30P	0.10
32~40P	0.12


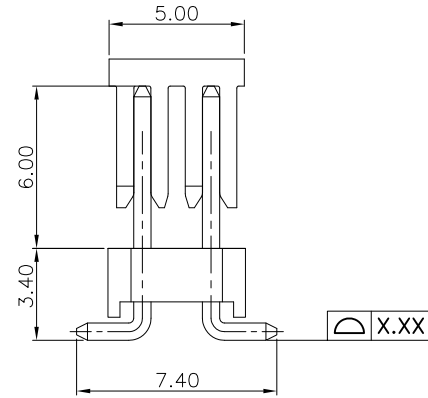


Specifications:
Current rating:3A AC/DC
Voltage Rating:250V AC/DC
Contact Resistance:20m ohm Max
Insulation Resistance:1000M ohm Min
Withstanding Voltage:500V AC For one Minute
Operating Temperature Range:-40°C To +105°C

Materials and Finish
Insulator:High Temp. Plastic(UL94V-0)
Insulator Color:Black
Contact:Copper Alloy
Plating:Gold/Matte Tin/Selective Gold Plated

How To Order

2213SM-XXX-CT-012

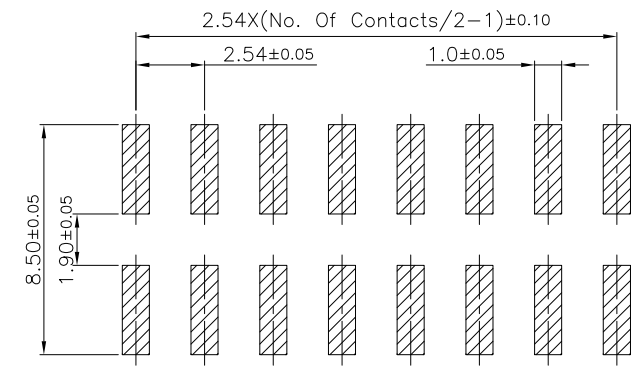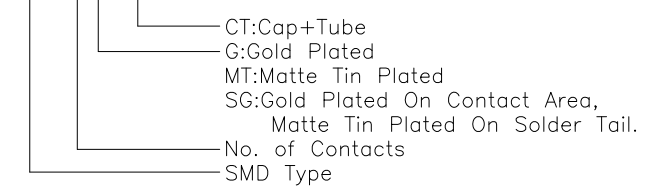

P.C.B Layout

RoHS Compliant

F				DRAWN: Jamie Chuang	GENERAL TOLERANCE: .X=±0.20 .XX=±0.15	 Neltron Industrial Co., Ltd.			D
E									
D				CHECKED: Jerry Chen	UNIT: MM	DESCRIPTION: 2.54mm Pin Header Double Row SMD Type		SIZE A4	
C					SCALE: 1:1				
B				APPROVAL: Rory Chen	SHEET: 1/1	PART NO: 2213SM-XXX-CT-012			
A	18-APR-2023	.	Jamie Chuang		PROJECTION: 				
REV	DATE	FILE	BY						