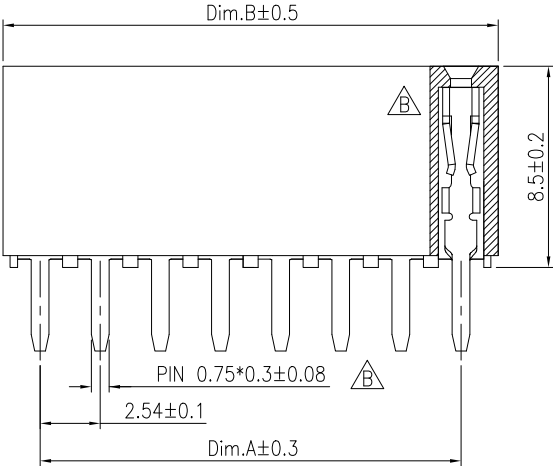
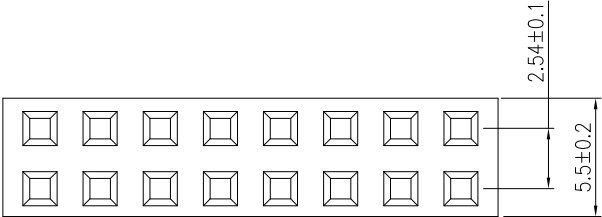



Specifications:
Current Rating:3A AC/DC
Voltage Rating:250V AC/DC
Contact Resisittance:20m ohm Max.
Insulation Resisittance:1000M ohm Min.
Withstanding Voltage:500V AC/minute
Operating Temperature Range:-40°C~+105°C

Material and Finish
Insulator:PBT (UL94V-0)
Contact:Phosphor Bronze
Plating:Gold/Matte Tin Plated

How To Order
2214S-XXX-85-SJ
Plastic Height 8.5mm
G:Gold Plated
T:Matte Tin Plated
No. of Contacts
Straight

Dimension Information:

No.	Dim.A	Dim.B	No.	Dim.A	Dim.B	No.	Dim.A	Dim.B	No.	Dim.A	Dim.B
4	2.54	5.58	24	27.94	30.98	44	53.34	56.38	64	78.74	81.78
6	5.08	8.12	26	30.48	33.52	46	55.88	58.92	66	81.28	84.32
8	7.62	10.66	28	33.02	36.06	48	58.42	61.46	68	83.82	86.86
10	10.16	13.20	30	35.56	38.60	50	60.96	64.00	70	86.36	89.40
12	12.70	15.74	32	38.10	41.14	52	63.50	66.54	72	88.90	91.94
14	15.24	18.28	34	40.64	43.68	54	66.04	69.08	74	91.44	94.48
16	17.78	20.82	36	43.18	46.22	56	68.58	71.62	76	93.98	97.02
18	20.32	23.36	38	45.72	48.76	58	71.12	74.16	78	96.52	99.56
20	22.86	25.90	40	48.26	51.30	60	73.66	76.70	80	99.06	102.10
22	25.40	28.44	42	50.80	53.84	62	76.20	79.24			

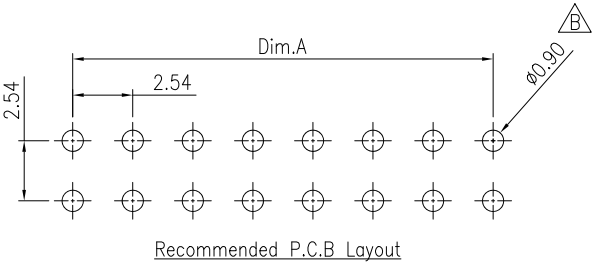

RoHS Compliant

F

E

D

C

B

A

REV

18-DEC-2023

27-FEB-2023

13-Oct-2016

DATE

Add Plated Option

FILE

Lisy

Andrew

Pingchia

BY

DRAWN:

CHECKED:

APPROVAL:

Pingchia

Jerry Chen

Mike Wu

GENERAL TOLERANCE:

UNIT: MM

SCALE: 1:1

SHEET: 1/1

PROJECTION:

.X=±0.20

.XX=±0.15

.XXX=±0.10

Neltron

Connectors

Neltron Industrial Co., Ltd.

DESCRIPTION:

PART NO:

2.54mm PCB Socket 8.5mm Height

2214S-XXX-85-SJ

SIZE

A4