
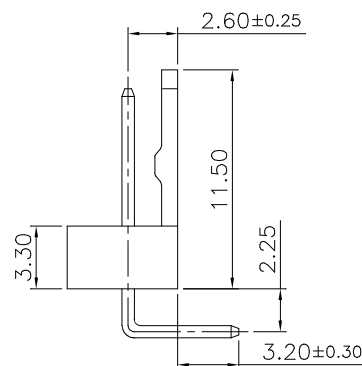

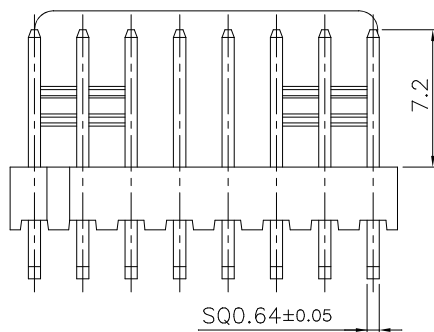


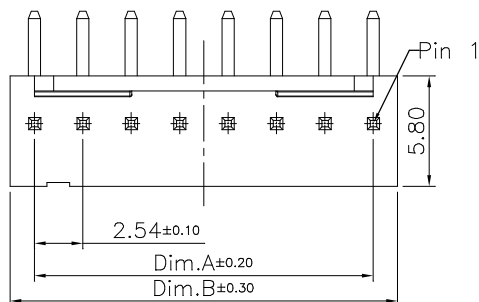

Specifications:

Current Rating:3.0A AC/DC


Voltage Rating:250V AC/DC

Contact Resistance:20m Ohm Max

Insulation Resistance:1000M Ohm Min.

Withstanding Voltage:1000V AC/Minute

Operating Temperature Range: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$



Material and Finish:

Insulator: Nylon 66 (UL94V-0)

Insulator Color: Beige White

Contact: Brass

Plating: Tin Plated

How To Order

2217R-XX-WH2-322272


—WH2:Beige White

—No. of Contacts

—R:Right Angle Type

Dimension:

Circuits	Dimension:		Circuits	Dimension:	
	A	B		A	B
02	2.54	5.08	12	27.94	30.48
03	5.08	7.62	13	30.48	33.02
04	7.62	10.16	14	33.02	35.56
05	10.16	12.70	15	35.56	38.10
06	12.70	15.24	16	38.10	40.64
07	15.24	17.78	17	40.64	43.18
08	17.78	20.32	18	43.18	45.72
09	20.32	22.86	19	45.72	48.26
10	22.86	25.40	20	48.26	50.80
11	25.40	27.94			

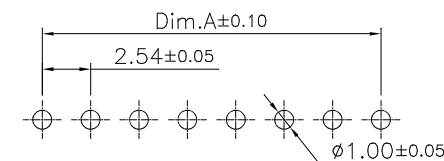

P.C.B Layout

RoHS Compliant

F				DRAWN: Lisy Liu	GENERAL TOLERANCE: .X=±0.20 .XX=±0.15	 Neltron Industrial Co., Ltd.	
E							
D							
C				CHECKED: Jerry Chen	UNIT: MM	DESCRIPTION: 2.54mm Wire To Board Wafer R/A Type	SIZE
B					SCALE: 1:1		
A	20-Jun-2023	(P0001)	Lisy	APPROVAL: Rory Chen	SHEET: 1/1	PART NO: 2217R-XX-WH2-322272	A4
REV	DATE	FILE	BY		PROJECTION: 		