
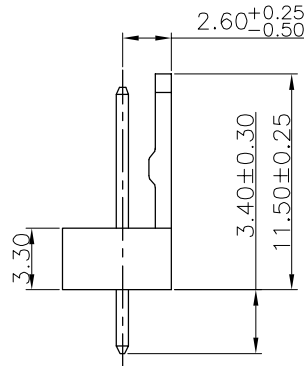

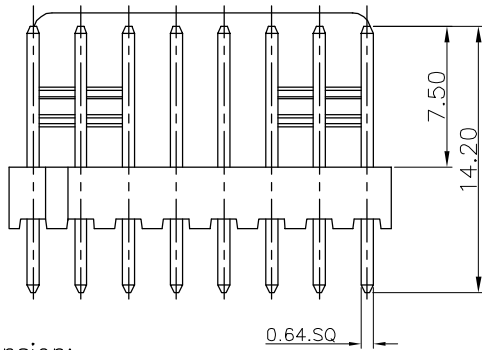


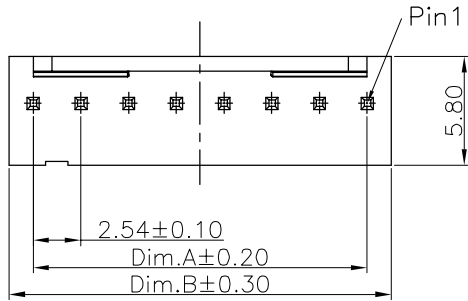


Specifications:
 Current Rating:3.0A AC/DC
 Voltage Rating:250V AC/DC
 Contact Resistance:20m Ohm Max
 Insulation Resistance:1000M Ohm Min.
 Withstanding Voltage:1000V AC/Minute
 Operating Temperature Range:-40°C To +105°C

Material and Finish:
 Insulator:Nylon 66 (UL94V-0)
 Insulator Color:Beige White
 Contact:Brass
 Plating:Tin Plated

How To Order
 2217S-XX-WH2
 WH2:Beige White
 No. Of Contacts
 Straight Type

Dimension:

Circuits	Dimension:		Circuits	Dimension:	
	A	B		A	B
02	2.54	5.08	12	27.94	30.48
03	5.08	7.62	13	30.48	33.02
04	7.62	10.16	14	33.02	35.56
05	10.16	12.70	15	35.56	38.10
06	12.70	15.24	16	38.10	40.64
07	15.24	17.78	17	40.64	43.18
08	17.78	20.32	18	43.18	45.72
09	20.32	22.86	19	45.72	48.26
10	22.86	25.40	20	48.26	50.80
11	25.40	27.94			

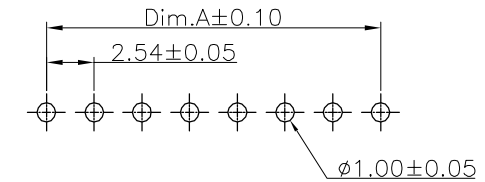

P.C.B layout

RoHS Compliant

F				DRAWN:	GENERAL TOLERANCE:	 Neltron Industrial Co., Ltd.	
E				Lisy Liu	.X=±0.2 .XX=±0.15		
D				CHECKED:	UNIT: MM	DESCRIPTION: 2.54mm Wire to Board Wafer Straight Type	
C				Jerry Chen	SCALE:1:1		
B				APPROVAL:	SHEET: 1 / 1	PART NO: 2217S-XX-WH2	
A	03-Nov-2019	(P0001)	Jerry Chen	Mike Wu	PROJECTION:		
REV	DATE	FILE	BY				

A4