

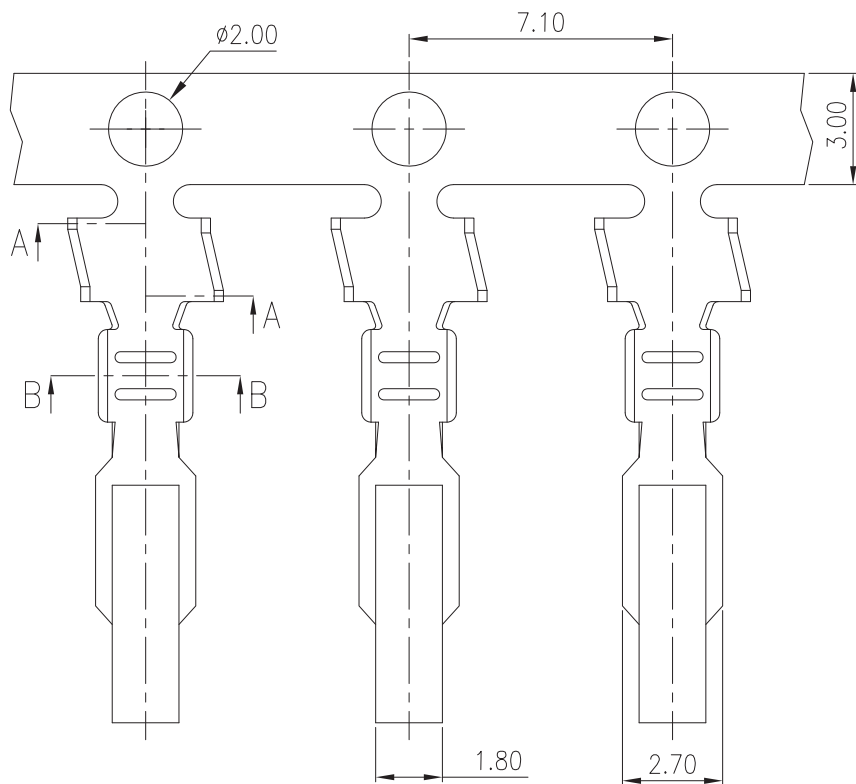



Section:A-A

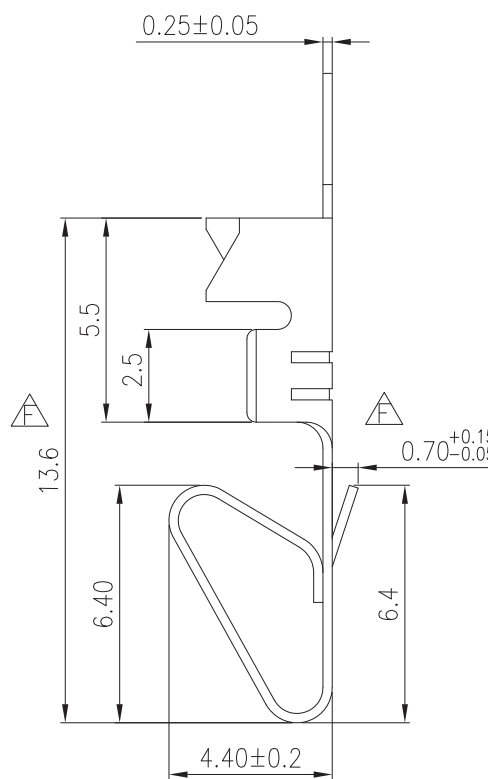

Section:B-B

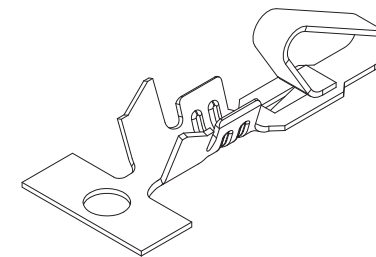


Specifications:

Current Rating:7.0A AC/DC $\triangle$
Voltage Rating:250V AC/DC
Contact Resistance:20m ohm. max.
Withstanding Voltage:1,500V AC/minute
Operating Temperature Range:-40°C~+105°C
Application Wires:AWG #22 to #18
Mates With 2220H/5198H Series Housing
Material and Finish
Contact:Brass
Finish:Tin Plated

How To Order

2220T
T:Terminal

RoHS Compliant

F	17-Apr-2020	revise tolerance	Romina	DRAWN:	GENERAL TOLERANCE: .X=±0.2 .XX=±0.10 $\triangle$.XXX=±0.05	 Neltron Industrial Co., Ltd.	
E	23-Oct-2019	加包裝圖	Lisy	Art			
D	09-Dec-2016	Amend Specifications	Art	CHECKED:	UNIT: MM	DESCRIPTION:	SIZE
C	04-NOV-2009	ECN-CN1008007	Art	APPROVAL:	SCALE: 1:1	3.96mm Wire To Board Crimp Terminal	A4
B	07-JAN-2009	(制五)字第20090106001號	Art		SHEET: 1/2		
A	28-MAR-2008	-(PC0001) (PC0605)	Art		PROJECTION: 	PART NO:	
REV.	DATE	FILE	BY	Mike Wu	2220T		