



2228BX(Brass)
(Material:PBT)

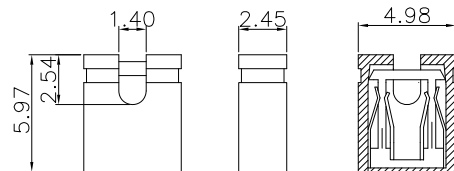


2228CX(Brass)
(Material:PBT)

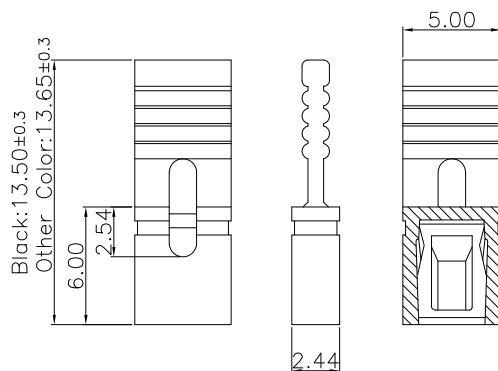

2228GX(Brass)
(Material:Nylon 66)

Specifications:
Current Rating:3.0A AC,DC
Voltage Rating:500V AC,DC
Contact Resistance:30m ohm Max
Insulation Resistance:5000M ohm Min
Withstanding Voltage:650V AC/minute
Operating Temperature Range:-40°C~+105°C



Material:

- Insulator Material:PBT or Nylon 66 (UL94V-0)
- Contact Material:Copper Alloy
- Finish:Gold/Tin Plated
- 2228BX=6.47mm Length Close Type (BK,BU,RD,YL,WH,GN)
- 2228CX=5.97mm Length Open Type (BK,BU,RD,YL,WH,GN)
- 2228GX=13.5mm Length W/Handle (BK)
- 13.65mm Length W/Handle (BU,RD,YL,WH,GN)

How to order

2228XX-XX

- Insulator color
- Standard Black Color
- BU=blue
- RD=red
- YL=yellow
- WH=white
- GN=green
- G:Gold Plated
- G10:10u" Gold Plated
- G15:15u" Gold Plated
- T:Matte Tin Plated
- Type B/C/G

RoHS Compliant

F	28-APR-2023		Jamie	DRAWN:	GENERAL TOLERANCE:	Neltron Industrial Co., Ltd.	
E	14-Mar-2023	add plated option	Jamie	Lisy Liu	.X=±0.20 .XX=±0.15		
D	20-Feb-2023	Modify 2228GG Q'ty	Lisy	CHECKED:	UNIT: MM	DESCRIPTION: 2.54mm Mini Jumper	
C	19-Aug-2022	Add G10u" Options	Lucy	Jerry Chen	SCALE: 1:1		
B	10-Aug-2022	Add G15u" Options	Lisy	APPROVAL:	SHEET: 1/2	PART NO: 2228XX-XX	
A	07-JUL-2022	(P0001)	Lisy	Rory Chen	PROJECTION:		
REV	DATE	FILE	BY				

A4