

Part No	Wire Application	A	B	C	D
2257T-16-XX	16Awg	3.6	4.5	2.3	2.7
2257T-1824-XX	18~24Awg	3.6	4.5	1.9	2.3
2257T-2228-XX	22~28Awg	2.3	2.3	1.8	1.65

Specifications:

Current Rating:9.0A AC/DC

Voltage Rating:600V AC/DC

Contact Resistance:10m Ohm. Max.

Insulation Resistance:1,000M Ohm. Min.

Withstanding Voltage:1500V AC/Minute

Operating Temperature Range:-40°C ~ +105°C

Application Wire:Awg 16~28

Material And Finish:

Insulator:Nylon 66 (UL94V-0)

Color:White

Contact:Brass

Finish:Tin Plated





How To Order

2257-XX-XX

Blank:V2 Material

V0:V0 Material

No. of Positions

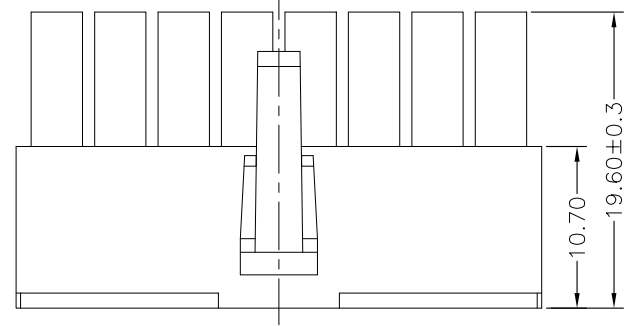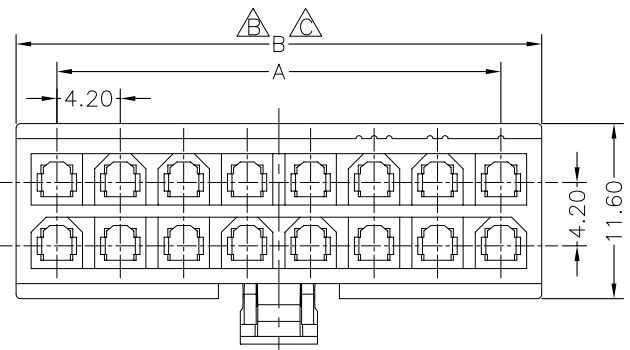

Dimension:

Circuits	DIM.A	DIM.B	DIM.C
2		5.40	
4	4.20	9.60	
6	8.40	13.80	
8	12.60	18.00	
10	16.80	22.20	
12	21.00	26.40	
14	25.20	30.60	
16	29.40	34.80	
18	33.60	39.00	
20	37.80	43.20	
22	42.00	47.40	
24	46.20	51.60	

A & B DIM. TOLERANCE:

2 ~ 8P: A±0.20 B±0.30

10~16P: A±0.30 B±0.40

18~24P: A±0.40 B±0.40


C DIM. TOLERANCE:

2~16P±0.20


18~24P±0.30

RoHS Compliant

F				DRAWN:	GENERAL TOLERANCE:	Neltron Industrial Co., Ltd.		SIZE
E	17-Apr-2020		Jamie Wang	Jamie Wang	.X=±0.25 .XX=±0.20			
D	10-Jan-2017	(L0062)	Jamie Wang	CHECKED:	UNIT: MM	DESCRIPTION:		4.2mm Receptacle Housing
C	22-Jun-2016	ECN-TW1606006	Blake Huang					
B	31-Aug-2015	ECN-TW1508007	Miller Yu	APPROVAL:	SCALE: 1:1	PART NO:		A4
A	29-Jun-2015	(P0001)	Miller Yu		SHEET: 1 / 2			
REV	DATE	FILE	BY	Mike Wu	PROJECTION:	2257-XX-XX		

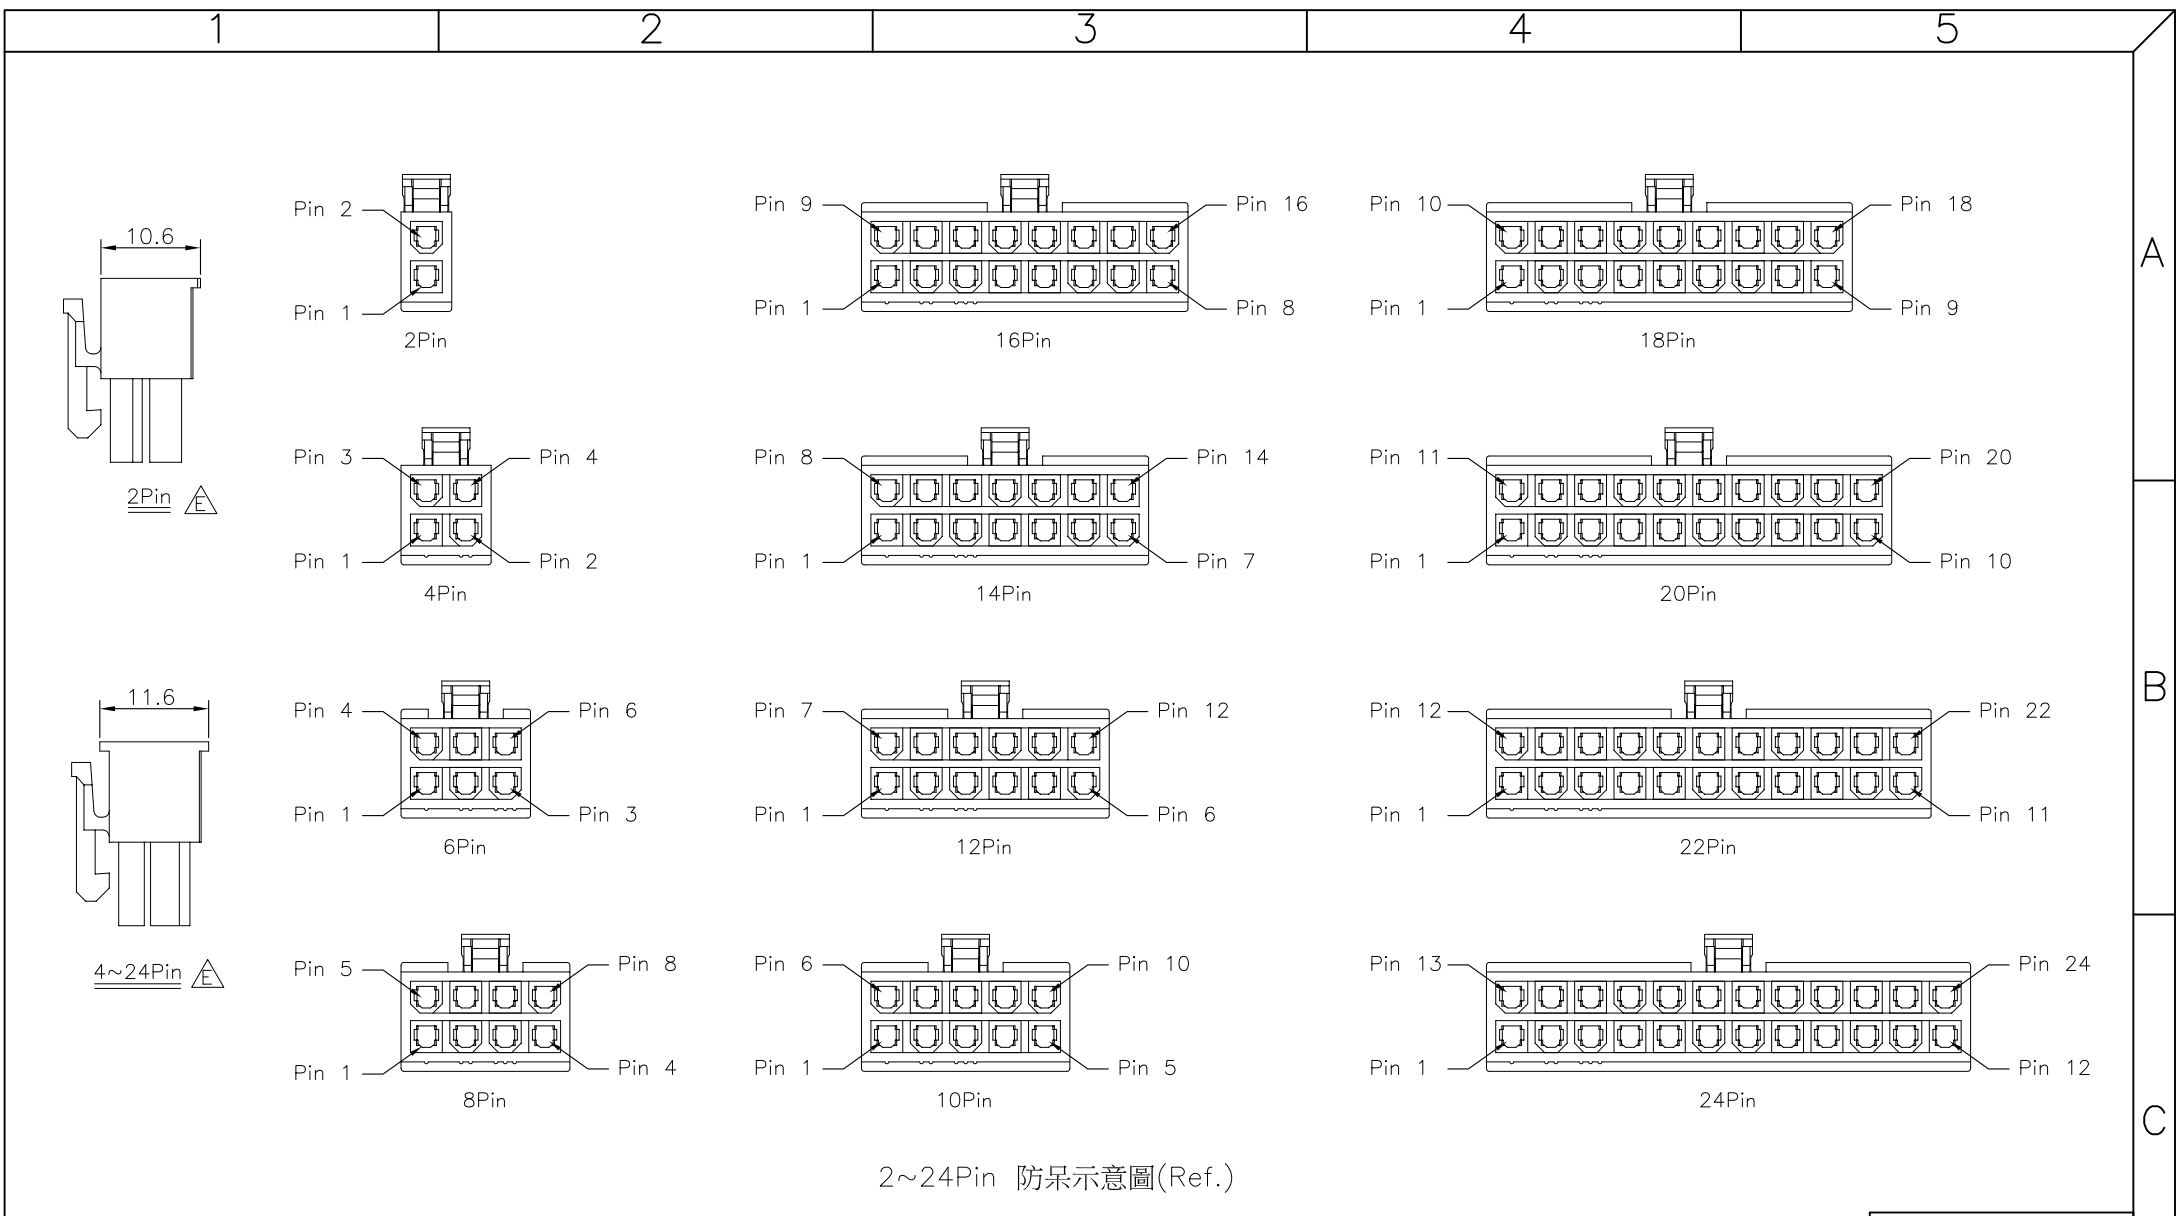

RoHS Compliant

F				DRAWN:	GENERAL TOLERANCE: .X=±0.25 .XX=±0.20	 Neltron Industrial Co., Ltd.			D
E	17-Apr-2020		Jamie Wang	Jamie Wang					
D	10-Jan-2017	(L0062)	Jamie Wang	CHECKED: Jerry Chen	UNIT: MM	DESCRIPTION: 4.2mm Receptacle Housing		SIZE	
C	22-Jun-2016	ECN-TW1606006	Blake Huang		SCALE: 1:1			PART NO: 2257-XX-XX	
B	31-Aug-2015	ECN-TW1508007	Miller Yu	APPROVAL: Mike Wu	SHEET: 2 / 2				
A	29-Jun-2015	(P0001)	Miller Yu		PROJECTION: 				
REV	DATE	FILE	BY						