
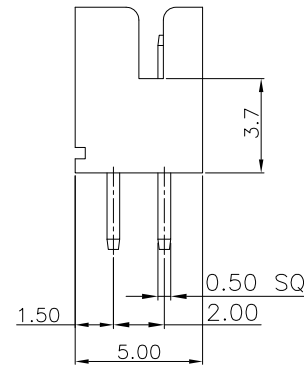
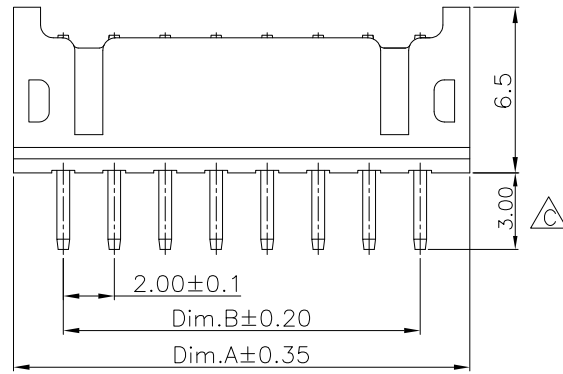


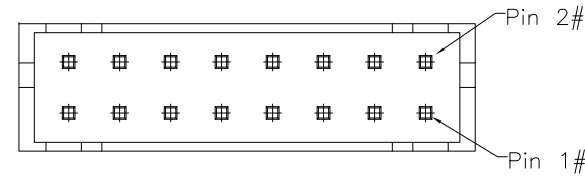


Specifications:
Current Rating:2.0A AC,DC
Voltage Rating:250V AC,DC $\triangle C$
Contact Resistance:20m ohm.Max
Insulation Resistance:1000M ohm.Min
Withstanding Voltage:500V AC/minute
Operating Temperature Range:-25°C~+85°C $\triangle C$

Material:
Insulator:Nylon 66 (UL94V-0)
Insulator Color:Ivory
Contact:Brass
Plated:Tin/Gold Plated $\triangle F$


How To Order
 $\triangle D$ 2417SJ2-XXX
Blank Tin Plated $\triangle F$
G:Gold Plated $\triangle F$
No. of Contacts
Double Rows
Straight Type

Dimension: $\triangle C$

Circuits	Dim.A	Dim.B	Circuits	Dim.A	Dim.B
4	6.0	2.0	22	24.0	20.0
6	8.0	4.0	24	26.0	22.0
8	10.0	6.0	26	28.0	24.0
10	12.0	8.0	28	30.0	26.0
12	14.0	10.0	30	32.0	28.0
14	16.0	12.0	32	34.0	30.0
16	18.0	14.0	34	36.0	32.0
18	20.0	16.0	40	42.0	38.0
20	22.0	18.0			

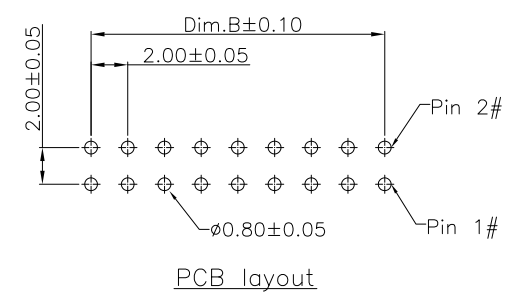

RoHS Compliant

F	02-MAR-2022	Add Gold Plated	Lisy Liu	DRAWN: Cel King	GENERAL TOLERANCE: .X=±0.35 $\triangle C$.XX=±0.25	 Neltron Industrial Co., Ltd.	
E	20-FEB-2020	新增包裝圖	Lisy Liu				
D	26-OCT-2017	ECN-TW1710004	Jack Huang	CHECKED: Jeremy Liu	UNIT: MM SCALE: 1:1	DESCRIPTION: 2.0mm Wire To Board Wafer Straight Type	
C	09-MAY-2014	ECN-TW1405001	Cherry				
B	24-DEC-2013	ECN-TW1312012	Cherry	APPROVAL: Mike Wu	SHEET: 1/2 PROJECTION: 	PART NO: 2417SJ2-XXX $\triangle D$ $\triangle F$	
A	02-JAN-2006	(P0257)	Cel King				
REV	DATE	FILE	BY				

SIZE
A4