

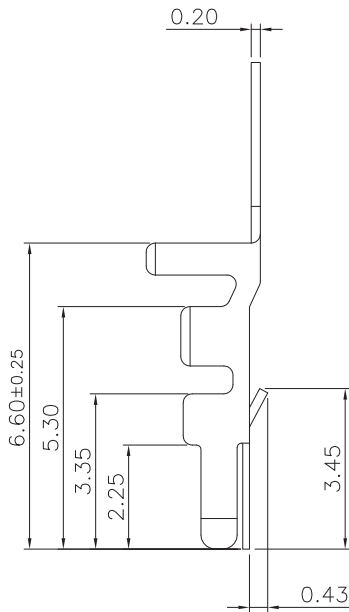


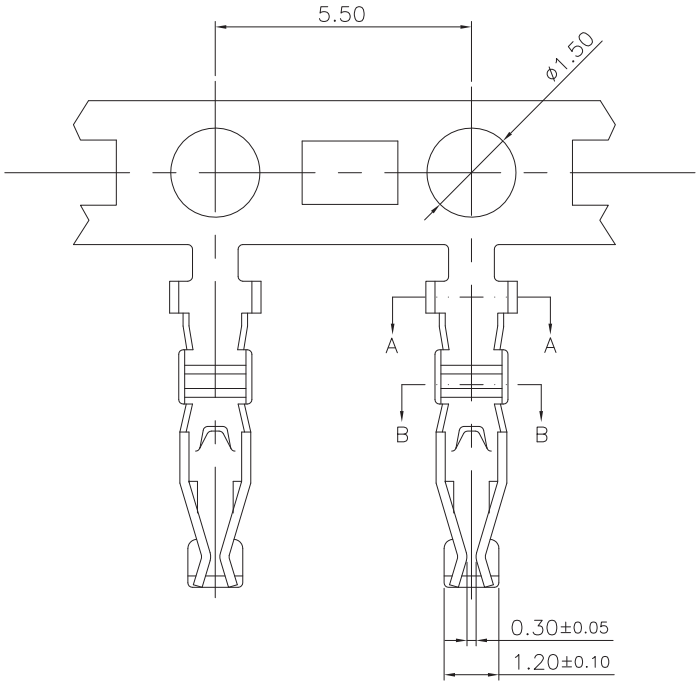


Specifications:
 Current rating:3.0A AC,DC
 Voltage rating:250V AC,DC
 Contact resisittance:20m ohm.Max
 Withstanding voltage:800V AC/minute
 Operating temperature range:-25°C~+85°C

Material and Finish:
 Contact:Copper Alloy
 Plated:Tin/Gold Plated
 Mating With 2418HJ2-XX Series
 Applicable Wire:Awg#22~#28

How To Order:
 2418TJ2X
 Blank Tin Plated
 G:Gold Plated
 Double Row
 Terminal



Section A-A



Section B-B

RoHS Compliant

F				DRAWN: Lucy Du	GENERAL TOLERANCE: .X=±0.25 .XX=±0.20	 Neltron Industrial Co., Ltd.		D
E								
D								
C				CHECKED: Jerry Chen	UNIT: MM	DESCRIPTION: 2.0mm Wire To Board Housing Terminal	SIZE A4	
B					SCALE: 1:1			
A	03-Jun-2019		Lucy Du	APPROVAL: Rory Chen	SHEET: 1/1	PART NO: 2418TJ2X		
REV	DATE	FILE	BY		PROJECTION: 			