



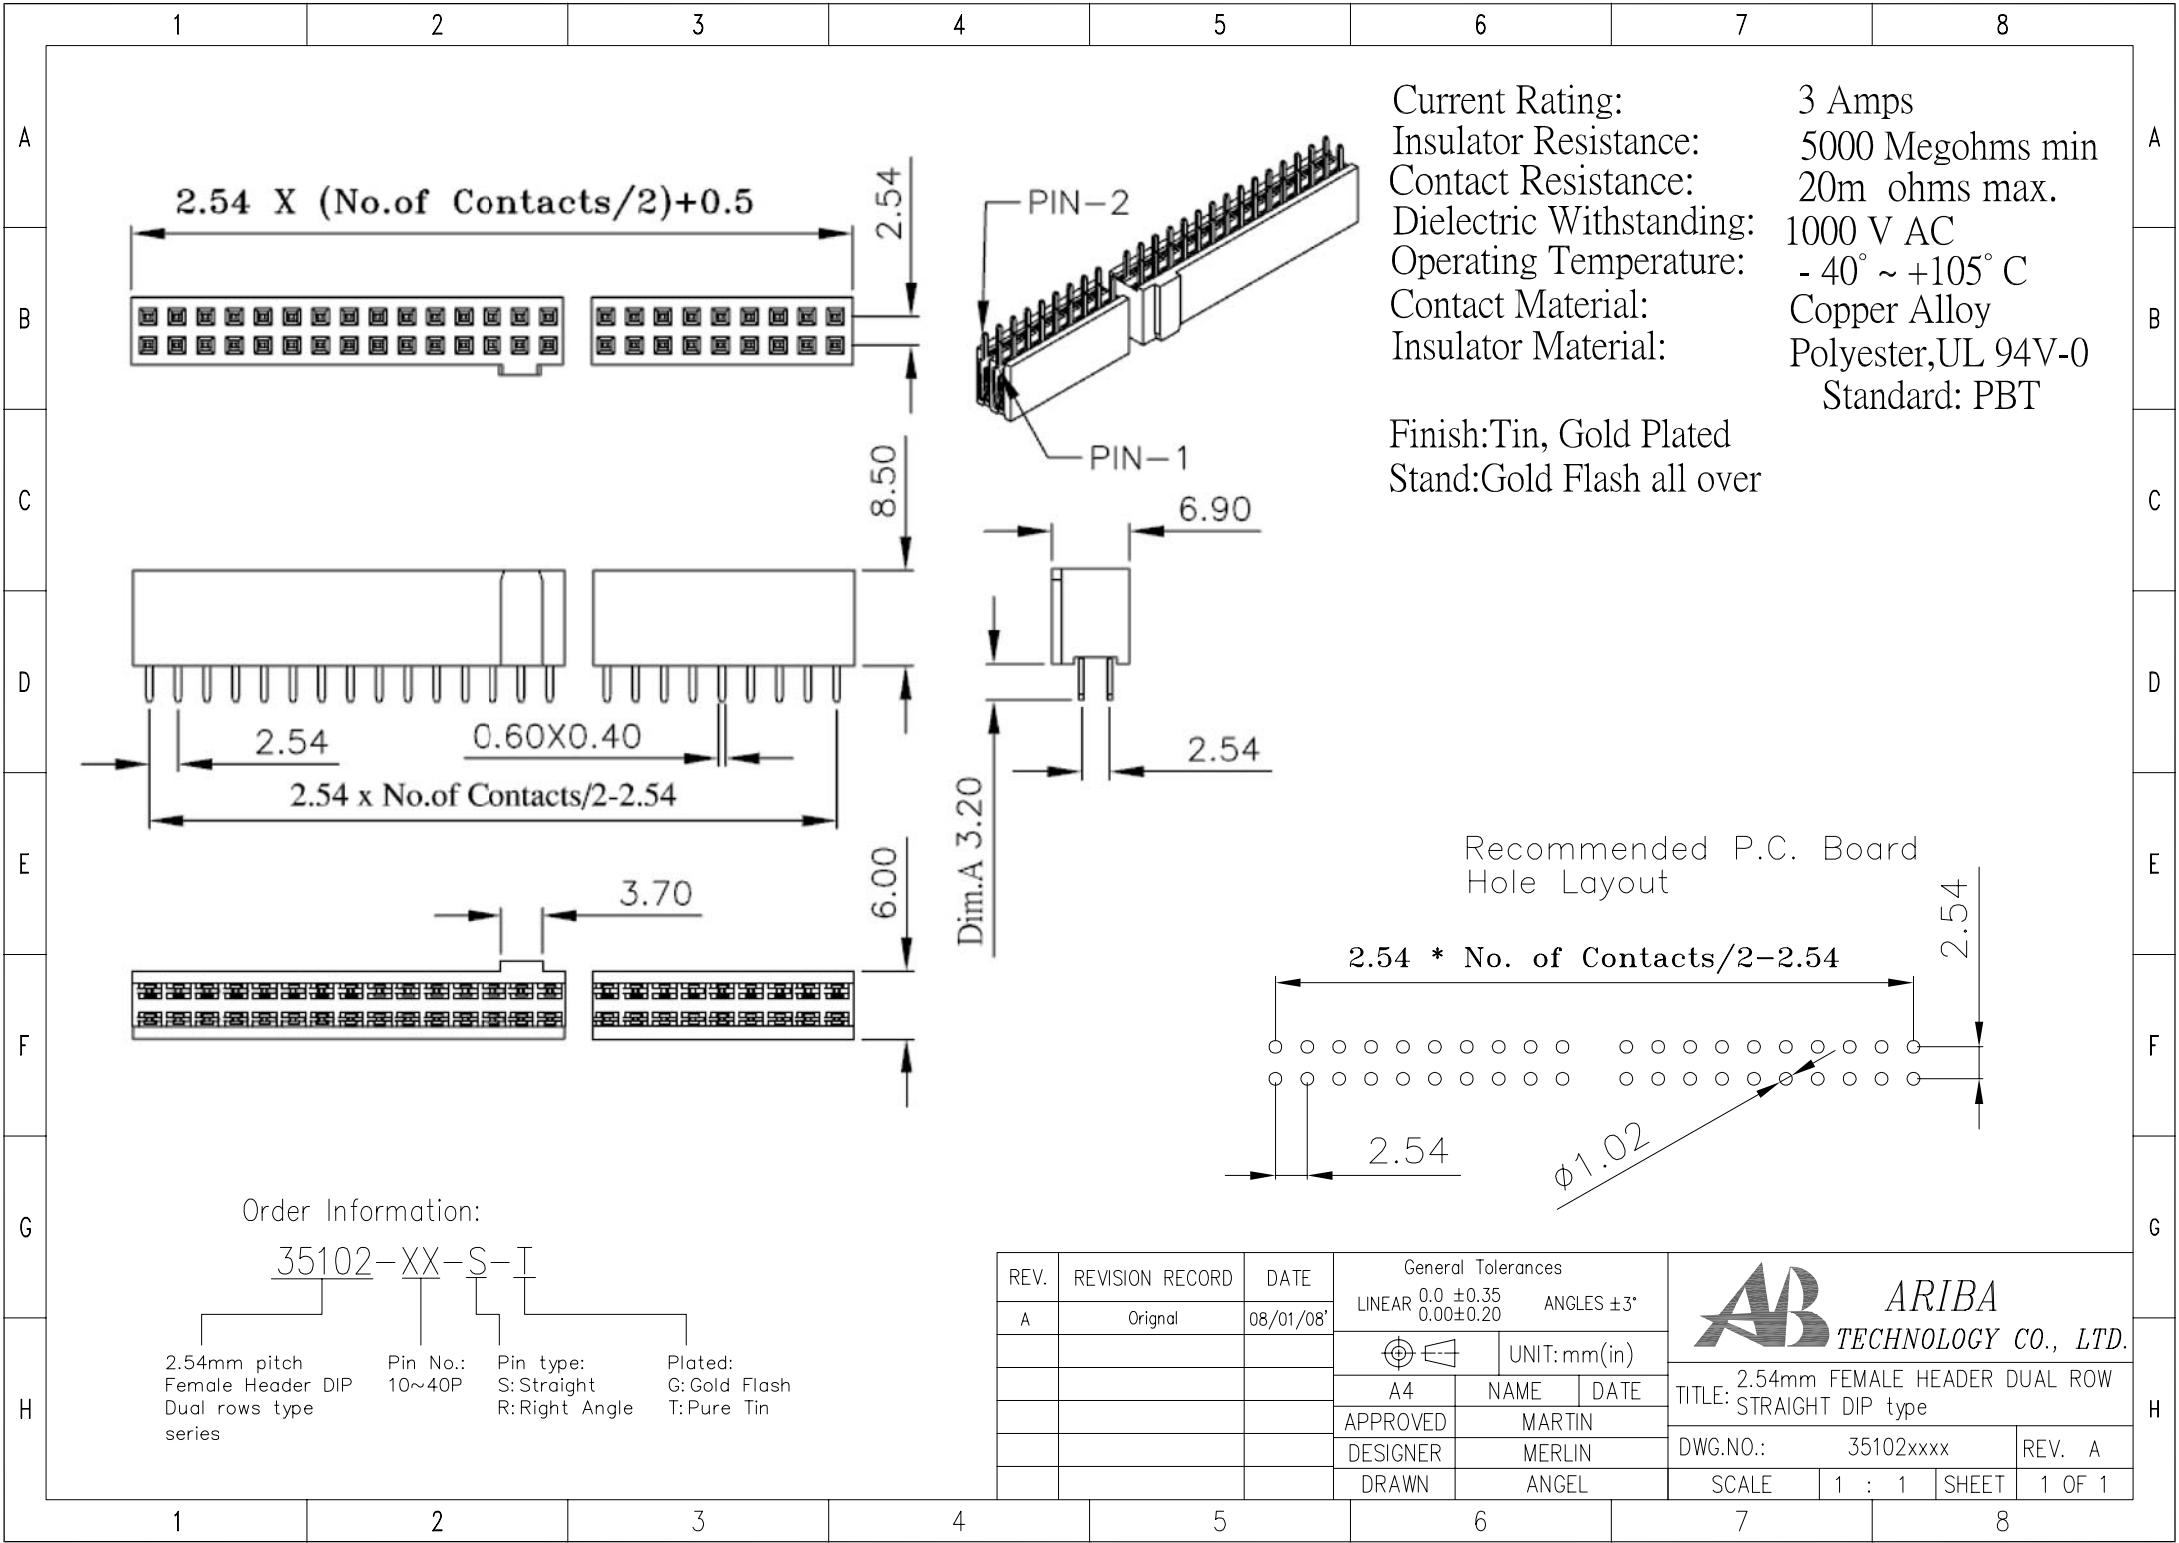

Current Rating: 3 Amps
Insulator Resistance: 5000 Megohms min
Contact Resistance: 20m ohms max.
Dielectric Withstanding: 1000 V AC
Operating Temperature: - 40° ~ +105° C
Contact Material: Copper Alloy
Insulator Material: Polyester,UL 94V-0
Standard: PBT

Finish: Tin, Gold Plated
Stand: Gold Flash all over

Recommended P.C. Board
Hole Layout

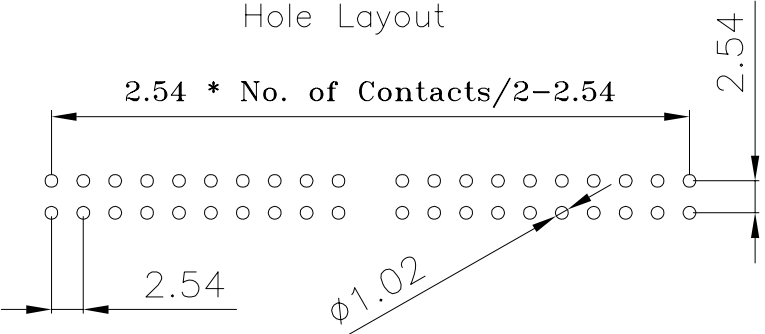

Order Information:

35102-XX-S-I

254mm pitch
Female Header DIP
Dual rows type
series

Pin No.:
10~40P

Pin type:
S: Straight
R: Right Angle

Plated:
G: Gold Flash
T: Pure Tin

REV.	REVISION RECORD	DATE	General Tolerances			ARIBA TECHNOLOGY CO., LTD.			
A	Original	08/01/08'	LINEAR	0.0 ±0.35 0.00±0.20	ANGLES ±3°				
			UNIT:mm(in)			TITLE: 2.54mm FEMALE HEADER DUAL ROW STRAIGHT DIP type			
			A4	NAME	DATE				
			APPROVED	MARTIN		DWG.NO.: 35102xxxx		REV. A	
			DESIGNER	MERLIN					
			DRAWN	ANGEL		SCALE	1 : 1	SHEET	1 OF 1