
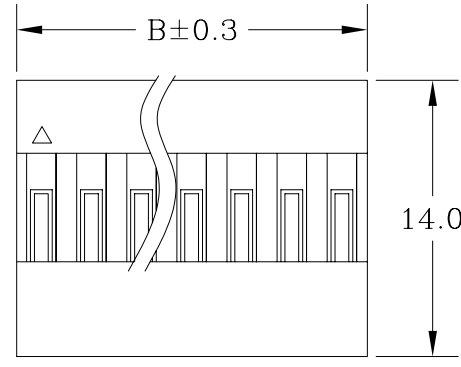


REV	ECN NO.	DESCRIPTION	DATE
A		RELEASE	JAN.10.02

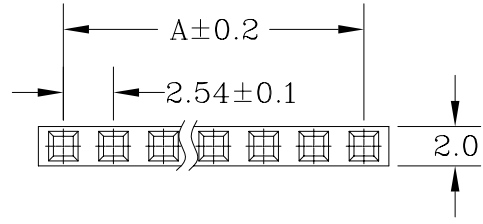

POLES	A	B	POLES	A	B
02	2.54	5.08	21	50.80	53.34
03	5.08	7.62	22	53.34	55.88
04	7.62	10.16	23	55.88	58.42
05	10.16	12.70	24	58.42	60.96
06	12.70	15.24	25	60.96	63.50
07	15.24	17.78	26	63.50	66.04
08	17.78	20.32	27	66.04	68.58
09	20.32	22.86	28	68.58	71.12
10	22.86	25.40	29	71.12	73.66
11	25.40	27.94	30	73.66	76.20
12	27.94	30.48	31	76.20	78.74
13	30.48	33.02	32	78.74	81.28
14	33.02	35.56	33	81.28	83.82
15	35.56	38.10	34	83.82	86.36
16	38.10	40.64	35	86.36	88.90
17	40.64	43.18	36	88.90	91.44
18	43.18	45.72	37	91.44	93.98
19	45.72	48.26	38	93.98	96.52
20	48.26	50.80	39	96.52	99.06
			40	99.06	101.6

SPECIFICATION

- *Poles: 1-40
- *Voltage rating: 250V AC, 350V DC
- *Current Rating: 3A, AC, DC
- *Withstand voltage: 1000V AC/minute
- *Insulation resistance: 1000MΩ min
- *Temperature range: -25°C ~ +85°C
(Including temperature rise in applying electrical current)
- *Applicable PC board thickness: .063"(1.6mm)
- Contact resistance: Initial Value/10mΩ max
After environmental testing/20mΩ max

HOUSING

- *Part No: 4000**
- *Poles: 1-40
- *Material: Noryl ,UL 94V-1
- *Q'ty: 1000pcs/bag

TOLERANCE UNLESS OTHERWISE SPECIFIED		PROJECTION	GOLD-TEK ELECTRIC CO., LTD.	
LINEAR	ANGLE	UNITS	TITLE	PART NO.
X. ±	X° ±		CRIMP TERMINAL HOUSING PITCH:2.54MM	4000**
.X ± 0.2	.X° ±	MM	IPART NO	CAD NO. I056
.XX ±	.XX° ±	SCALE	JS-1108-**	F:\Drw\HW-A\HW-A0007
.XXX±	.XXX°±	SIZE		SHEET 1 OF 1
APPD		A4	圖面編號:GTKSD0012-A(1)	
CHKD				
DRAW	Tao.Tao. MAY.08.2002			