

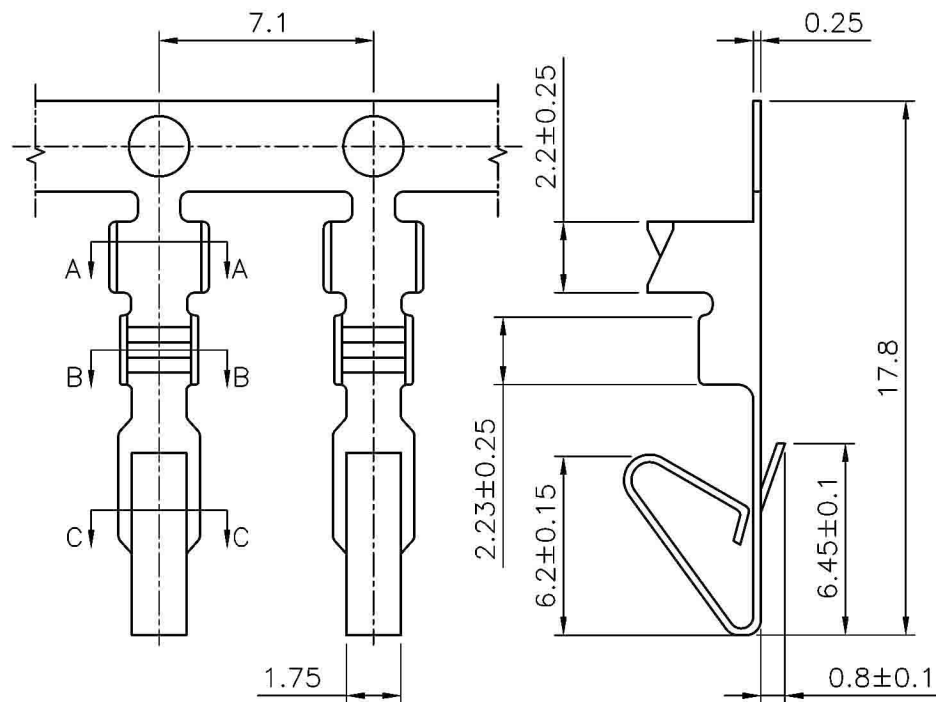


A-A SEC



B-B SEC

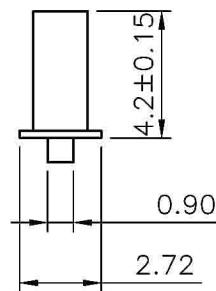

C-C SEC

RoHS COMPLIANT

REV	ECN NO.	DESCRIPTION	DATE
A		REDRAW	FEB.21.06
B		MODIFY P/N	MAR. 02'11

SPECIFICATIONS

- Voltage Rating : 250V AC/DC
- Current Rating : 5A AC/DC
- Withstanding Voltage : 1,500V AC/minute
- Insulation Resistance : 1,000M Ω min
- Temperature Range : - 25°C to + 85°C
- Contact Resistance : 20m Ω max

TERMINAL

- Applicate Wires : AWG# 18 - 24
- Material : Brass
- Finish : Tin Plated or Gold Plated
- Thickness : 0.25mm
- Q' ty : 6,000 pcs./Reel

TOLERANCE UNLESS
OTHERWISE SPECIFIED

LINEAR	ANGLE
X. ±	X° ±
.X ± 0.30	.X° ±
.XX ± 0.20	.XX° ±
.XXX ± 0.10	.XXX° ±
APPD	
CHKD	
DRAW	Z
	MAR. 02'2011

PROJECTION



UNITS

MM

SCALE

SIZE

A4



GOLD-TEK ELECTRIC CO., LTD.

TITLE
PITCH:3.96mm
TERMINAL

CPART NO.

PART NO.
5001T(G)

CAD NO. I056
F:\PDF\HW\HW-A0101

SHEET
1 OF 1

圖面編號: GTKSD0008-B(1)