




1

2

3

4

5

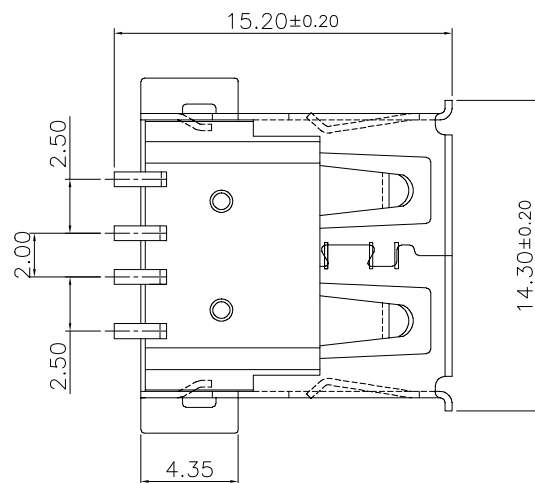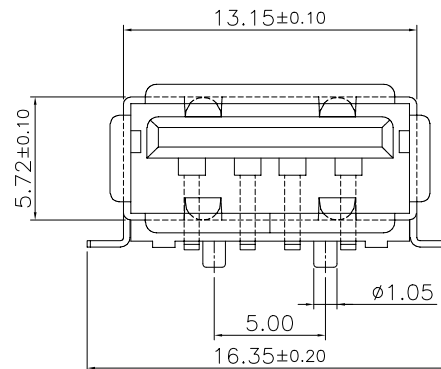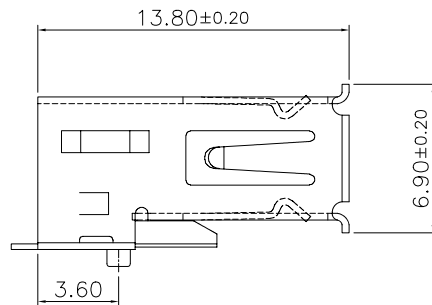

Specifications:

Current Rating:1.5A AC/DC

Voltage Rating:30V AC/DC

Contact Resistance:30m ohm. Max.

Insulation Resistance:1,000M ohm. min.

Withstanding Voltage:500V AC For One Minute

Operating Temperature Range:-30°C ~ +85°C

Material and Finish

Insulator:LCP(UL94V-0)

Terminal:Brass

Plating:Gold Plated on Contact Area,

Tin Plated on Solder Tail.

Shell:Brass,Nickel Plated



How To Order

5075AR-04-SM-XX-XXXX

Blank Tray

TR:Tape&Reel

Blank:1u" Gold Plated

30:30u" Gold Plated

15:15u" Gold Plated


BK:Black

WH:White

SMD Type


No. Of Contacts

A Type R/A

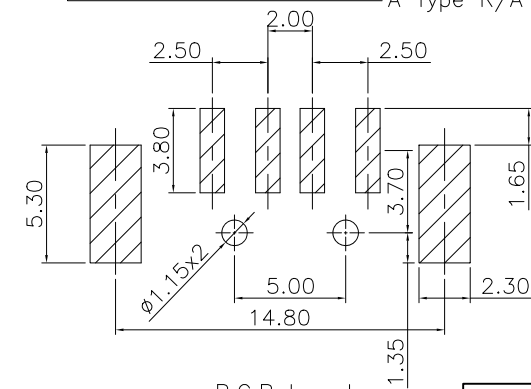

P.C.B layout

RoHS Compliant

F				DRAWN: Romina Wu	GENERAL TOLERANCE: .X=±0.20 .XX=±0.10	 Neltron Industrial Co., Ltd.		DESCRIPTION: USB A Type SMD R/A Type Socket 4P	SIZE A4	D
E	21-Sep-2023		Jamie Chuang							
D	20-Jun-2023		Jamie Chuang	CHECKED: Jerry Chen	UNIT: MM					
C	18-Jan-2022		Lisy Liu		SCALE: 1 : 1					
B	09-Sep-2020	Add Packing	Romina Wu	APPROVAL: Mike Wu	SHEET: 1/3	PART NO: 5075AR-04-SM-XX-XXXX  				
A	02-Jan-2019	(PC0604)	Romina Wu		PROJECTION: 					
REV	DATE	FILE	BY							