




1

2

3

4

5

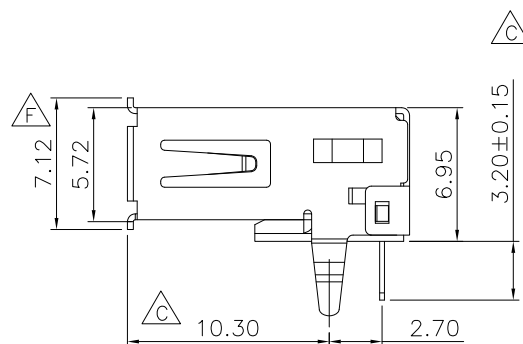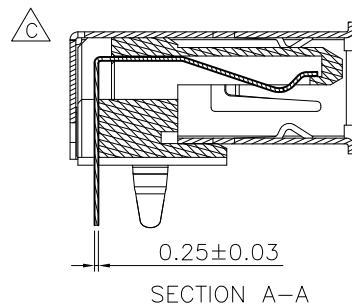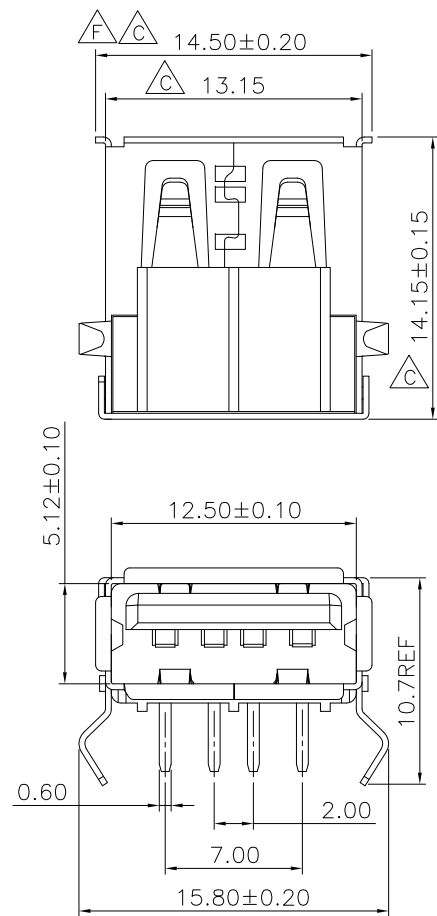

Specifications:

Current Rating:1.5A AC/DC

Voltage Rating:30V AC/DC

Contact Resistance:30m ohm. Max.

Insulation Resistance:1,000M ohm. min.

Withstanding Voltage:500V AC For One Minute

Operating Temperature Range:-55°C ~ +85°C

Material and Finish

Insulator:PBT&PA9T(UL94V-0)

Contact:Phosphor Bronze

Plating:Gold Plated 1U"&15u"&30u"

Tin Plated on Solder Tail.

Shell:Brass,Nickel Plated 100U"

How To Order

5075AR-04-XX-XX-XX

Blank:PBT

F5:PA9T


Blank Standard Gold Plated 1u"

30:Selective Gold Plated 30u"

15:Selective Gold Plated 15u"

BK:Black

WH:White

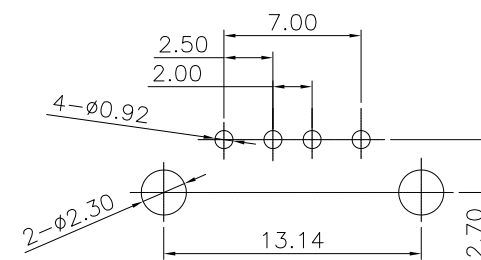

PCB LAYOUT

RoHS Compliant

				DRAWN:	GENERAL TOLERANCE:	 Neltron Industrial Co., Ltd.	
				Richie	.X=±0.20 .XX=±0.15		
				CHECKED:	UNIT: MM	DESCRIPTION:	
				Jeremy Liu	SCALE: 1:1		
G	25-Mar-2021	修改描述	Ben	APPROVAL:	SHEET: 1/2	PART NO:	
A	05-Nov-2010		Richie		PROJECTION:		
REV	DATE	FILE	BY	Mike Wu		5075AR-04-XX-XX-XX	SIZE
							A4